



EMC TEST REPORT

Test Report No. : KES-EM-22T0285
Date of Issue : Mar. 30, 2022
Product name : DVR
Model/Type No. : HRX-1635
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Mar. 02, 2022
Test date : Mar. 07, 2022 ~ Mar. 11, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (2) of (32)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 30, 2022	KES-EM-22T0285	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (3) of (32)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz)		22
Test Setup Photos and Configuration		23
Conducted Emissions at Mains Power Ports.....		23
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz)		25
EUT External Photographs		26
EUT Internal Photographs		27

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (4) of (32)

1.0 General Product Description

Main Specifications of EUT are:

Display		
Analog camera	Inputs	16CH(1Vp-p 75ohm, BNC)
	Signal Type	- AHD(8MP, 5MP, 4MP, 1080p, 720p) - HDTVI(8MP, 5MP, 4MP, 1080p, 720p) - HDCVI(8MP, 5MP, 4MP, 1080p, 720p) - NTSC/PAL
Network camera	Inputs	2CH (Up to 16CH)
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160, 2560x1440, 1920x1080, 1280x1044, 1280x720 (Expand mode 1920x1080) VGA: 1920x1080, 1280x1024, 1280x720 (Expand 1024*768)
	Multi Screen Display	[Local monitor] Dynamic layout/Sequence, [Web] 1 / 4 / 9 / sequence
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps), 1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(480fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	(Main Stream, NT/PAL) 8M 8/8fps, 5M 12/12fps, 4M 15/12fps, 2M 30/25fps, 720p 30/25fps, Under 960H 30/25fps/CH (Sub Stream) 720p/CH or Higher : 640x360 Full fps, SD : upto SD Full fps * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 128Mbps (H.264-1635)
	Resolution	8MP ~ CIF
	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event, Dynamic camera event
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Playback Bandwidth	Max. 32Mbps (16CH simultaneously)
	User	Max. 4 users (Set 1, Remote 3)
	Simultaneous playback	16CH(Local Monitor), 16Ch (CMS), 4Ch (Wisenet Mobile), 1Ch(Web)
	Fisheye Dewarping	WEB / CMS
	Search Mode	Date & Time (Calendar) / Event log list / Text search (POS), Back up, Motion, Smart search (Virtual Line w/ direction, Enter / Exit) * All Search Included Preview Function ARB search
	Resolution	8MP ~ CIF
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA Bay(Max. 48TB)
Backup	File backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 16 CH play, Date-time/title display
Network		
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Wisenet DDNS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (5) of (32)

Transmission speed		- Analog Camera(NTSC/PAL) (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH (Sub Stream) HD 640x360 full fps/CH, SD upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
Transmission Bandwidth		Max. 100Mbps
Audio	Input/Output	16 Uline in (RCA 4 Line, Option : Audio Extension Cable) / 1Line line out
	Compression	G.711 (NW Cam G.711, 726)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Techwin Root CA)
Web viewer	Supported OS	Windows 10, Mac OS 11 Big Sur and later
	Supported browser	Chrome v99 / Edge v99 /Safari v14.0.3 Higher (2022/03)
Viewer Software		SSM, Webviewer, SmartViewer, Wisenet Mobile Viewer, Wisenet Viewer Support SDK/CGI(SUNAPI) for integration to 3rd party VMS
Functions		
Camera Setup	Register	Auto, Manual
	Item	None
PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
	Preset	300 presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max. Remote Users	Search(3), Live Unicast(10)
Easy configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI
Interface		
Front	Indicator	LED(Status Indicator) : Power(1), HDD Action(1), Alarm(1), Record(1), Network(1), Backup(1)
Reset		Switch(1EA)
HDMI		1EA
VGA		1EA
BNC		16CH In / 1CH Out(Spot Output)
Ethernet		RJ-45(10/100/1000BASE-T)
Alarm		In 16EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
USB		2EA(Front USB2.0, Rear USB 3.0))
Serial(Protocols)		RS-485/422 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power inlet		1EA AC (AC100~240V)
System		
Log	Log List	Max. 100,000 (System Log, Event Log each), (HRX-1632)
System Control		Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
Operating Temperature		0°C to +40°C(+32°F to +104°F)
Operating Humidity		20% ~ 85% RH

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (6) of (32)

Certification		UL, CE, FCC, KC, UKCA
Electrical		
Power Input		100~240 VAC±10%, 50/60 Hz
Power Consumption		Max. 200W (6T HDD 8ea)
PoE Budget		None
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		440 x 88 x 384.8mm(17.32" x 3.46" x 15.15")
Weight		Approx. 5.7Kg (4TB HDD 1ea)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	HRX-1635	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
HDD	ST2000VX012	WFM30EFP	SEAGATE	2 TB

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (8) of (32)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	P98F004	21599158359	DELL INC.	-
Notebook Adapter	LA240PM190	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Monitor 1	SMT-2232	C95V67VF90002 5B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	SMT-2232	C95V67VF90003 8B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 3	DELL E2222H DVT	8221TCM10D001 03X	DELL INC.	-
Speaker	E5	-	PreSonus®	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Controller Adapter	-	-	-	-
Alarm	PRO-SL	-	SENSOR PRO	-
ButtonAlarm	-	-	-	-
Camera 1	SCD-6083RN	-	TB-eye Ltd.	-
Camera 1 Adapter	KP-1220	JH10099-15001	KEPCO	-
Camera 2	HCV-6070R	-	HANWHA TECHWIN CO.,LTD.	-
Camera 2 Adapter	DAD12050DKA	KTLSA10022- 8001	Dream Electronics Inc.	-
NETWORK VIDEO ENCODER 1	SPE-410	-	HANWHA TECHWIN CO.,LTD.	-
NETWORK VIDEO ENCODER 1 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
NETWORK VIDEO ENCODER 2	SPE-410	-	HANWHA TECHWIN CO.,LTD.	-
NETWORK VIDEO ENCODER 2 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
USB Memory	-	-	NOVOMATIC	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	USB 2.0	Mouse (EUT)	USB	1.5	U
	RJ-45	Notebook	RJ-45	-	S
	AUDIO IN	Notebook	3.5 mm	1.6	U
	AUDIO IN	Notebook	3.5 mm	1.6	U
	SPOT	Monitor 1	BNC	3.5	S
	D-SUB	Monitor 2	D-SUB	1.8	S
	HDMI	Monitor 3	HDMI	2.0	S
	AUDIO OUT	Speaker	RCA	2.8	U
	RS-485	Controller	RS-485	4.0	U
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	ButtonAlarm	Alarm OUT	3.0	U
	BNC	NETWORK VIDEO ENCODER 1	BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC	NETWORK VIDEO ENCODER 2	BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (10) of (32)

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	BNC	NETWORK VIDEO ENCODER 2	BNC	10.0	U
	USB 3.0	USB Memory	USB	-	-
NETWORK VIDEO ENCODER 1	BNC	Camera 1	BNC	1.6	U
NETWORK VIDEO ENCODER 2	BNC	Camera 2	BNC	1.5	U
Notebook	DC Jack	Notebook Adapter	DC Jack	2.2	S
Controller	DC Jack	Controller Adapter	DC Jack	1.8	U
NETWORK VIDEO ENCODER 1	2 Pin	NETWORK VIDEO ENCODER 1 Adapter	2 Pin	2.0	U
NETWORK VIDEO ENCODER 2	2 Pin	NETWORK VIDEO ENCODER 2 Adapter	2 Pin	2.0	U
Camera 1	2 Pin	Camera 1 Adapter	2 Pin	1.8	U
Camera 2	2 Pin	Camera 2 Adapter	2 Pin	2.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
Operating Mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.8 Configuration

■ AC Main
 □ DC Main

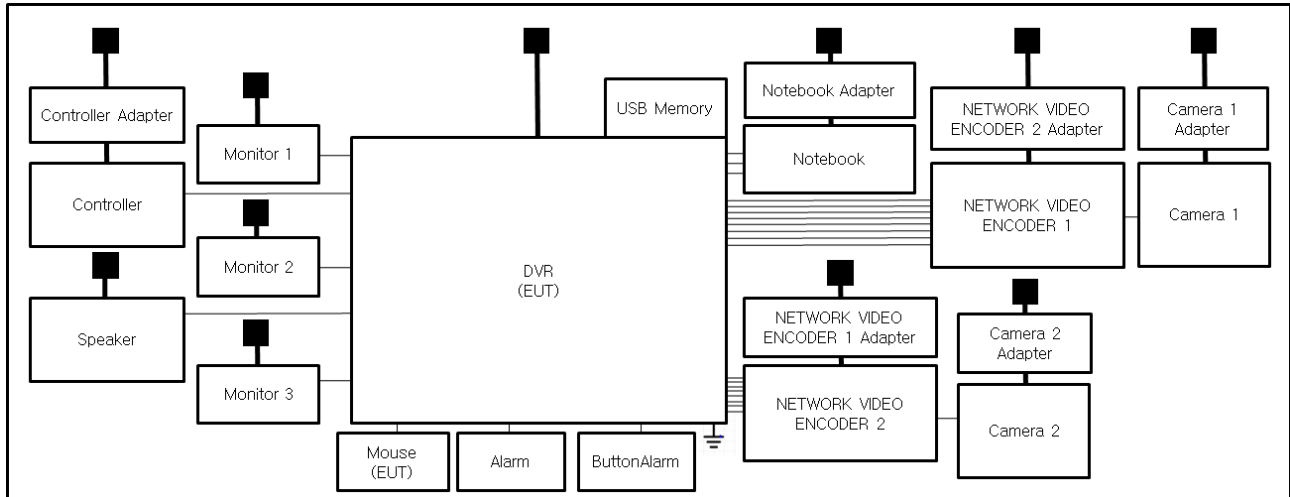

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

1.9 Remarks when standards applied

N/A







1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B



2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 27, 2022
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (43,5 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 07, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (23,7 ± 0,2) °C
Relative Humidity: (43,7 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 08, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	04, 01, 2022
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

Test Conditions

Temperature: (23,2 ± 0,2) °C

Relative Humidity: (43,1 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (17) of (32)


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: HRX-1635
Phase:
Mode: H
Operator Name: KES

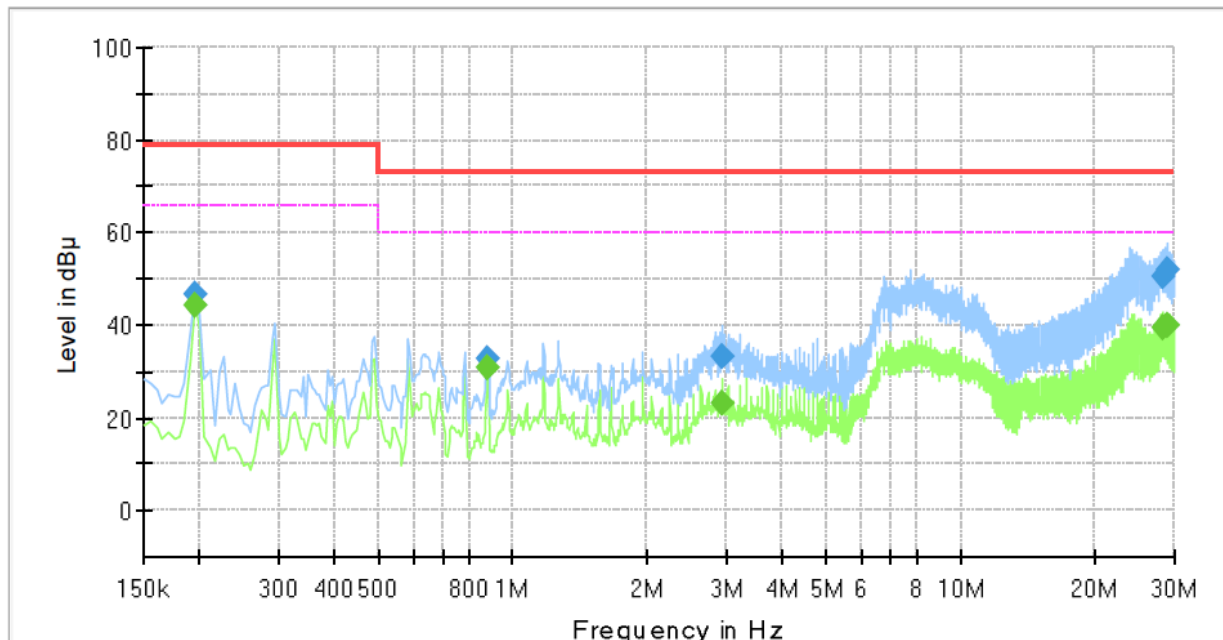

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	44.07	66.00	21.93	1000.0	9.000	L1	19.4
0.195000	46.62	---	79.00	32.38	1000.0	9.000	L1	19.4
0.880000	---	31.00	60.00	29.00	1000.0	9.000	L1	20.1
0.880000	32.74	---	73.00	40.26	1000.0	9.000	L1	20.1
2.945000	---	23.34	60.00	36.66	1000.0	9.000	L1	20.2
2.945000	33.26	---	73.00	39.74	1000.0	9.000	L1	20.2
28.280000	---	39.60	60.00	20.40	1000.0	9.000	L1	20.3
28.280000	50.64	---	73.00	22.36	1000.0	9.000	L1	20.3
28.850000	---	39.81	60.00	20.19	1000.0	9.000	L1	20.3
28.850000	51.76	---	73.00	21.24	1000.0	9.000	L1	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (18) of (32)

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	HRX-1635
Phase:	
Mode:	N
Operator Name:	KES

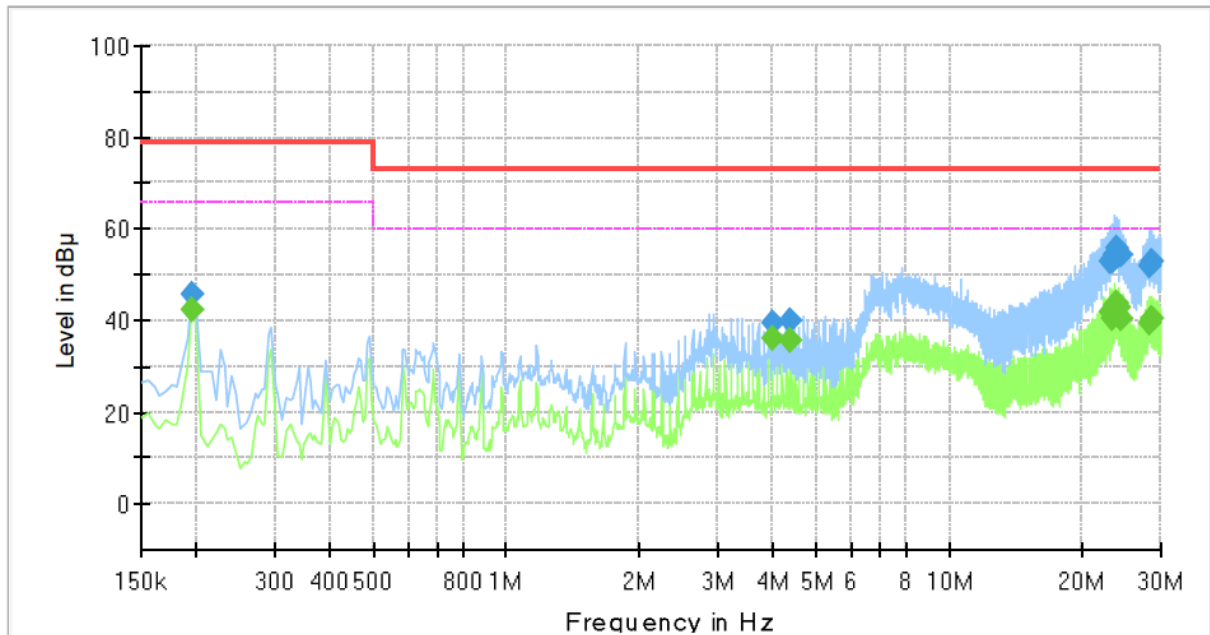

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (19) of (32)

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	45.64	---	79.00	33.36	1000.0	9.000	N	19.4
0.195000	---	42.19	66.00	23.81	1000.0	9.000	N	19.4
4.000000	39.44	---	73.00	33.56	1000.0	9.000	N	19.9
4.000000	---	35.94	60.00	24.06	1000.0	9.000	N	19.9
4.390000	39.72	---	73.00	33.28	1000.0	9.000	N	19.8
4.390000	---	35.76	60.00	24.24	1000.0	9.000	N	19.8
23.020000	53.09	---	73.00	19.91	1000.0	9.000	N	20.1
23.020000	---	41.78	60.00	18.22	1000.0	9.000	N	20.1
23.340000	52.78	---	73.00	20.22	1000.0	9.000	N	20.1
23.340000	---	40.43	60.00	19.57	1000.0	9.000	N	20.1
23.510000	---	43.03	60.00	16.97	1000.0	9.000	N	20.1
23.510000	54.30	---	73.00	18.70	1000.0	9.000	N	20.1
23.610000	---	43.21	60.00	16.79	1000.0	9.000	N	20.1
23.610000	54.30	---	73.00	18.70	1000.0	9.000	N	20.1
23.990000	---	43.65	60.00	16.35	1000.0	9.000	N	20.1
23.990000	55.76	---	73.00	17.24	1000.0	9.000	N	20.1
24.190000	---	42.96	60.00	17.04	1000.0	9.000	N	20.1
24.190000	54.44	---	73.00	18.56	1000.0	9.000	N	20.1
24.405000	---	40.33	60.00	19.67	1000.0	9.000	N	20.1
24.405000	54.45	---	73.00	18.55	1000.0	9.000	N	20.1
28.435000	---	39.60	60.00	20.40	1000.0	9.000	N	20.3
28.435000	51.80	---	73.00	21.20	1000.0	9.000	N	20.3
28.710000	---	40.52	60.00	19.48	1000.0	9.000	N	20.3
28.710000	53.13	---	73.00	19.87	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

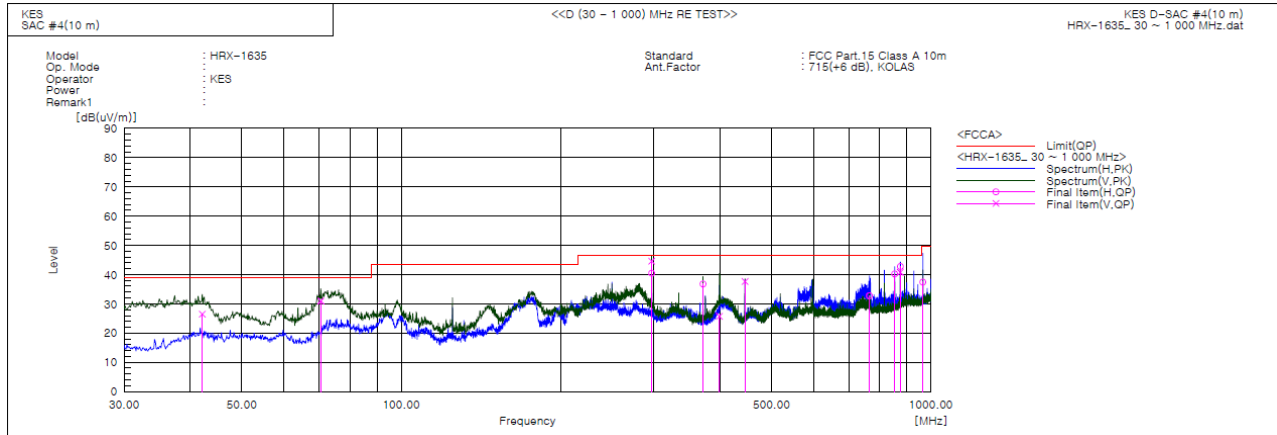

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.125	V	48.4	-21.9	26.5	39.0	12.5	150.0	233.0	
2	70.498	V	56.1	-25.1	31.0	39.0	8.0	148.0	101.0	
3	296.993	H	58.6	-18.1	40.5	46.5	6.0	400.0	206.0	
4	297.012	V	62.7	-18.1	44.6	46.5	1.9	100.0	177.0	
5	371.319	H	51.7	-14.9	36.8	46.5	9.7	269.0	187.0	
6	398.721	V	40.0	-14.2	25.8	46.5	20.7	156.0	66.0	
7	445.524	V	50.9	-13.2	37.7	46.5	8.8	112.0	196.0	
8	765.381	H	39.3	-6.5	32.8	46.5	13.7	298.0	9.0	
9	853.894	H	45.6	-5.4	40.2	46.5	6.3	400.0	29.0	
10	874.991	V	45.4	-4.6	40.8	46.5	5.7	108.0	215.0	
11	875.113	H	47.4	-4.6	42.8	46.5	3.7	392.0	32.0	
12	965.237	H	40.8	-3.4	37.4	49.5	12.1	385.0	2.0	




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0285
Page (21) of (32)

- IC Regulation ICES-003 Issue 7

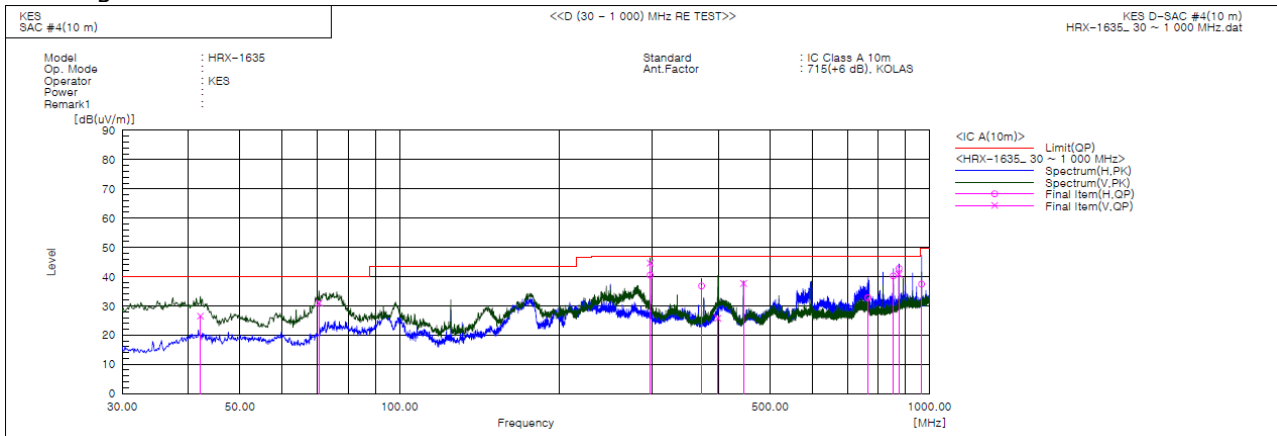

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.125	V	48.4	-21.9	26.5	40.0	13.5	150.0	233.0	
2	70.498	V	56.1	-25.1	31.0	40.0	9.0	148.0	101.0	
3	296.993	H	58.6	-18.1	40.5	47.0	6.5	400.0	206.0	
4	297.012	V	62.7	-18.1	44.6	47.0	2.4	100.0	177.0	
5	371.319	H	51.7	-14.9	36.8	47.0	10.2	269.0	187.0	
6	398.721	V	40.0	-14.2	25.8	47.0	21.2	156.0	66.0	
7	445.524	V	50.9	-13.2	37.7	47.0	9.3	112.0	196.0	
8	765.381	H	39.3	-6.5	32.8	47.0	14.2	298.0	9.0	
9	853.894	H	45.6	-5.4	40.2	47.0	6.8	400.0	29.0	
10	874.991	V	45.4	-4.6	40.8	47.0	6.2	108.0	215.0	
11	875.113	H	47.4	-4.6	42.8	47.0	4.2	392.0	32.0	
12	965.237	H	40.8	-3.4	37.4	49.5	12.1	385.0	2.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0285

Page (22) of (32)

Radiated Electric Field Emissions(Above 1 GHz)

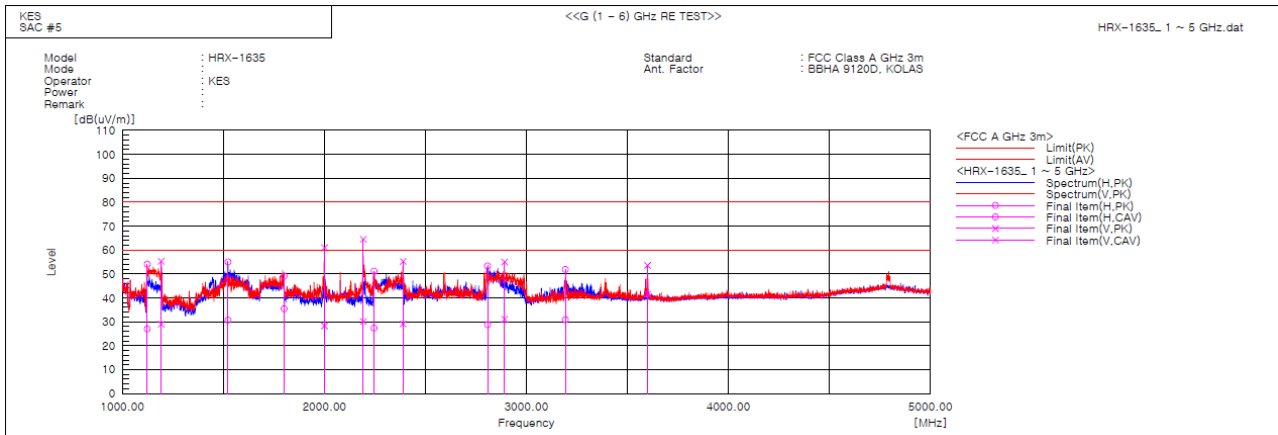

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1123.125	H	61.1	34.0	-7.0	54.1	27.0	80.0	60.0	25.9	33.0	114.0	345.0	
2	1191.875	V	62.0	35.7	-6.7	55.3	29.0	80.0	60.0	24.7	31.0	120.0	2.5	
3	1523.125	H	59.9	35.5	-4.8	55.1	30.7	80.0	60.0	24.9	29.3	358.0	292.1	
4	1800.625	H	52.8	39.2	-3.7	49.1	35.5	80.0	60.0	30.9	24.5	400.0	293.3	
5	2000.027	V	63.8	31.1	-2.8	61.0	28.3	80.0	60.0	19.0	31.7	149.0	202.9	
6	2192.509	V	66.9	32.6	-2.4	64.5	30.2	80.0	60.0	15.5	29.8	112.0	101.1	
7	2246.352	H	53.4	29.6	-2.2	51.2	27.4	80.0	60.0	28.8	32.6	346.0	73.2	
8	2389.709	V	56.8	30.7	-1.6	55.2	29.1	80.0	60.0	24.8	30.9	150.0	39.1	
9	2807.875	H	53.0	28.4	0.4	53.4	28.8	80.0	60.0	26.6	31.2	289.0	89.9	
10	2892.023	V	54.3	30.4	0.7	55.0	31.1	80.0	60.0	25.0	28.9	156.0	337.9	
11	3193.284	H	50.4	29.4	1.5	51.9	30.9	80.0	60.0	28.1	29.1	295.0	97.2	
12	3599.629	V	51.7	39.7	1.9	53.6	41.6	80.0	60.0	26.4	18.4	105.0	182.6	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

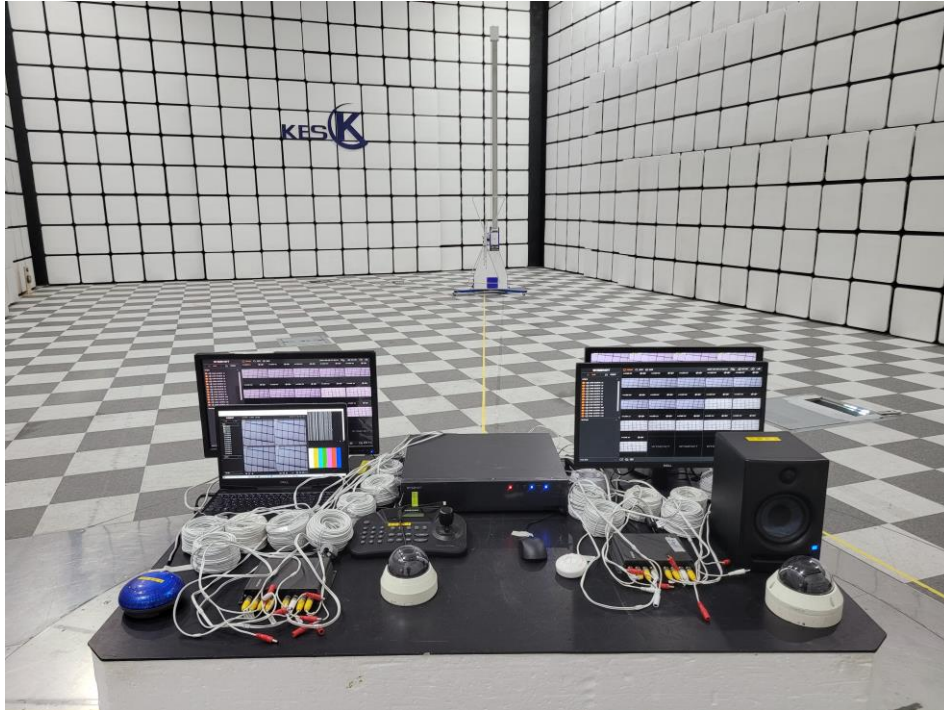

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

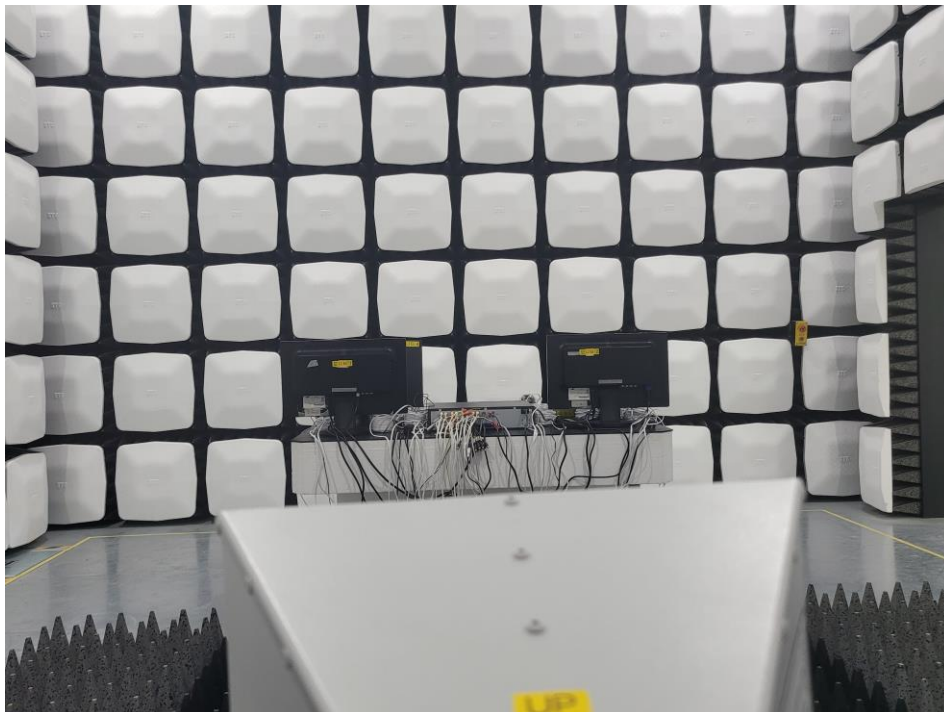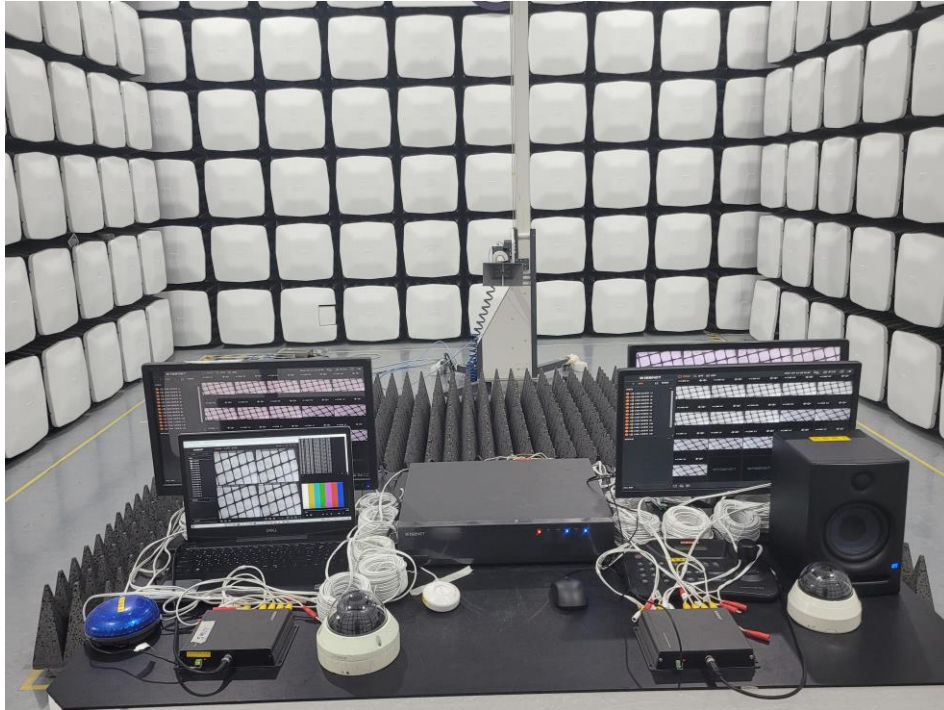

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)

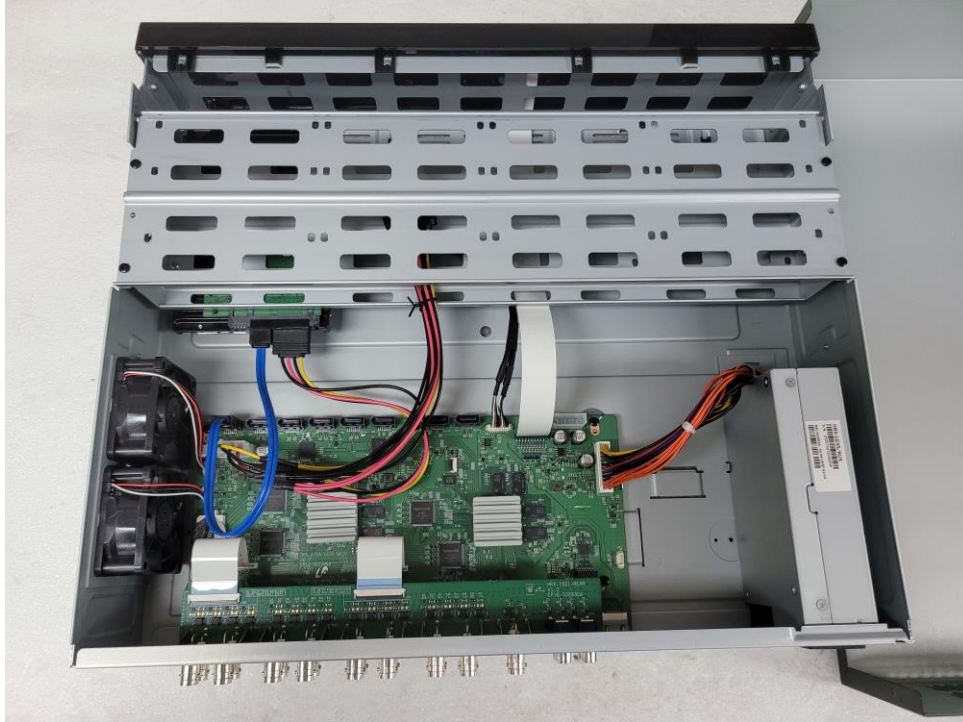


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board

(Top)

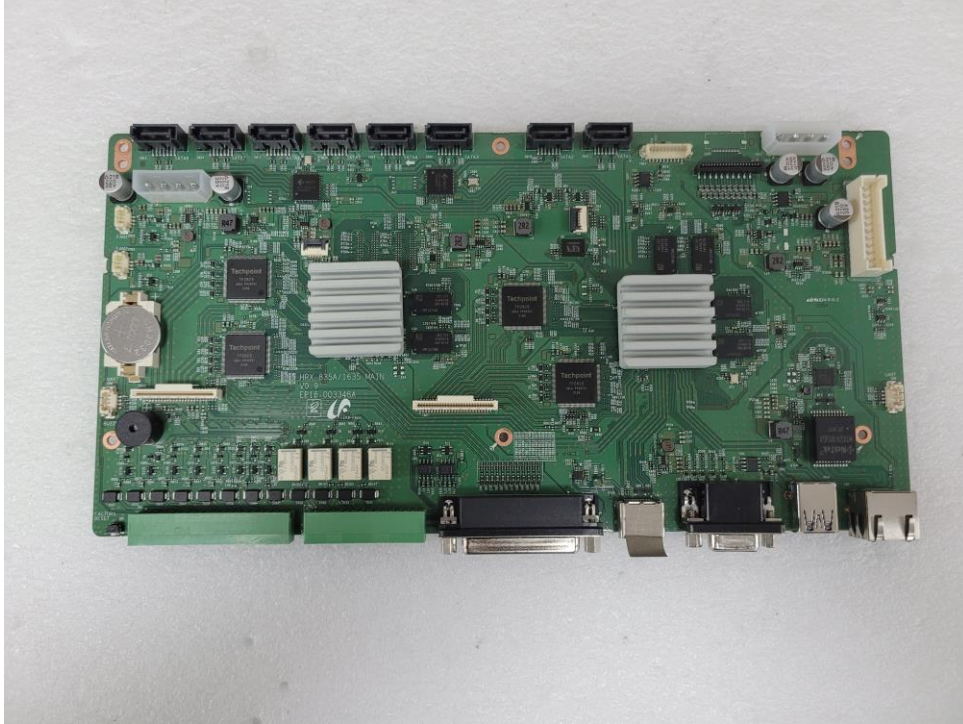

(Bottom)

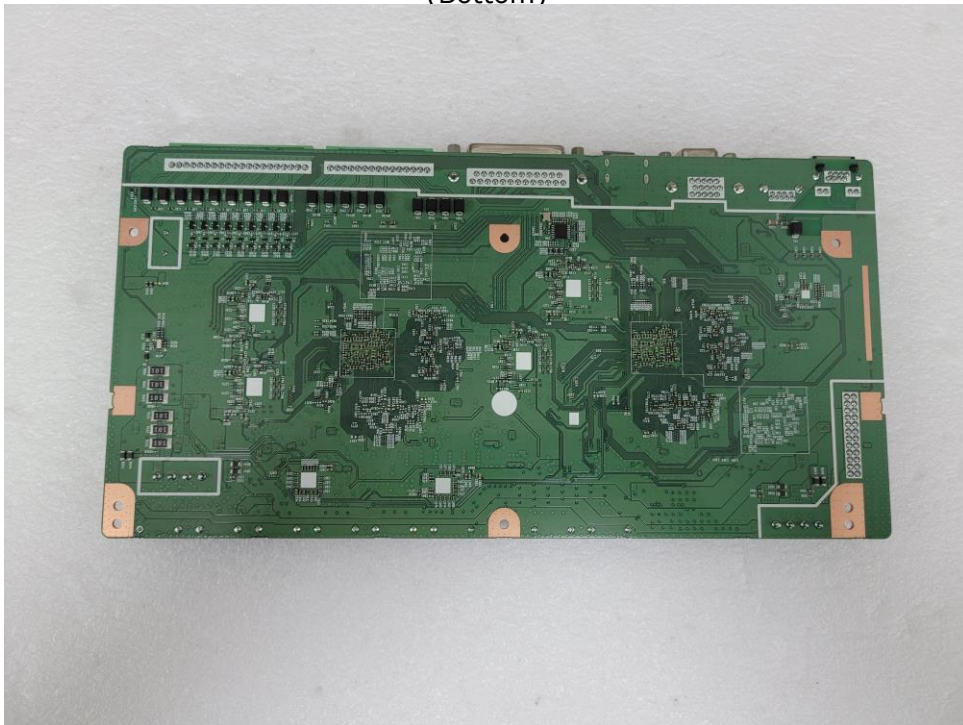

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – LED Board


(Top)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – USB Port Board

(Top)

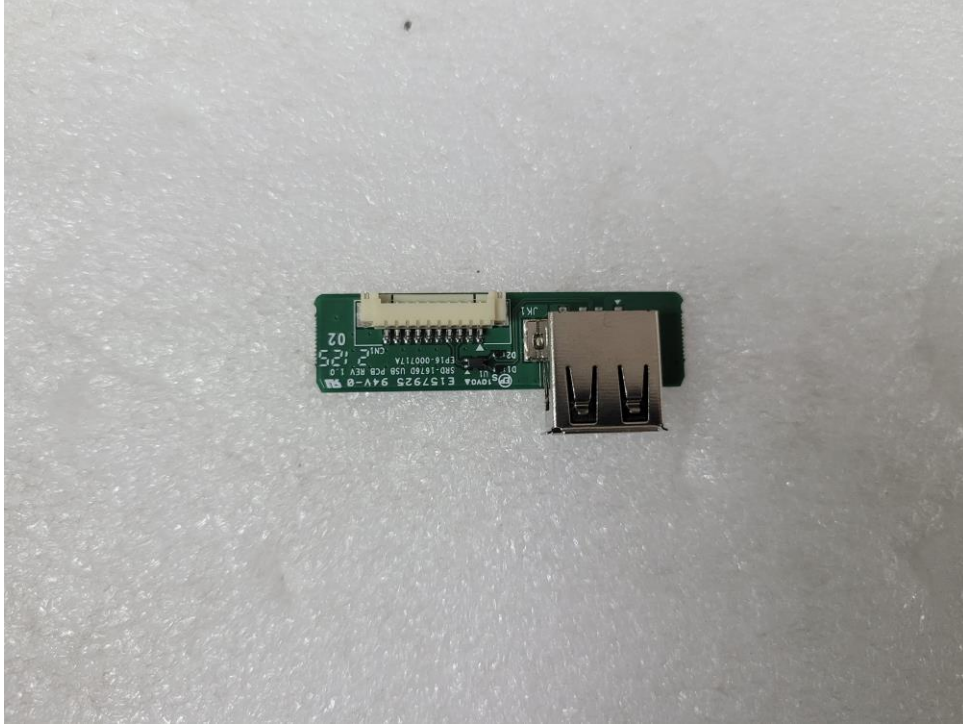


(Bottom)

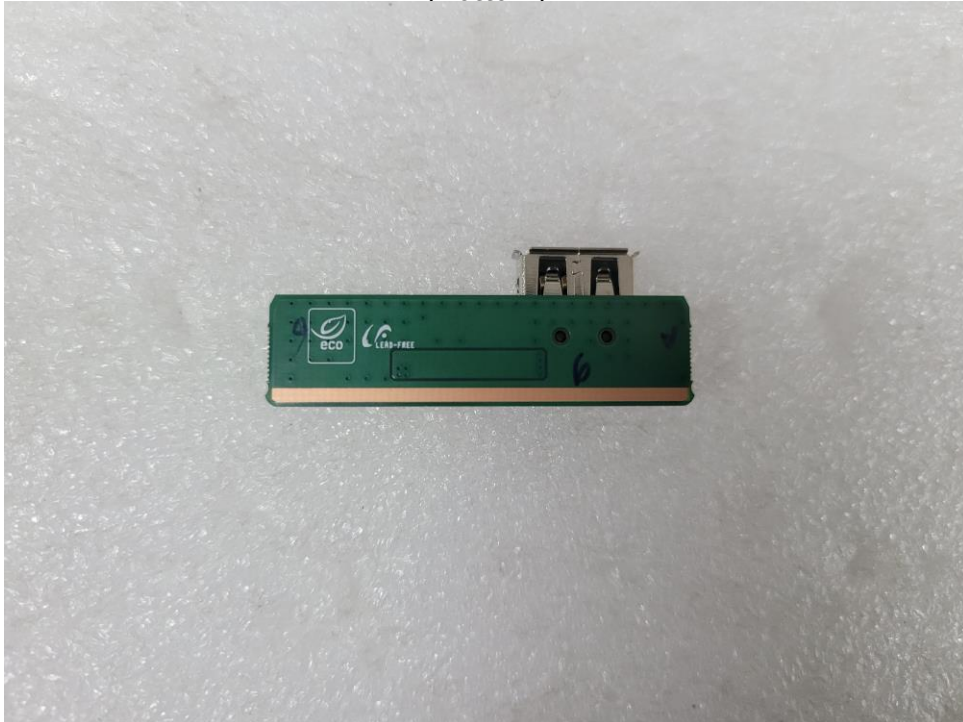

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Port Board

(Top)

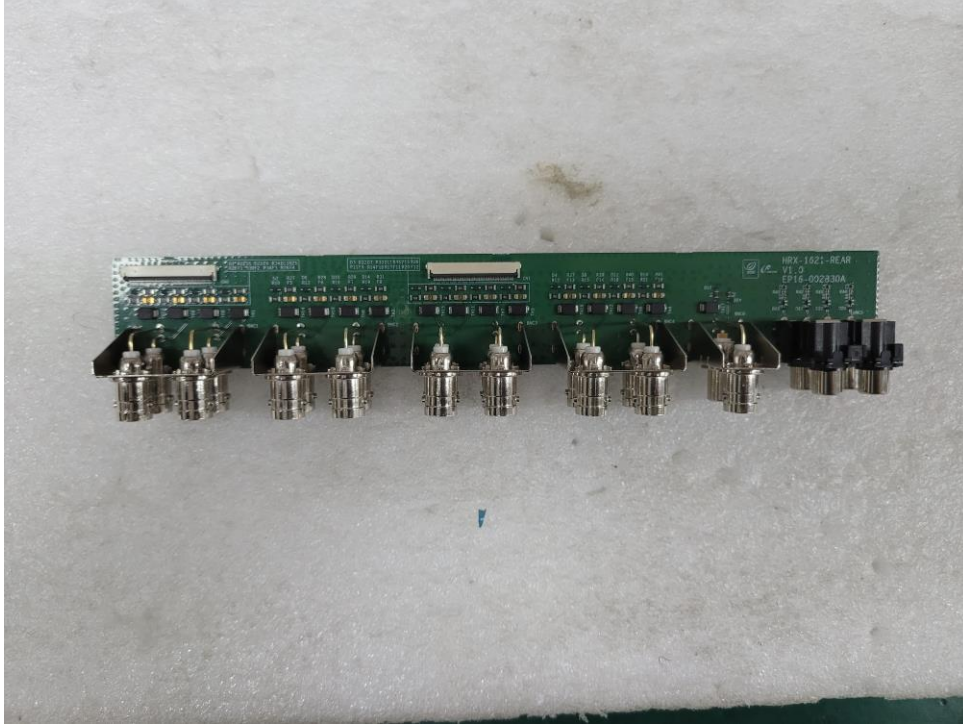


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs

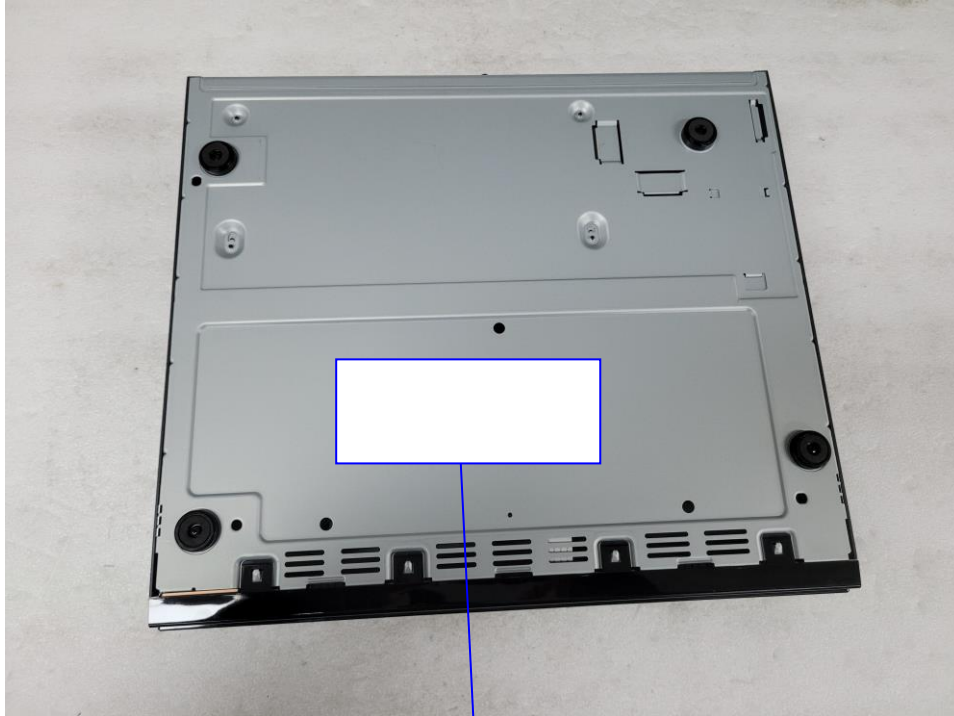

CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.