

EMC TEST REPORT

Test Report No. : KES-EM-23T0027-R2
Date of Issue : Feb. 24, 2023
Product name : WALL SPEAKER
Model/Type No. : SPA-W100W
Variant Model : SPA-W100B
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : Inter-M Corporation
Manufacturer Address : 7-18, Gwonyul-ro 1253beon-gil, Baekseok-eup, Yangju-si,
Gyeonggi-do
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Dec. 26, 2022
Test date : Jan. 03, 2023 ~ Jan. 04, 2023
Test Results : **In Compliance** **Not in Compliance**

Tested by

Eun Gu, Jeon
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0027-R2
Page (2) of (31)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 05, 2023	KES-EM-23T0027	Issued
Jan. 27, 2023	KES-EM-23T0027-R2	Change Manufacturer
Feb. 24, 2023	KES-EM-23T0027-R2	Change the Applicant at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions at Mains Power Ports	10
2.2	Radiated Electric Field Emissions(Below 1 GHz)	12
2.3	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA.....		16
	Conducted Emissions at Mains Power Ports.....	16
	Radiated Electric Field Emissions(Below 1 GHz)	18
	Radiated Electric Field Emissions(Above 1 GHz)	20
	Test Setup Photos and Configuration	21
	Conducted Emissions at Mains Power Ports.....	21
	Radiated Electric Field Emissions(Below 1 GHz)	22
	Radiated Electric Field Emissions(Above 1 GHz)	23
	EUT External Photographs.....	24
	EUT Internal Photographs	25



1.0 General Product Description

Main Specifications of EUT are:

Product	Type	Network Wall speaker
MIC Input	Input Sensitivity	-48dBV ± 3dB
	Frequency Response	20Hz ~ 20kHz ± 3dB
Line Output	Output Level	0 dBV ± 3dB
	Frequency Response	20Hz ~ 20kHz ± 3dB
	THD + N Ratio	less than 0.01%
	S/N Ratio (20Hz HPF, 20kHz LPF)	greater than 85dB
Power Amp	Output Power (8Ω, 1kHz Sine wave)	7W(PoE), 15W (PoE+)
	Frequency Response (1W, 8Ω)	20Hz ~ 20kHz ± 3dB
	S/N Ratio (20Hz HPF, 20kHz LPF)	greater than 85dB
Network	Ethernet	10/100 Base-T
Memory	Internal Memory	1 GBytes
	External Memory (Micro SD)	SDHC upto 32GB (SANDISK)
Contact	Contact Input	One channel
	Contact Output (Rating : 1A DC 30V, 0.3A AC 125V)	One channel
General	Operating Temperature	-20 ~ 50°C (-4°F ~ 122°F)
	Operating Humidity	10~100% RH Non-condensing
	IP code	IP45
	Weight	2.35Kg
	Size	170(W)*250(H)*134(D)
	Color	White
	Certificate	EMC - FCC part 15 Class A , ICES-003 Class A Safety - UL-60950 , Environment - IEC and NEMA based on the Product specs
Power	PoE	PoE (IEEE 802.3 af type 1 Class 3)
	PoE+	PoE+(IEEE 802.3 at type 2 Class 4)
Audio	Built-in microphone	50~16000 Hz
	Audio Compression	G.711 PCM 8 kHz G.726 ADPCM 8 kHz WAV, MP3 in mono/stereo from 64 kbps to 320 kbps. Sampling rate from 8 kHz up to 48 kHz. PCMU, PCMA, opus, L16/16000, L16/8000, speex/8000, speex/16000, G.726-32
Speaker	Speaker Component	5" LF Drive & 1" HF Drive, 2 way passive type
	Max. Sound Pressure Level (PoE : 7 Watt)	97dB
	Max. Sound Pressure Level (PoE+ : 15 Watt)	100dB
	Max. Power (Peak)	200W
	Frequency Response	87Hz~20kHz
	Sensitivity (1Watt)	89dB
Network	Security	Password protection : admin,setup,user,guest (sha-2, Digest authentication, User access log)
	Supported Protocols	IPv4, HTTP, SIP, Bonjour, DNS, NTP, TCP, UDP, DHCP, ARP, SSH, ICMP
System Integration	API (Application Programming Interface)	Including SUNAPI Integration with HTW WAVE (VMS)
	Multi-source Dynamic PA control	<Controller Mode> Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) Up to 50 Zone Control (Multicast) Up to 255 Groups <Speaker Mode> Up to 20 Zone Streaming (Unicast) Up to 50 Zone Streaming (Multicast) <Streaming Mode> Up to 256 Zone Streaming (Multicast)
	Voice Announcement	Up to 40 pre-recorded voice announcements
	VoIP	Tested with PBX suppliers such as Cisco and Asterisk. Supported SIP features: DTMF (RFC2976 and RFC2833) Supported codecs: PCMU, PCMA, speex/8000, speex/16000
	TTS	Domestic Version : Korean Export Version : English(US, UK), German, French, Spanish, Russian
	Intelligent Audio	Speaker Test (by built in test tool, bandwidth check also)
	Event Triggers	Virtual Inputs Call : DTMF, State changes
	Functional Monitoring	Connection verification, Built-in system logging
	Supported OS	Windows : Windows 10 MAC : Catalina 10.15.4 ↑ , Big Sur 11.1 ↑
	Supported Web viewer	Chrome Version : 91.0.4472.114 ↑

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

AC 120 V, 60 Hz

1.2 Variant Model Differences

Color Differences

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
WALL SPEAKER	SPA-W100W	-	Inter-M Corporation	EUT
AUDIO MODULE	SPA-D1000	-	Inter-M Corporation	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
NOTEBOOK	Latitude 5300	8C47BE45C060	DELL INC.	-
NOTEBOOK ADAPTER	HA65NM130	-	Chicony Power Technology (Suzhou)Co.,Ltd.	-
PoE INJECTOR	PT-PSE109GBRO-AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	-
BUTTON ALARM	-	-	-	-
ALARM	-	-	-	-
Micro SD Card	-	-	-	8 GB
Speaker	E5	-	PreSonus®	-

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
WALL SPEAKER (EUT)	RJ -45	PoE INJECTOR	RJ-45	3.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	ALARM IN	BUTTON ALARM	Line	3.0	U
	ALARM OUT	MULTIMETER	Line	3.0	U
	Groud	Groud	Groud	1.8	U
	LINE OUT (3 Pin)	Speaker	XLR	1.0	U

* Unshielded = U, Shielded = S


1.7 EUT Operating Mode(s)

Test mode	operating
Operation	<ol style="list-style-type: none"> 1. Ping Test Mode. 2. After accessing the web browser, the operation status was checked by playing the 1KHz Tone. 3. Test by uploading the sound source stored on the Micro SD Card through the web viewer 4. Tested while connecting to a web viewer and checking the operation status at the ALARM IN/OUT port.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-

1.8 Configuration

■ AC Main
□ DC Main

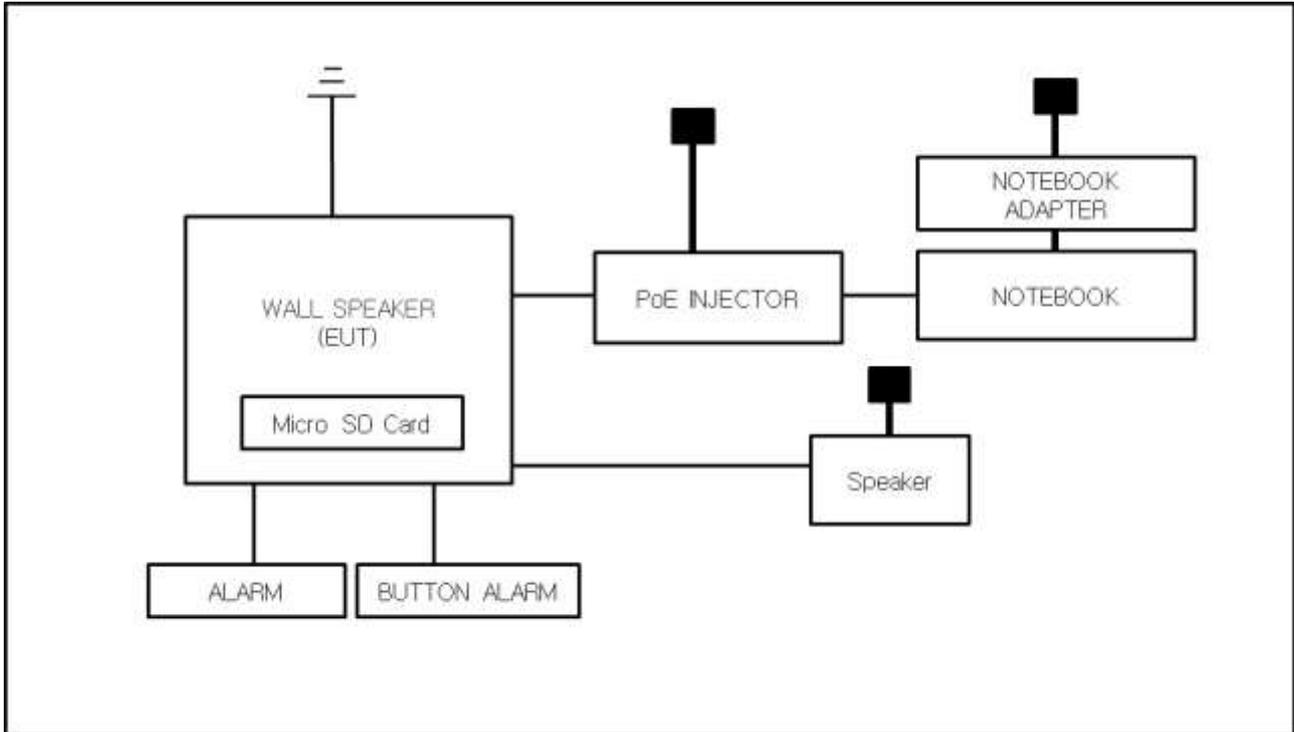

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.0 Test Regulations

The emissions tests were performed according to following regulations:

47 CFR Part 15, Subpart B

CISPR 22:2009 +A1:2010 Class A Class B

ANSI C63.4a-2017 Class A Class B

IC Regulation ICES-003 Issue 7

CAN/CSA-CISPR 32:17 Class A Class B

ANSI C63.4a-2017 Class A Class B

2.1 Conducted Emissions at Mains Power Ports

Test Date

Jan. 04, 2023


Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	11, 10, 2023
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Diagram of test setup

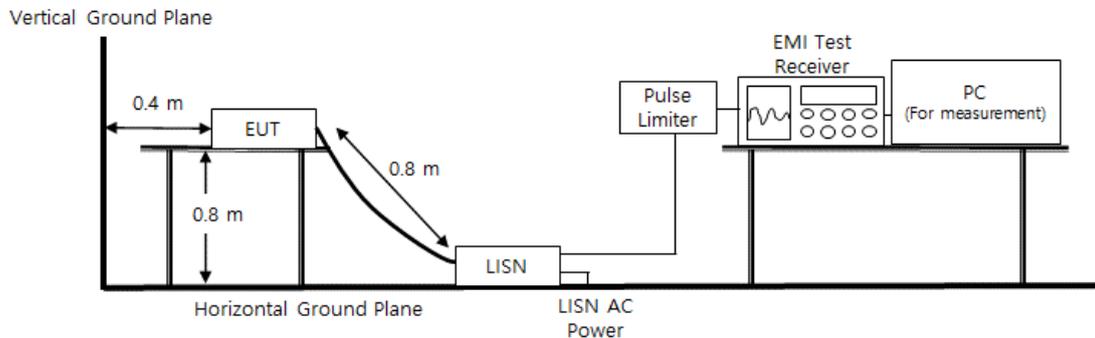

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0027-R2
Page (11) of (31)

Test Conditions

Temperature: (22,7 ± 0,1) °C
Relative Humidity: (45,4 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 03, 2023


Test Location

OPEN AREA TEST SITE #2 SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Diagram of test setup

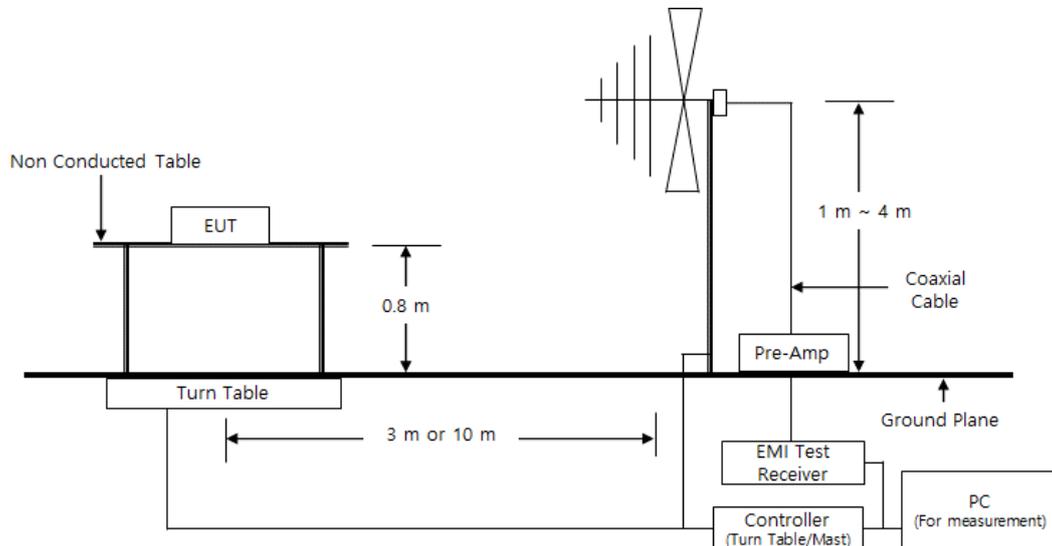

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0027-R2
Page (13) of (31)

Test Conditions

Temperature: $(22,8 \pm 0,2) ^\circ\text{C}$
Relative Humidity: $(45,1 \pm 0,1) \% \text{ R.H.}$

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 03, 2023


Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 28, 2023
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
<input checked="" type="checkbox"/>	ATTENUATOR	8491B	HP	23094	04, 21, 2023

Diagram of test setup

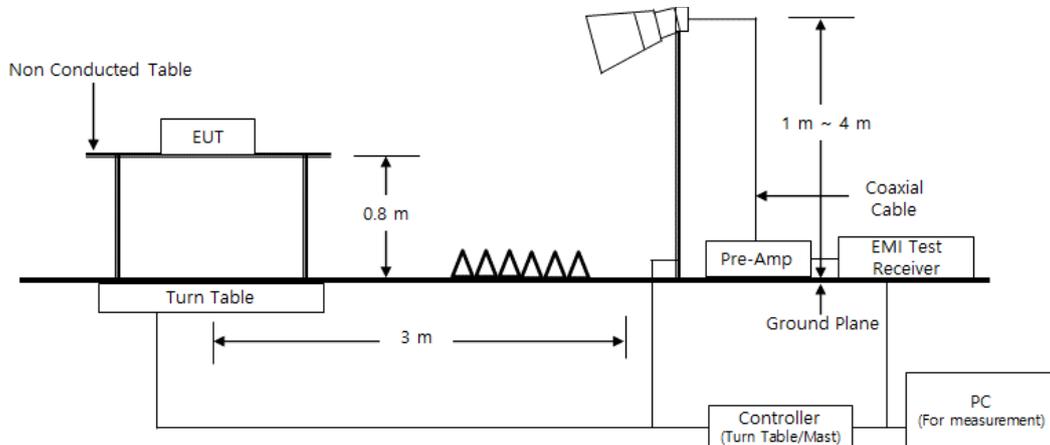

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0027-R2
Page (15) of (31)

Test Conditions

Temperature: (23,5 ± 0,1) °C
Relative Humidity: (44,2 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SPA-W100W
Phase:	L1
Mode:	
Operator Name:	KES

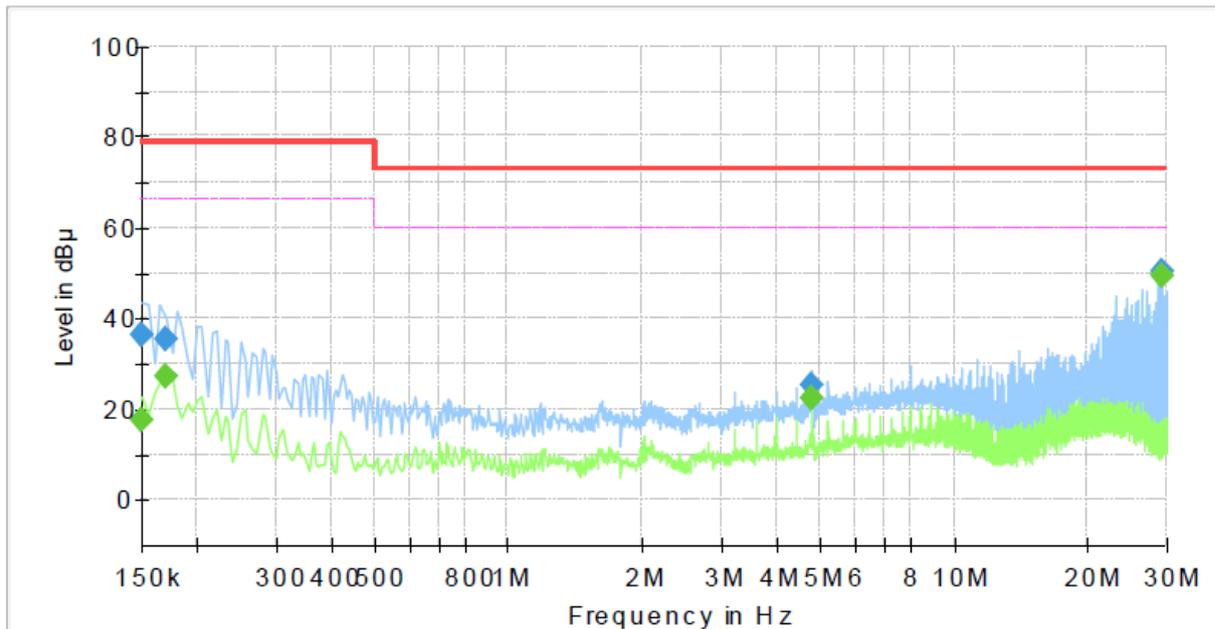

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	17.69	66.00	48.31	1000.0	9.000	L1	19.5
0.150000	36.55	---	79.00	42.45	1000.0	9.000	L1	19.5
0.170000	---	27.26	66.00	38.74	1000.0	9.000	L1	19.5
0.170000	35.40	---	79.00	43.60	1000.0	9.000	L1	19.5
4.810000	---	22.50	60.00	37.50	1000.0	9.000	L1	19.7
4.810000	24.99	---	73.00	48.01	1000.0	9.000	L1	19.7
29.235000	---	49.55	60.00	10.45	1000.0	9.000	L1	20.4
29.235000	50.53	---	73.00	22.47	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
 Model No.: SPA-W100W
 Phase: N
 Mode:
 Operator Name: KES

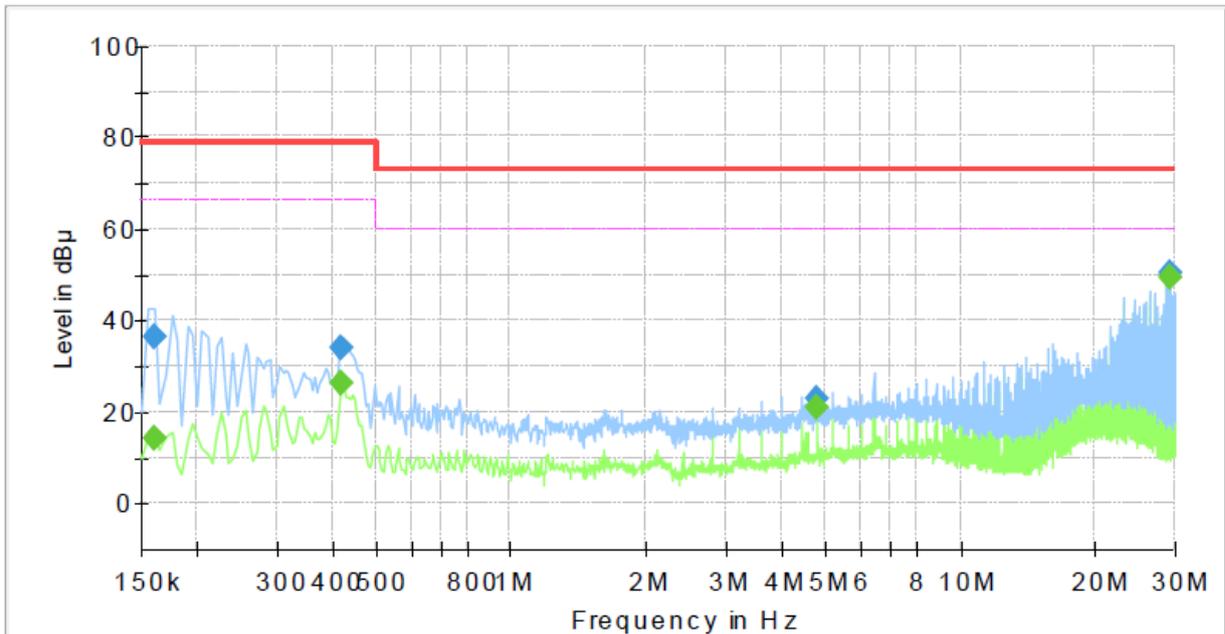

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	14.26	66.00	51.74	1000.0	9.000	N	19.4
0.160000	36.17	---	79.00	42.83	1000.0	9.000	N	19.4
0.420000	---	26.36	66.00	39.64	1000.0	9.000	N	19.7
0.420000	33.72	---	79.00	45.28	1000.0	9.000	N	19.7
4.810000	---	20.73	60.00	39.27	1000.0	9.000	N	19.7
4.810000	22.88	---	73.00	50.12	1000.0	9.000	N	19.7
29.235000	---	49.53	60.00	10.47	1000.0	9.000	N	20.4
29.235000	50.50	---	73.00	22.50	1000.0	9.000	N	20.4


◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]
 QuasiPeak / CAverage : The Final Value
 Reading Value : Not shown in the table.
 Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

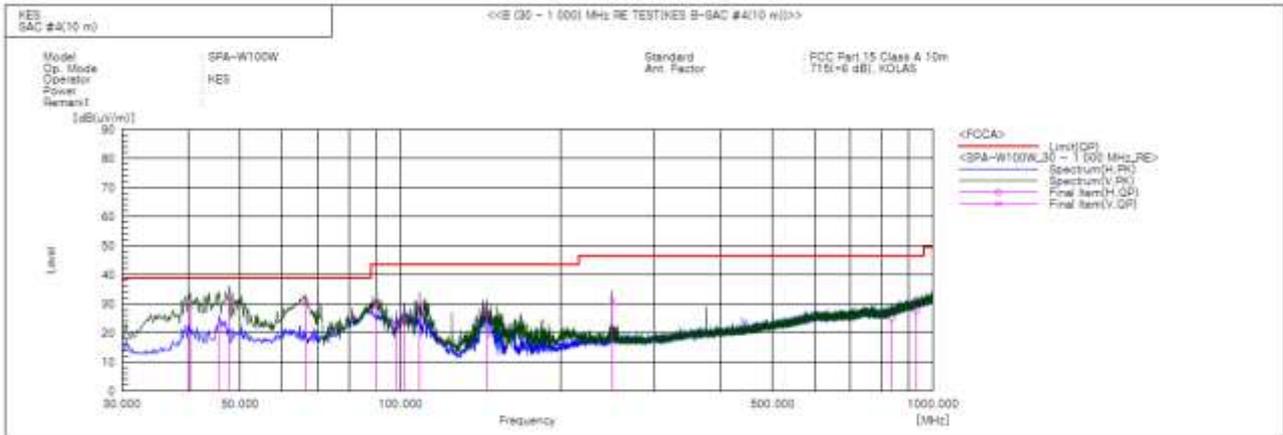


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	40.306	V	51.5	-22.1	29.4	39.0	9.6	149.0	141.0	
2	45.641	H	41.9	-20.8	21.1	39.0	17.9	382.0	166.0	
3	47.731	V	52.5	-20.6	31.9	39.0	7.1	145.0	302.0	
4	66.254	V	53.4	-23.2	30.2	39.0	8.8	106.0	78.0	
5	90.261	V	53.8	-23.7	30.1	43.5	13.4	122.0	235.0	
6	98.385	H	45.5	-22.1	23.4	43.5	20.1	398.0	279.0	
7	101.901	H	47.6	-22.0	25.6	43.5	17.9	377.0	301.0	
8	108.691	V	51.9	-22.4	29.5	43.5	14.0	126.0	48.0	
9	145.188	H	52.0	-25.0	27.0	43.5	16.5	347.0	27.0	
10	249.948	V	49.8	-18.8	31.0	46.5	15.5	100.0	14.0	
11	838.131	H	30.7	-5.8	24.9	46.5	21.6	393.0	166.0	
12	930.403	H	31.1	-3.4	27.7	46.5	18.8	349.0	118.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- IC Regulation ICES-003 Issue 7

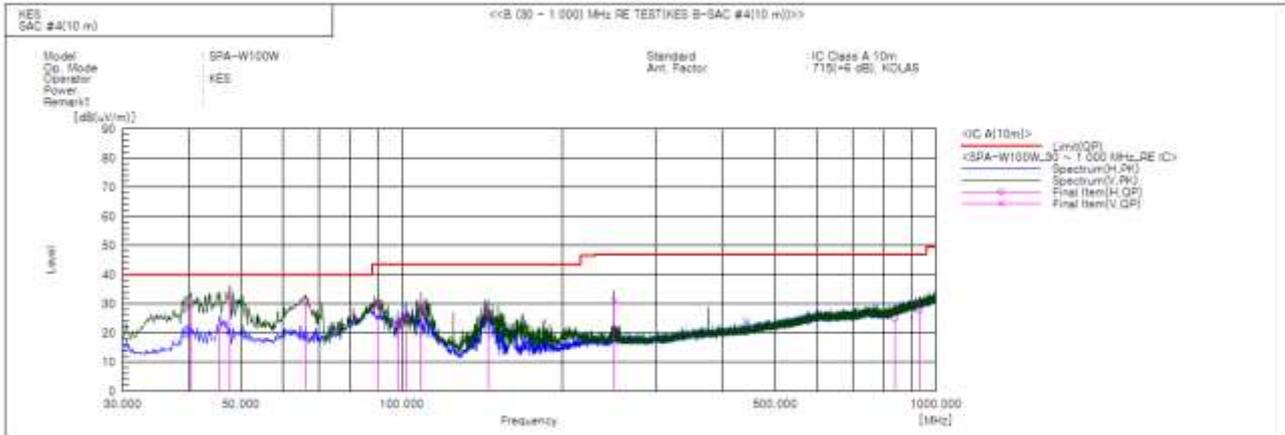

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	40.306	V	51.5	-22.1	29.4	40.0	10.6	149.0	141.0	
2	45.641	H	41.9	-20.8	21.1	40.0	18.9	382.0	166.0	
3	47.731	V	52.5	-20.6	31.9	40.0	8.1	145.0	302.0	
4	66.254	V	53.4	-23.2	30.2	40.0	9.8	106.0	78.0	
5	90.261	V	53.8	-23.7	30.1	43.5	13.4	122.0	235.0	
6	98.385	H	45.5	-22.1	23.4	43.5	20.1	398.0	279.0	
7	101.901	H	47.6	-22.0	25.6	43.5	17.9	377.0	301.0	
8	108.691	V	51.9	-22.4	29.5	43.5	14.0	126.0	48.0	
9	145.188	H	52.0	-25.0	27.0	43.5	16.5	347.0	27.0	
10	249.948	V	49.8	-18.8	31.0	47.0	16.0	100.0	14.0	
11	838.131	H	30.7	-5.8	24.9	47.0	22.1	393.0	166.0	
12	930.403	H	31.1	-3.4	27.7	47.0	19.3	349.0	118.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])


Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Radiated Electric Field Emissions(Above 1 GHz)

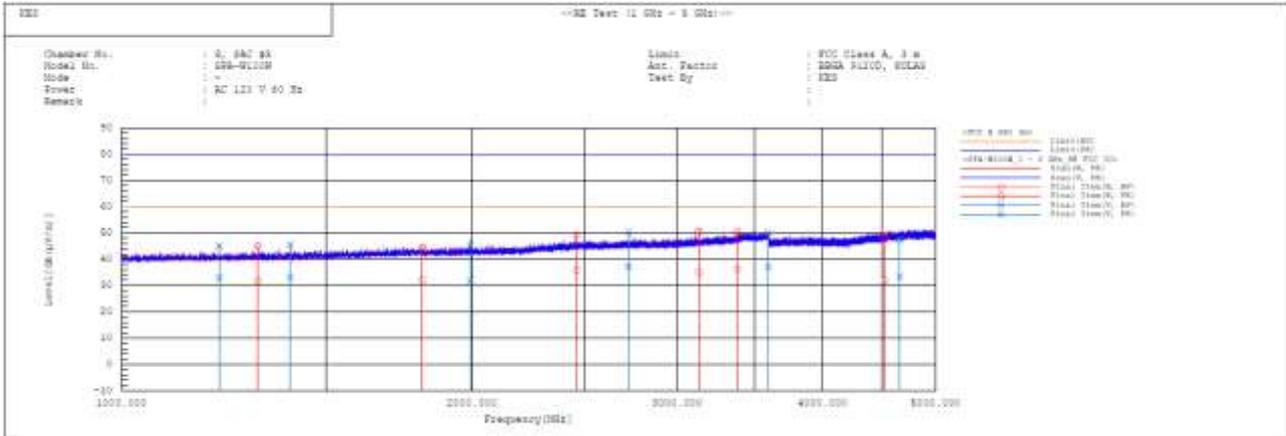

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PE [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PE [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PE [dB(μV/m)]	Margin AV [dB]	Margin PE [dB]	Height [cm]	Angle [deg]	Remark
1	1213.422	V	34.3	46.5	-1.4	32.9	45.1	60.0	60.0	27.1	34.9	117.0	37.1	
2	1210.545	H	32.8	45.9	-0.9	31.9	45.0	60.0	60.0	28.1	35.0	351.0	154.7	
3	1397.154	V	33.7	46.1	-0.5	33.2	45.6	60.0	60.0	26.8	34.4	133.0	0.9	
4	1813.654	H	30.8	43.1	1.3	32.1	44.4	60.0	60.0	27.9	35.6	331.0	350.8	
5	1594.325	V	30.0	43.0	1.5	31.5	44.5	60.0	60.0	28.5	35.5	155.0	42.7	
6	2460.435	M	32.5	45.8	3.4	35.9	49.2	60.0	60.0	24.1	30.7	329.0	212.0	
7	2725.493	V	32.9	45.9	4.3	37.2	50.2	60.0	60.0	22.8	29.8	102.0	42.7	
8	3135.192	H	29.9	45.4	5.2	35.0	50.6	60.0	60.0	25.0	29.4	597.0	358.8	
9	3380.333	H	30.7	44.5	5.5	36.2	50.4	60.0	60.0	23.8	29.6	374.0	256.4	
10	3533.153	V	31.0	43.8	6.0	37.0	49.5	60.0	60.0	23.0	30.1	124.0	277.1	
11	4523.239	M	23.2	39.9	9.9	33.1	47.9	60.0	60.0	27.9	32.3	349.0	298.7	
12	4661.053	V	24.0	39.1	9.4	33.4	47.5	60.0	60.0	26.6	32.5	142.0	243.9	

◆ Calculation

$$\text{Result(PK/CAV)} [\text{dB}(\mu\text{V}/\text{m})] = (\text{Reading(PK/CAV)}[\text{dB}(\mu\text{V})] + \text{c.f}[\text{dB}(1/\text{m})])$$

$$\text{Margin(PK/CAV)}[\text{dB}] = \text{Limit}[\text{dB}(\mu\text{V}/\text{m})] - \text{Result(PK/CAV)} [\text{dB}(\mu\text{V}/\text{m})]$$

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

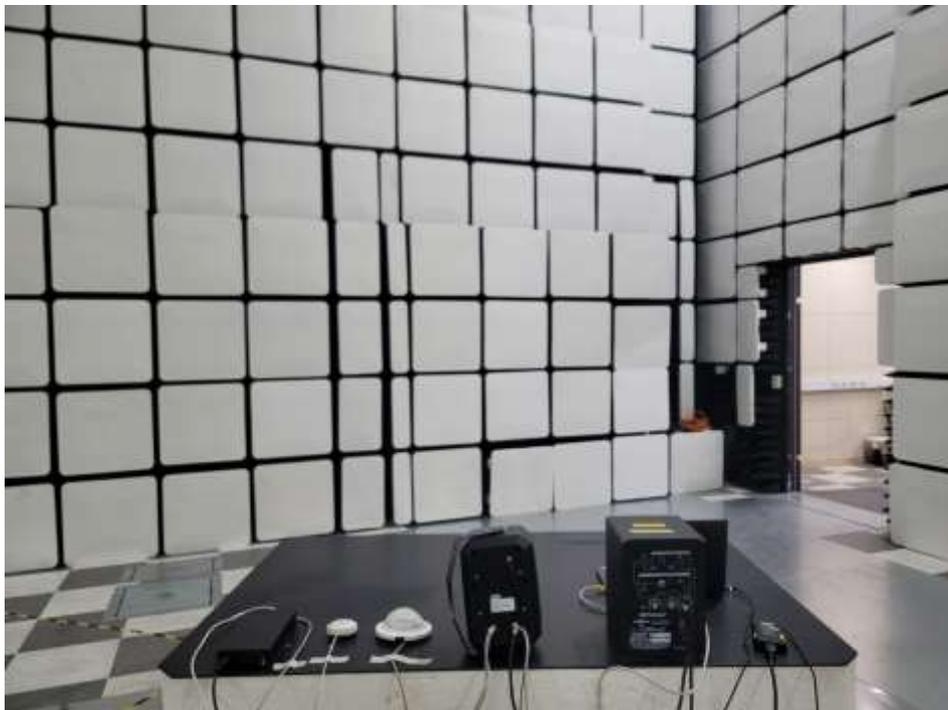

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

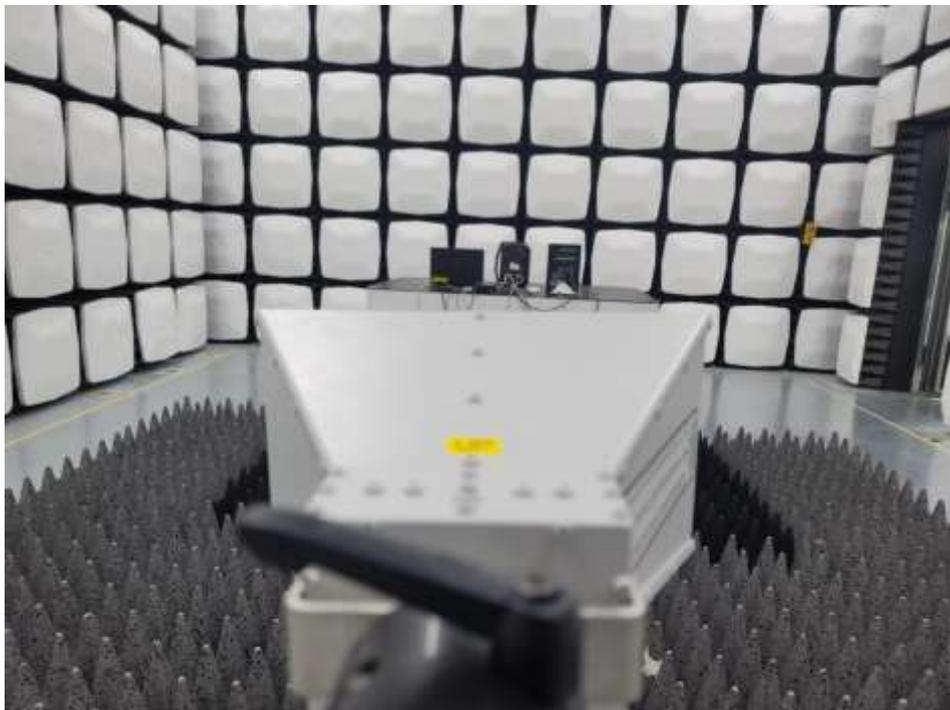

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs

(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 1

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Speaker 1

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Speaker 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

FCC Label



Hanwha Vision Co., Ltd

SPA-W100W

IC Label

CAN ICES-003(A) / NMB-003(A)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.