

TEST REPORT

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (1) / (24) pages

1. Applicant

- Name : Hanwha Vision Co., Ltd
- Address : 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488 KOREA
- Date of Receipt : Jan. 20, 2024

2. Manufacturer

- Name : Hanwha Vision Co., Ltd

3. Use of Report :

For submission to customer

4. Test sample / Model :

NETWORK CAMERA / XNV-A8084R

5. Date(s) of test :

Feb. 04, 2025 ~ Feb. 20, 2025

6. Test Standard (Method) used :

NEMA TS 2-2013 2.2.7.2 Test B ~ 2.2.7.8, NEMA TS 2.2.8,
NEMA TS 2.2.9

7. Testing Environment :

Temperature: (25 ±10) °C, Humidity: (50 ±25) % R.H.
Pressure: (96 ±10) kPa



8. Test Results :

Refer to the test results

9. Location of Test :

☒ Permanent Testing Lab ☐ On Site Testing
(5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Name: KyuNam Park  (Signature)	Name: HoHyun Lee  (Signature)

Remark. This report is not related to KOLAS accreditation and relevant regulation.

Feb. 26, 2025

CTK Co., Ltd.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (2) / (24) pages

Table of Contents

1. Testing laboratory	3
1.1 Testing laboratory information	3
1.2 Testing laboratory accreditation status	3
2. Product description and equipment information	4
2.1 Product description	4
2.2 Equipment information	4
2.3 Pre-test product images	5
2.4 Testing equipment images	6
3. Transient Test (NEMA TS 2-2013 2.2.7.2 Test B ~ 2.2.7.8)	7
3.1 Test date and environmental conditions	7
3.2 Test conditions and methods	7
3.3 Testing images	8
3.4 Test Result	9
3.5 Test Data	10
4. Resonant search, Endurance Test [NEMA TS 2-2013 2.2.8]	11
4.1 Test date and environmental conditions	11
4.2 Test conditions and methods	11
4.3 Testing images	13
4.4 Test Result	14
4.5 Test Data	15
5. Shock(impact) Test [NEMA TS 2-2013 2.2.9]	18
5.1 Test date and environmental conditions	18
5.2 Test conditions and methods	18
5.3 Testing images	19
5.4 Test Result	20
5.5 Test Data	21
5.6 Post-test product images	24

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (3) / (24) pages

1. Testing laboratory

1.1 Testing laboratory information

Lab. Name	CTK Co., Ltd.
Representative	Young Joseph Seungwon
Address	113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do Republic of Korea
Tel.	+82-31-339-9970
Fax.	+82-31-624-9501
E-Mail	all.youngin@element.com
Website	www.elementkorea.kr

1.2 Testing laboratory accreditation status

Country	Classification	Accreditation Number	Logo
International	KOLAS	TESTING NO. KT119	

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (4) / (24) pages

2. Product description and equipment information

2.1 Product description

Product Name	Model Name	Quantity	Comment
NETWORK CAMERA	XNV-A8084R	1 EA	–

2.2 Equipment information

Testing equipment	Model Name	Manufacturer	Manufacturing Number	Calibration Date
Temperature & Humidity Chamber	ARS-1100-AE	ESPEC	1110024017	Oct. 7, 2025
VIBRATION TESTING SYSTEM	LT1010	FAMTECH	D2012335	N/A
Acceleration sensor	8703A250M5	KISTLER	5830236	Jan. 16, 2026
Acceleration sensor	8703A250M5	KISTLER	5722241	Jan. 16, 2026



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (5) / (24) pages

2.3 Pre-test product images

2.3.1 Test sample



Top



Bottom



Front



Rear



Left side



Right side



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (6) / (24) pages

2.4 Testing equipment images

2.4.1 Test equipment



Temperature & Humidity Chamber



VIBRATION TESTING SYSTEM



8703A250M5



8703A250M5

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (7) / (24) pages

3. Transient Test (NEMA TS 2-2013 2.2.7.2 Test B ~ 2.2.7.8)

3.1 Test date and environmental conditions

3.1.1 Test date: Feb. 04, 2025 ~ Feb. 05, 2025

3.1.2 Measured Environmental Conditions


Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.8	45.1	89.9

3.2 Test conditions and methods

- 3.2.1 Sample state: Operating state
- 3.2.2 Application step: Step E – Step F
- 3.2.3 Applied voltage: Step E – Step F(135 Vac ~ 89 Vac)
- 3.2.4 Temperature / Humidity: 74 °C = 165 °F
- 3.2.5 Test Time(h): 15 h

3.2.6 Test Methods

- Evaluations Criteria :
 - Check for mechanical damage before and after testing
- Test methods
 - The sample is placed in the chamber.
 - NEMA TS 2-2013 [2.2.7.2 Test B: Transient Tests(Power Service)-13. C.] Apply power in step of application.
 - Perform the temperature/humidity test according to NEMA TS 2-2013 [2.2.7.2 Test B: Transient Tests (Power Service)-13. C.].

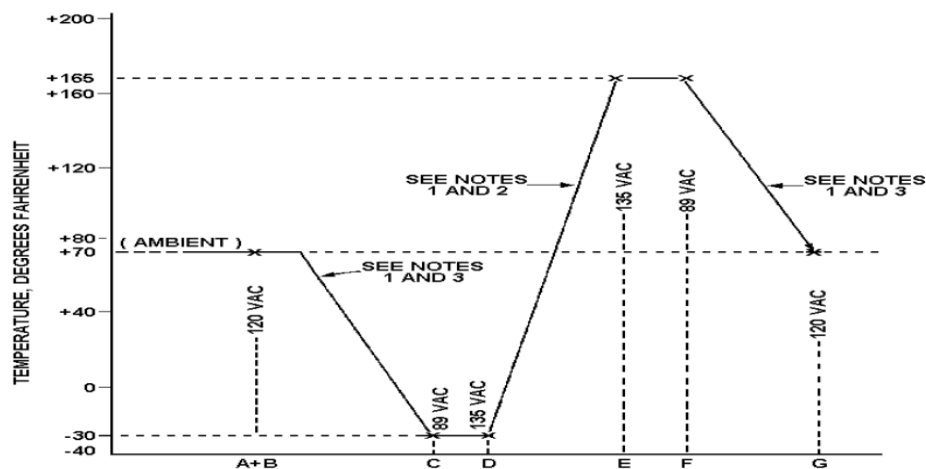

[NEMA TS 2-2013[2.2.7.2 Test B : Transient Tests(Power Service) 13. C.] Test profile]



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (8) / (24) pages

3.3 Testing images


3.3.1 Evidence of test setting (2.2.7.2 Transient Test)




Transient Tests




Transient Tests

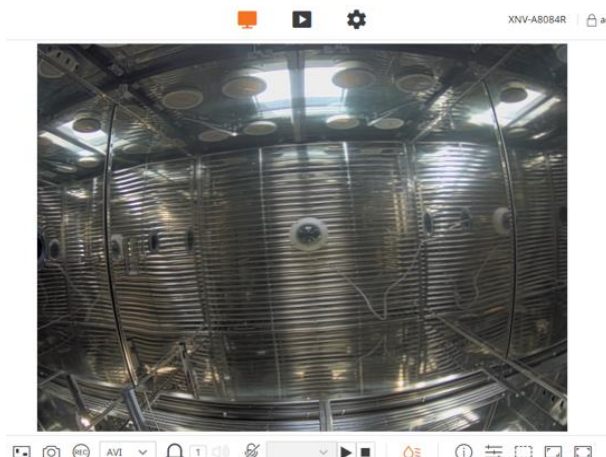

220V

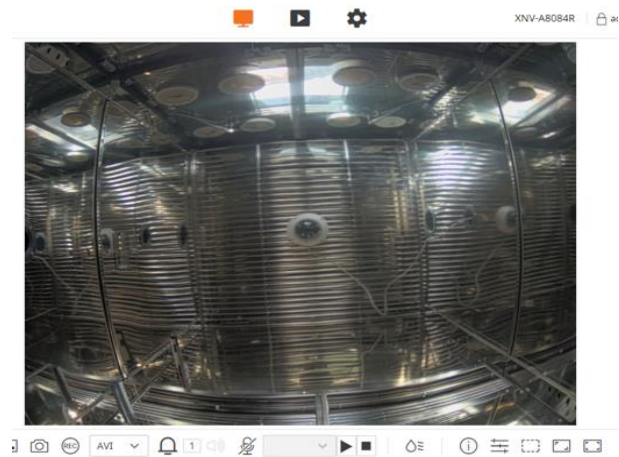

135V

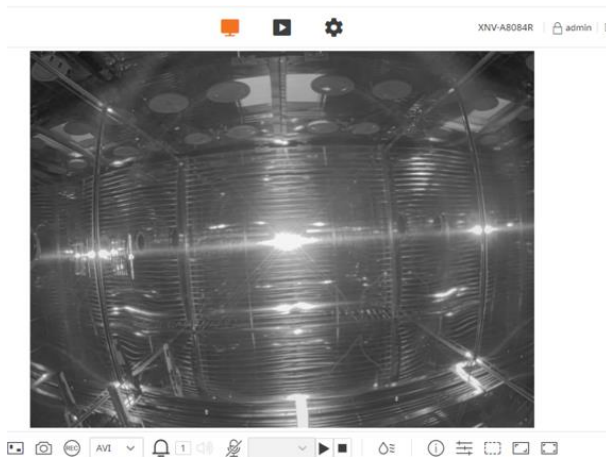

89V

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (9) / (24) pages

3.4 Test Result

3.4.1 Test result table

Evaluation Criteria		Test Results	Comment
Transient Tests	Before	Normal	
	After	Normal	




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (10) / (24) pages

3.5 Test Data

3.5.1 Power Service [NEMA TS 2-2013 2.2.7.2 Test B – 13. C]

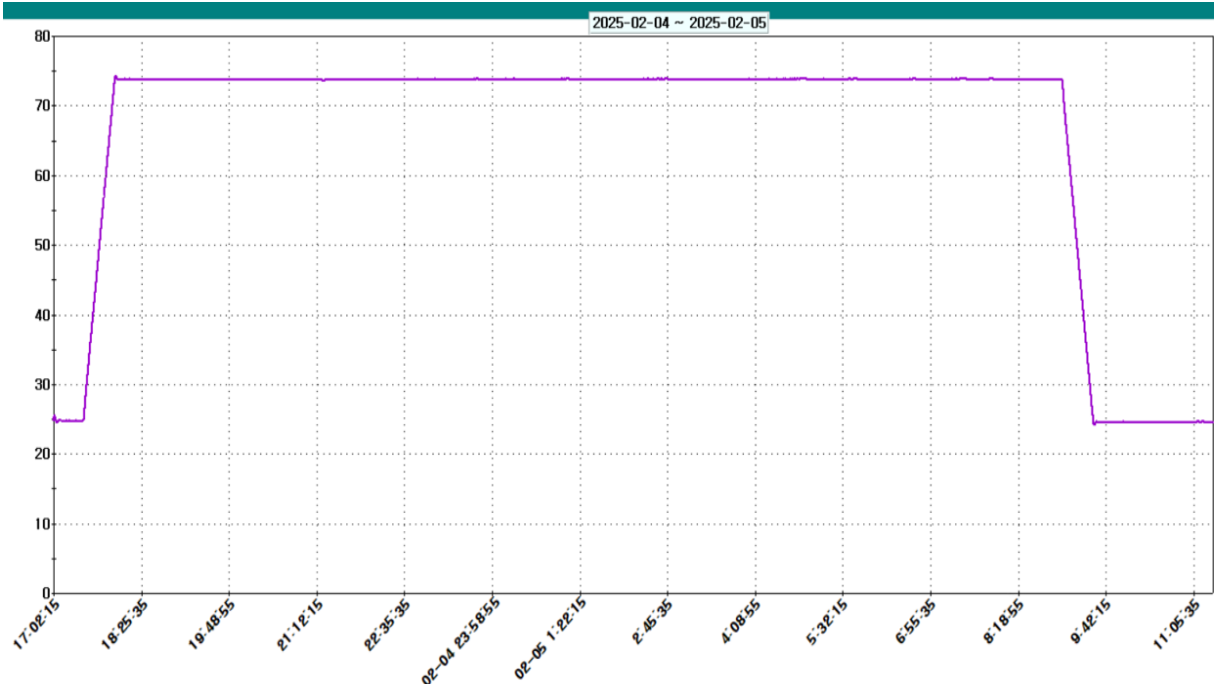

Temperature Data

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (11) / (24) pages

4. Resonant search, Endurance Test [NEMA TS 2-2013 2.2.8]

4.1 Test date and environmental conditions

4.1.1 Test date: Feb. 04, 2025 ~ Feb. 20, 2025

4.1.2 Measured Environmental Conditions

Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.8	45.1	89.9

4.2 Test conditions and methods

4.2.1 Resonant search [NEMA TS 2-2013 2.2.8.3]

- Sample status : unpackaged / not in operation
- Applied waveform : Sine
- Frequency(Hz) : 5 ~ 30
- Double amplitude displacement (inch) : 0.015
- Sweep rate(Sweep/min) : 12.5
- Applicable axis : X, Y, Z
- Test time(h) : 12.5
- Evaluation items
 - Check for mechanical damage before and after testing
- Test methods
 - With the test unit securely fastened to the test table, set the test table for a double amplitude displacement of 0.015 inch.
 - Cycle the test table over a search range from 5 to 30 Hz and back within a period of 12.5 minutes.
 - Conduct the resonant frequency search in each of the three mutually perpendicular planes.
 - Note and record the resonant frequency determined from each plane.
 - ◆ In the event of more than one resonant frequency in a given plane, record the most severe a. resonance.
 - ◆ b. If resonant frequencies appear equally severe, record each resonant frequency.
 - ◆ c. If no resonant frequency occurs for a given plane within the prescribed range, 30 Hz shall be recorded.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (12) / (24) pages

4.2.2 Endurance Test[NEMA TS 2-2013 2.2.8.4]

- Sample status : unpackaged / not in operation
- Applied waveform : Sine
- Frequency(Hz) : 30 or 3.2.2 Test results
- Acceleration(G) : 0.5
- Applicable axis : X, Y, Z
- Test time(h) : All 3(Each axis 1)
- Evaluation items
 - Check for mechanical damage before and after testing
- Test methods
 - Vibrate the test unit in each plane at its resonant frequency for a period of 1 hour at an amplitude resulting in 0.5 g acceleration. (test profile)
 - When more than one resonant frequency has been recorded in accordance with Section 1.2 Item 4, the test period of 1 hour shall be divided equally between the resonant frequencies.
 - The total time of the endurance test shall be limited to 3 hours, 1 hour in each of three mutually perpendicular planes.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (13) / (24) pages

4.3 Testing images


4.3.1 Evidence of test setting (NEMA TS 2-2013 2.2.8)

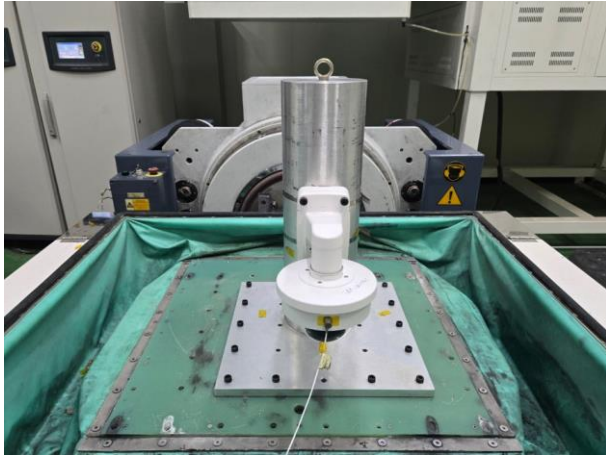


X axis_1

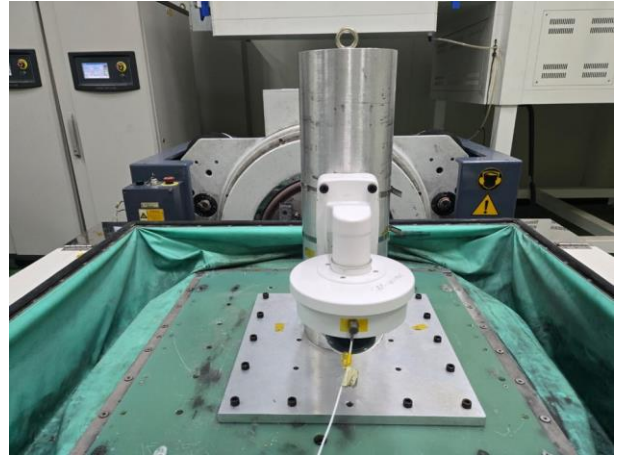

X axis_2

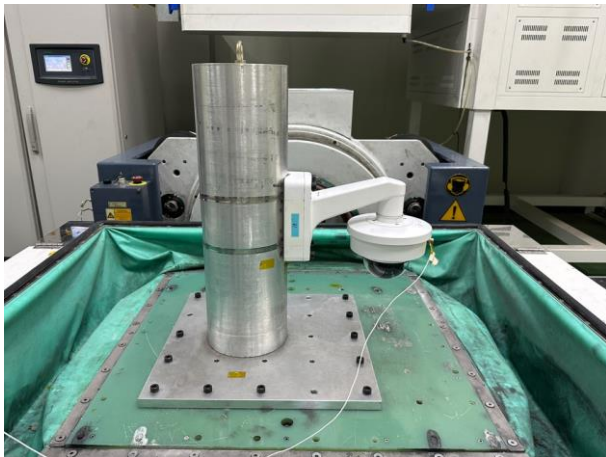


Y axis_1

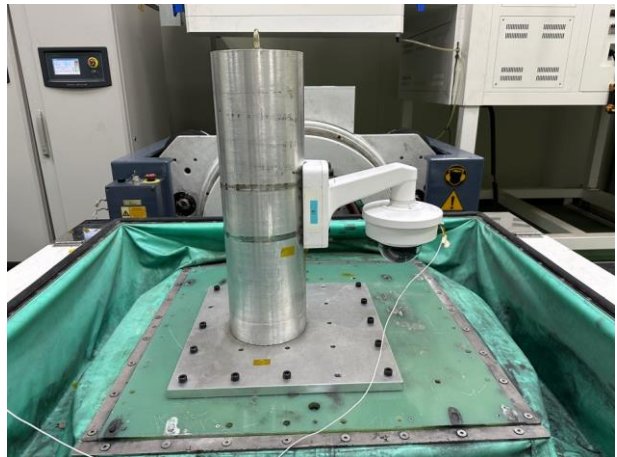

Y axis_2



Z axis_1

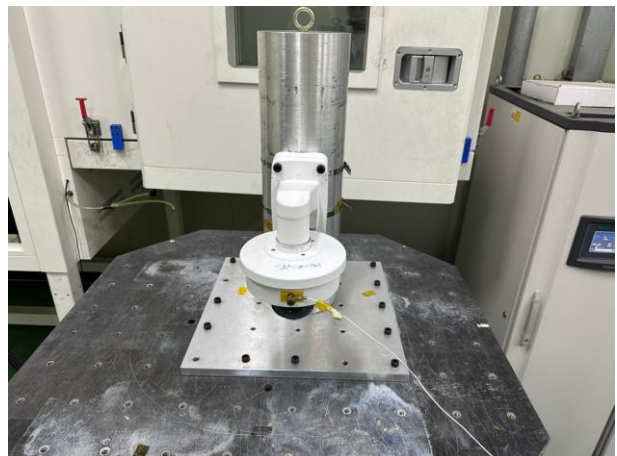

Z axis_2

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (14) / (24) pages

4.4 Test Result

4.4.1 Test result table

Evaluation Criteria		Test Results	Comment
Resonant search Test	Before	Normal	
	After	Normal	
Endurance Test	Before	Normal	
	After	Normal	




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (15) / (24) pages


4.5 Test Data

4.5.1 Test Data X Axis

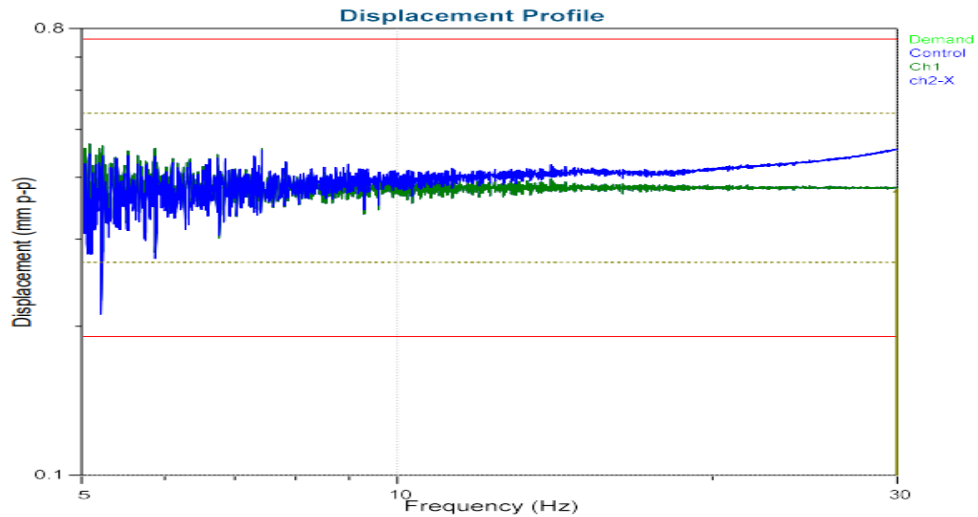

2 20, 2025 10:47:21 Level 1) 100 % Output: 0.0001336 Volts peak NEMA TS-2 2.2.8 - search
Demand: 0.381 mm Level Time: 0:12:31 Frequency: 30 Hz
Control: 0.0007124 mm Total Time: 0:12:31 End of Sweep Test

Resonant search Test (X Axis)

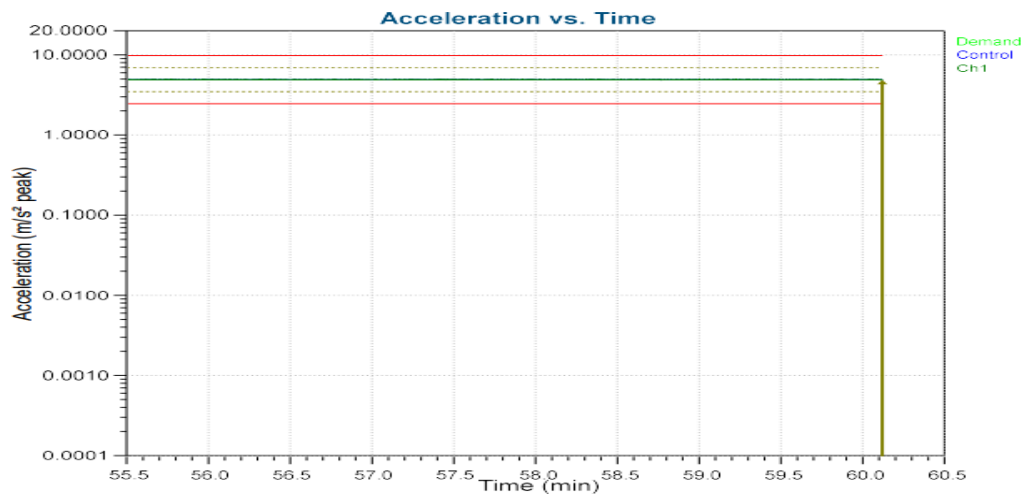

2 20, 2025 13:46:51 Level 1) 100 % Output: 0 Volts peak
Demand: 4.903 m/s Level Time: 1:00:01 Frequency: 30 Hz
Control: 0.02106 m/s Total Time: 1:00:01 End of Timed Test 2025-02-13 NEMA-TS2.2.8.3.

Endurance Test (X Axis)




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (16) / (24) pages

4.5.2 Test Data Y Axis

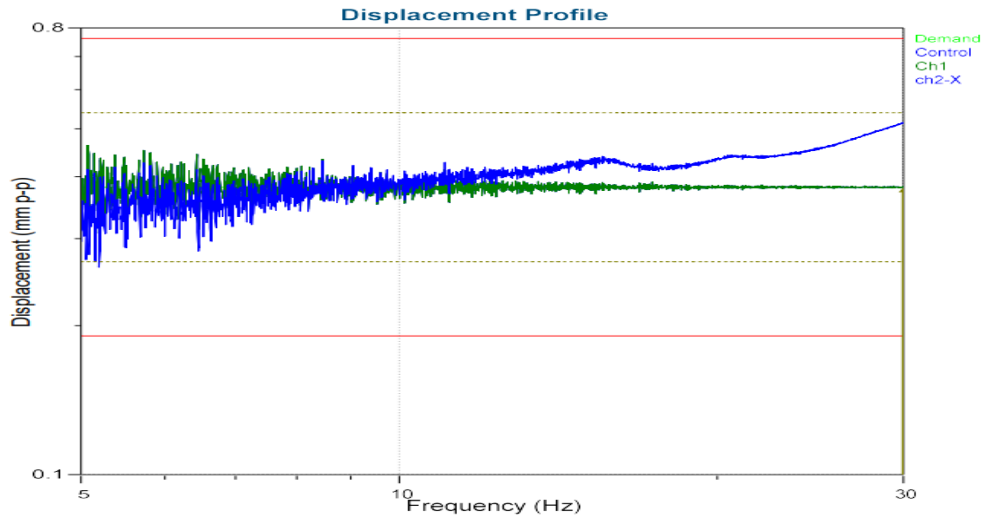

2 20, 2025 14:07:50 Level 1) 100 % Output: 0 Volts peak NEMA TS-2 2.2.8 - search
Demand: 0.381 mm Level Time: 0:12:31 Frequency: 30 Hz
Control: 0.0003816 mm Total Time: 0:12:31 End of Sweep Test

Resonant search Test (Y Axis)

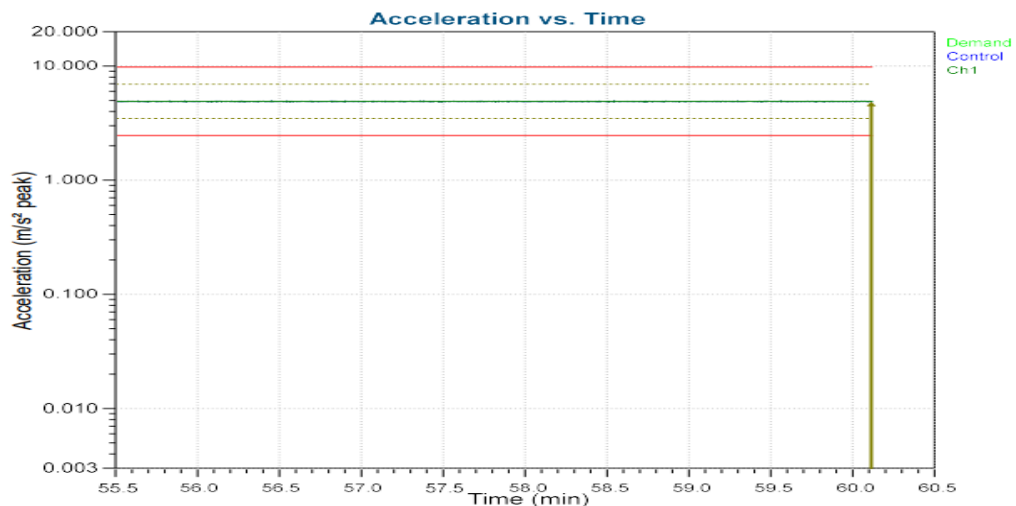

2 20, 2025 15:20:40 Level 1) 100 % Output: 0 Volts peak
Demand: 4.903 m/s Level Time: 1:00:01 Frequency: 30 Hz
Control: 0.002912 m/s Total Time: 1:00:01 End of Timed Test 2025-02-13 NEMA-TS2.2.8.3.

Endurance Test (Y Axis)




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (17) / (24) pages

4.5.3 Test Data Z Axis

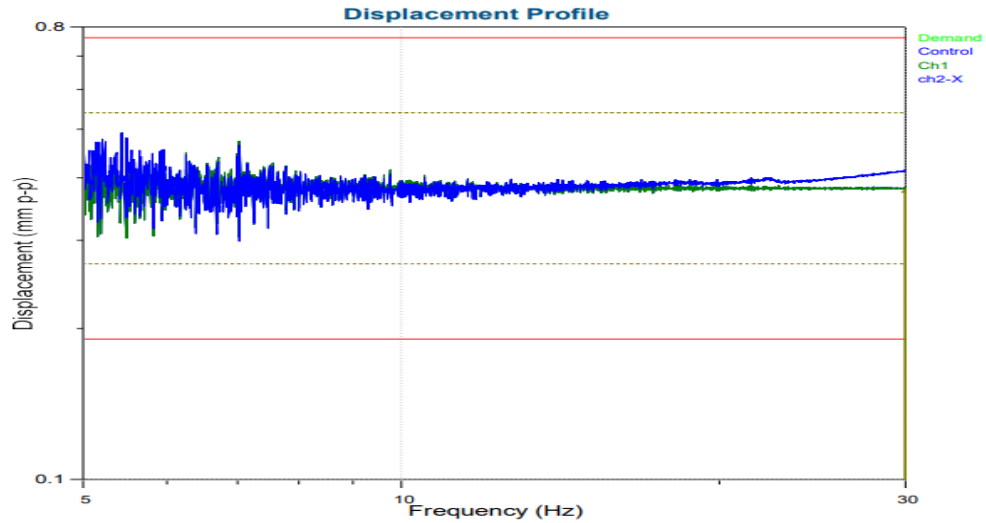

2 21, 2025 15:57:25 Level 1) 100 % Output: 0 Volts peak NEMA TS-2 2.2.8 - search
Demand: 0.381 mm Level Time: 0:12:36 Frequency: 30 Hz
Control: 0.0007353 mm Total Time: 0:12:37 End of Sweep Test

Resonant search Test (Y Axis)

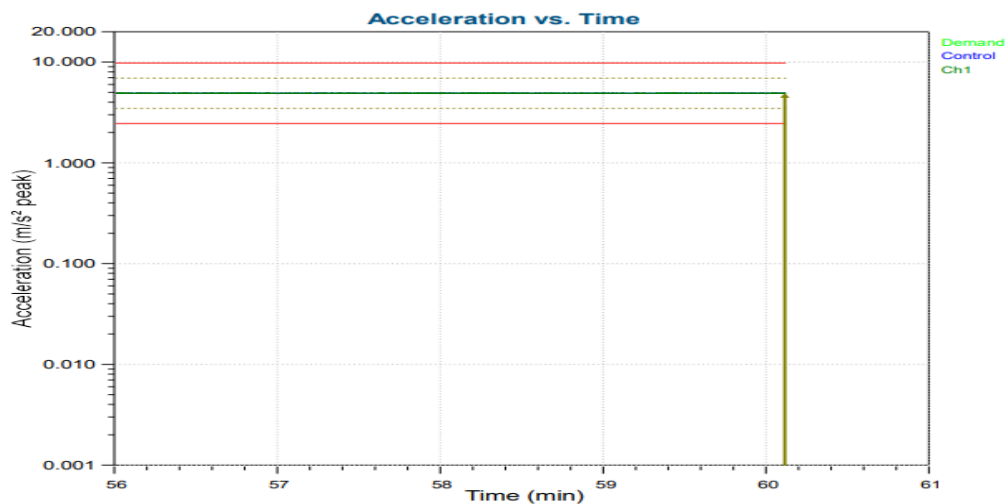

2 21, 2025 16:59:14 Level 1) 100 % Output: 0 Volts peak
Demand: 4.903 m/s Level Time: 1:00:00 Frequency: 30 Hz
Control: 0.01235 m/s Total Time: 1:00:07 End of Timed Test 2025-02-13 NEMA-TS2.2.8.3.

Endurance Test (X Axis)

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (18) / (24) pages

5. Shock(impact) Test [NEMA TS 2-2013 2.2.9]

5.1 Test date and environmental conditions

5.1.1 Test date: Feb. 20, 2025 ~ Feb. 20, 2025

5.1.2 Measured Environmental Conditions

Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.8	45.1	89.9

5.2 Test conditions and methods

5.2.1 Sample status: unpackaged / not in operation

5.2.2 Applied waveform: Half sine

5.2.3 Acceleration(G): 10 G

5.2.4 Nominal duration (ms): 11

5.2.5 Applicable axis : X, Y, Z

5.2.6 Number of impacts: 1 per direction (total 6)

5.2.7 Evaluation items: Check for mechanical damage before and after testing




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (19) / (24) pages

5.3 Testing images


5.3.1 Evidence of test setting (NEMA TS 2-2013 2.2.9)

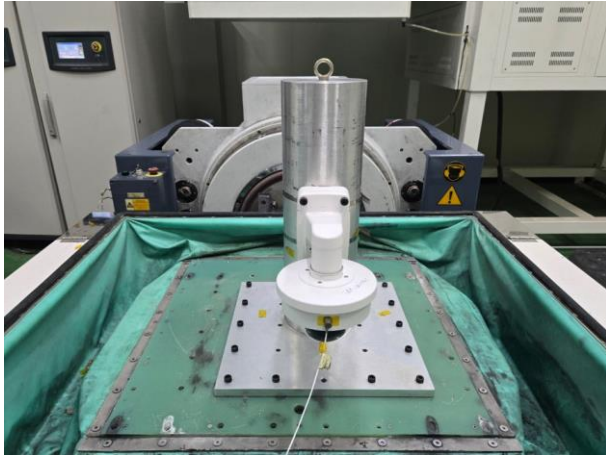


X axis_1

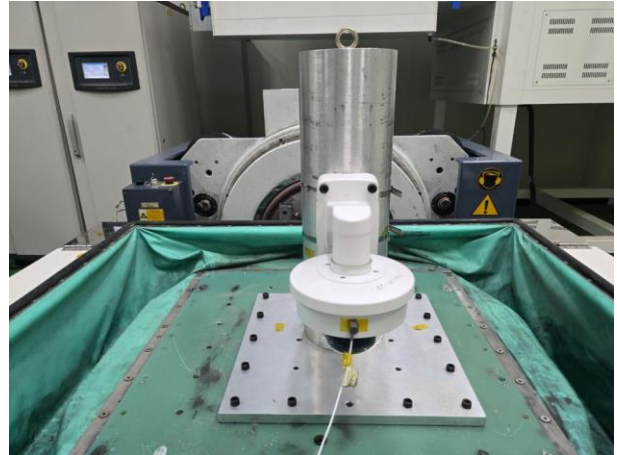

X axis_2

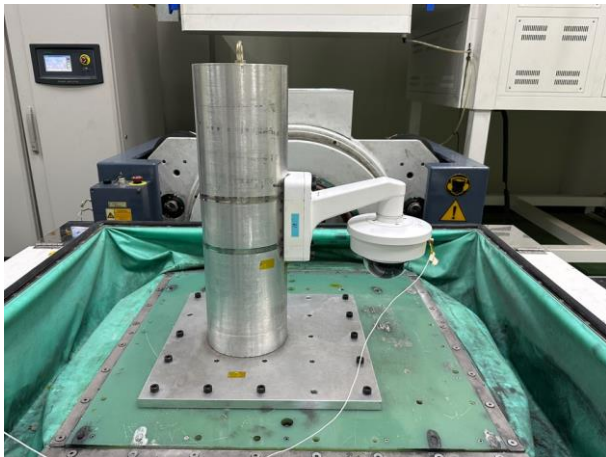


Y axis_1

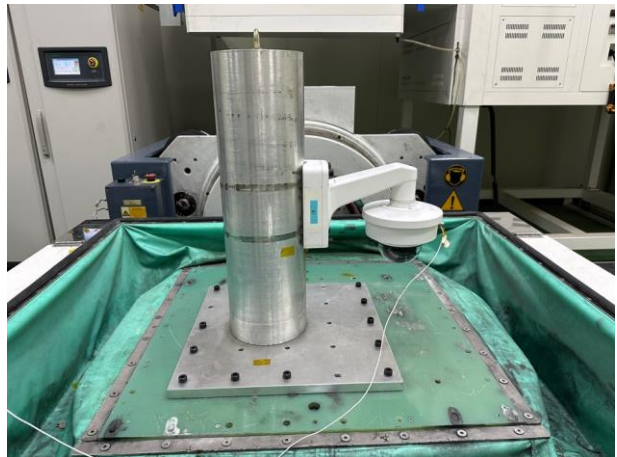

Y axis_2



Z axis_1

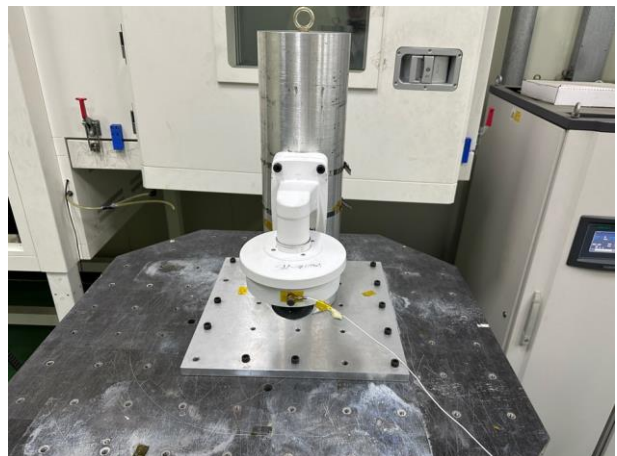

Z axis_2

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (20) / (24) pages

5.4 Test Result

5.4.1 Test result table

Evaluation Criteria		Test Results	Comment
Shock(impact) Test	Before	Normal	
	After	Normal	




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (21) / (24) pages

5.5 Test Data

5.5.1 Test Data X Axis

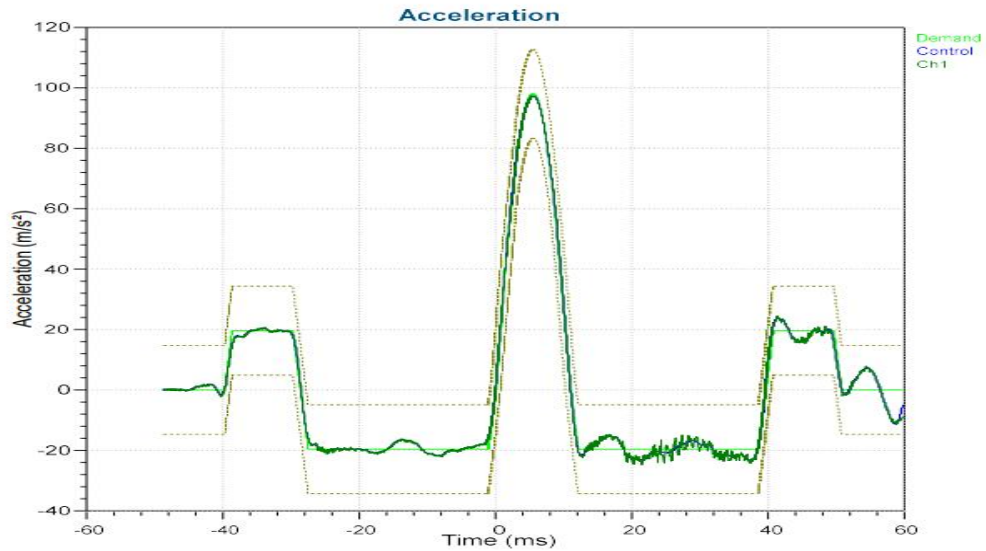

X+

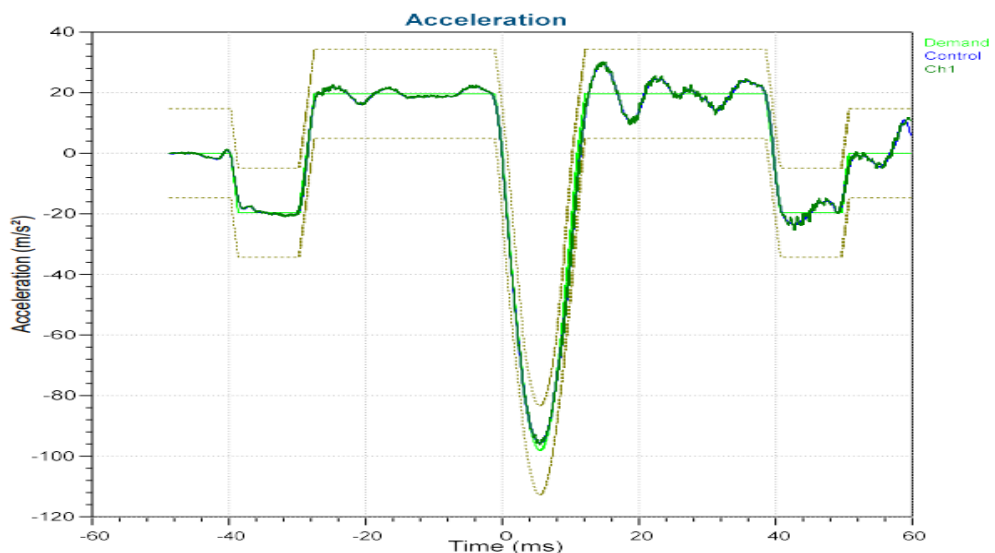

X-




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (22) / (24) pages

5.5.2 Test Data Y Axis

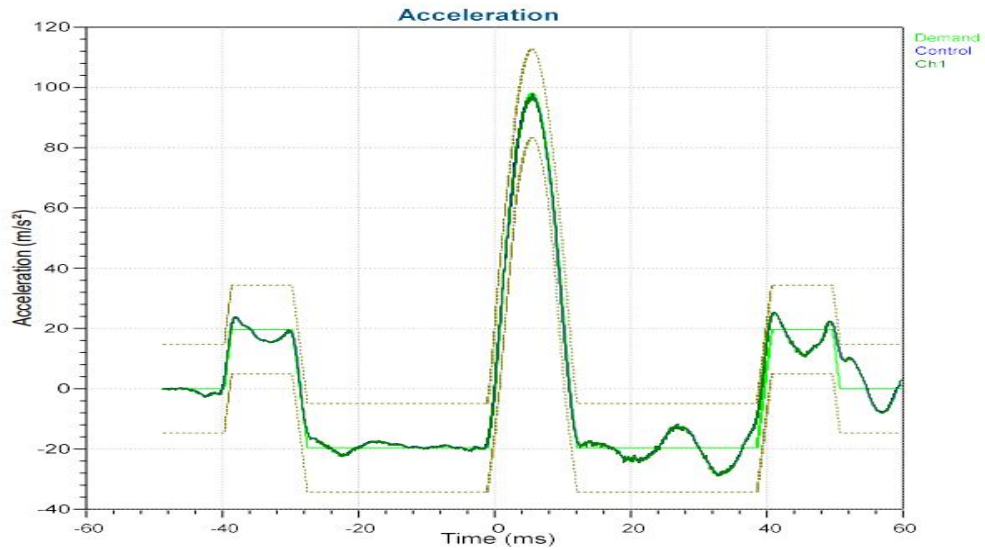

2 20, 2025 15:21:23 Level 1) 100 % Output: 0.6799 Volts peak 2025-02-14 NEMA-TS 2.2.9
Demand: 98.07 m/s^2
Control: 96.84 m/s^2 Pulse: 1 of 1 Running

Y+

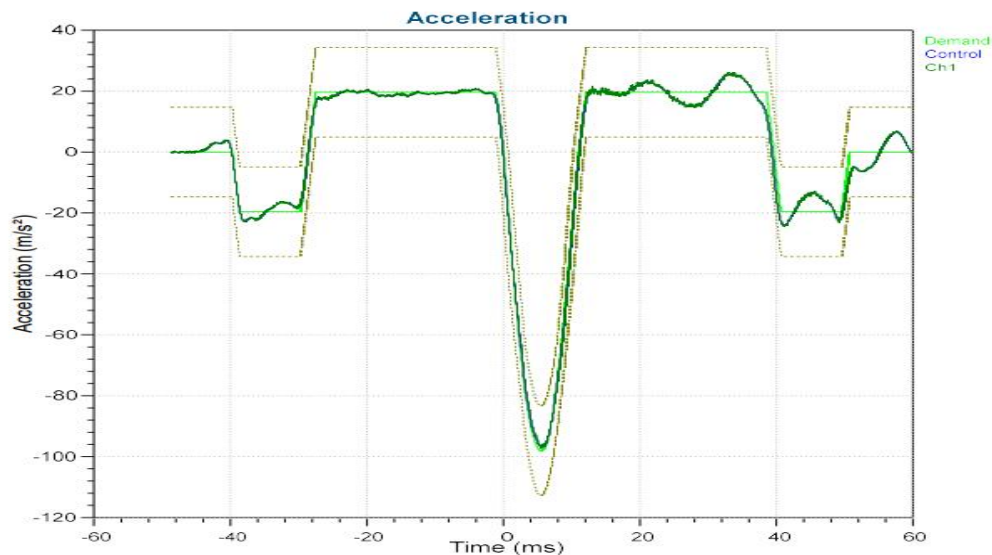

2 20, 2025 15:21:29 Level 2) 100 % Output: 0.6937 Volts peak 2025-02-14 NEMA-TS 2.2.9
Demand: 98.07 m/s^2
Control: 96.79 m/s^2 Pulse: 1 of 1 End of Test

Y-




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2025-00641
Page (23) / (24) pages

5.5.3 Test Data Z Axis

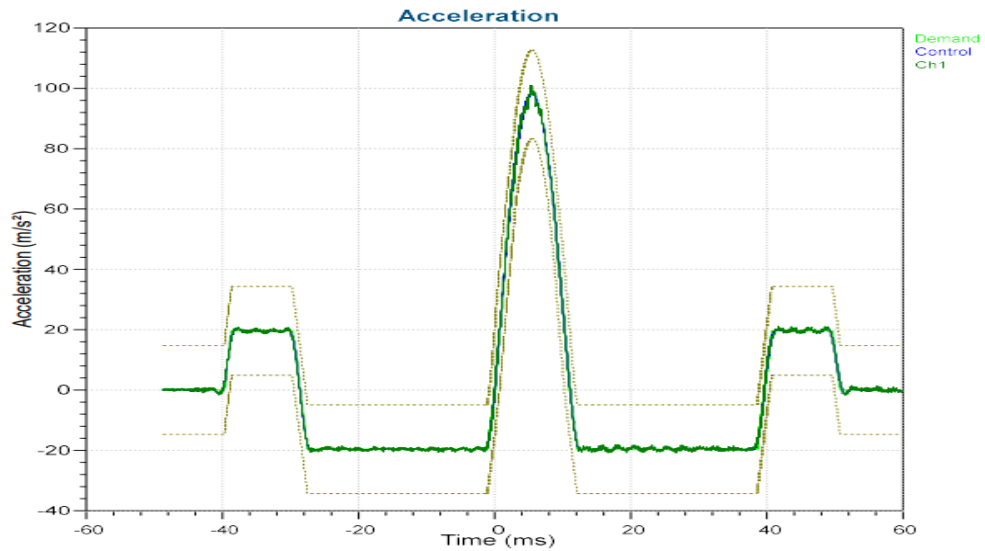

2 21, 2025 15:58:05 Level 1) 100 % Output: 0.6588 Volts peak 2025-02-14 NEMA-TS 2.2.9
Demand: 98.07 m/s²
Control: 98.21 m/s² Pulse: 1 of 1 Running

Z+

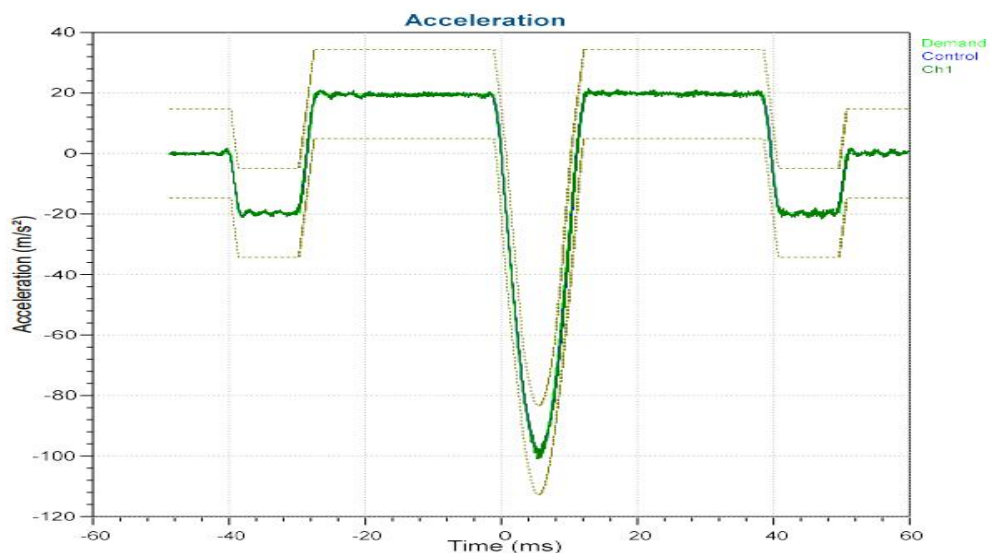

2 21, 2025 15:58:11 Level 2) 100 % Output: 0.658 Volts peak 2025-02-14 NEMA-TS 2.2.9
Demand: 98.07 m/s²
Control: 98.96 m/s² Pulse: 1 of 1 End of Test

Z-



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2025-00641
Page (24) / (24) pages

5.6 Post-test product images

5.6.1 Test sample



Top



Bottom



Front



Rear



Left side



Right side

- End -