

# EMC TEST REPORT For RCM


Test Report No. : KES-EM-23T0292  
Date of Issue : Apr. 06, 2023  
Product name : Network Camera  
Model/Type No. : ANV-L6082R  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Mar. 30, 2023  
Test date : Apr. 03, 2023  
Test Results :  **In Compliance**  **Not in Compliance**

*Tested by*



Dae Hyun, Kim  
EMC Test Engineer

*Reviewed by*



Dong Il, Lee  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (2) of (31)

---

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Apr. 06, 2023	KES-EM-23T0292	Issued

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

---

## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	8
1.2	Variant Model Differences .....	8
1.3	Device Modifications .....	8
1.4	Equipment Under Test.....	8
1.5	Support Equipments .....	8
1.6	External I/O Cabling .....	9
1.7	EUT Operating Mode(s) .....	9
1.8	Configuration.....	10
1.9	Remarks when standards applied .....	11
1.10	Calibration Details of Equipment Used for Measurement .....	11
1.11	Test Facility .....	11
1.12	Laboratory Accreditations and Listings .....	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports .....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	15
2.4	Radiated Electric Field Emissions(Above 1 GHz) .....	16
APPENDIX A – TEST DATA.....		17
	Conducted Emissions at Mains Power Ports.....	17
	Conducted Emissions at Telecommunication Ports .....	19
	Radiated Electric Field Emissions(Below 1 GHz) .....	20
	Radiated Electric Field Emissions(Above 1 GHz).....	21
	Test Setup Photos and Configuration .....	22
	Conducted Emissions at Mains Power Ports.....	22
	Conducted Emissions at Telecommunication Ports .....	23
	Radiated Electric Field Emissions(Below 1 GHz) .....	24
	Radiated Electric Field Emissions(Above 1 GHz).....	25
	EUT External Photographs .....	26
	EUT Internal Photographs .....	27

## 1.0 General Product Description

### Main Specifications of EUT are:

<b>Video</b>	
Imaging Device	1/2.8" CMOS
Resolution	1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.264 : Max. 30fps/25fps(60Hz/50Hz) MJPEG : Max. 2fps at 1920x1080, Max.. 3fps at 1280x960, 1280x720, Max. 10fps at other resolution
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.03Lux(F1.6, 1/30sec) BW : 0Lux (IR LED on)
Video Out	None
Video Transmission Distance	None
<b>Lens</b>	
Focal Length (Zoom Ratio)	3.3~10.3mm(3.1x) motorized varifocal
Max. Aperture Ratio	F1.6(Wide) ~ F3.3(Tele)
Angular Field of View	H: 105.2°(Wide) ~ 30.6°(Tele) V: 54.8°(Wide) ~ 17.2°(Tele) D: 126.9°(Wide) ~ 35.1°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	DC auto iris
Mount Type	None
Optional Lens	None
<b>Pan / Tilt / Rotate</b>	
Pan / Tilt / Rotate Range	0°~350° / 0°~67° / 0°~355°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
<b>Operational</b>	
Camera Title	Displayed up to 15 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120dB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (5) of (31)

Digital Noise Reduction	SSNR
Digital Image Stabilization	None
Defog	None
Motion Detection	4ea, rectangular zones
Privacy Masking	6ea, rectangular zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Digital PTZ	None
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Motion detection, Tampering
Business Intelligence	None
Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC recording at event triggers
Audio Streaming	None
Audio In	None
Audio Out	None
IR Viewable Length	30m(98.43ft)
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
<b>Radiometry</b>	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
<b>Network</b>	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.264: Main/Baseline/High, MJPEG

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Report No.:  
 KES-EM-23T0292  
 Page (6) of (31)

Audio Compression	None
Smart Codec	WiseStreamII
Video Quality Adjustment	H.264: Target bitrate level control MJPEG: Quality level control
Bitrate Control	H.264: CBR or VBR MJPEG: VBR
Streaming	Unicast(6 users) / Multicast Multiple streaming (Up to 3 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour
SIP support (VoIP, Peer-to-peer, SIP/PB)	None
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API)
<b>General</b>	
Webpage Language	English
Web Viewer	None
Edge Storage	Micro SD/SDHC 1slot 32GB
Memory	512MB RAM, 256MB Flash
<b>Environmental &amp; Electrical</b>	
Operating Temperature / Humidity	-30°C ~ +55°C(-22°F ~ +131°F) / Less than 95% RH * Start up should be done at above -20°C(-4°F)
Storage Temperature / Humidity	-30°C ~ +55°C(-22°F ~ +131°F) / Less than 95% RH
Certification	IP66, IK10
Input Voltage	PoE(IEEE802.3af, Class3)
Power Consumption	Max 7.0W, Typical 5.0W
<b>Mechanical</b>	
Color / Material	White / Plastic, Aluminum
RAL Code	RAL9003
Product Dimensions / Weight	Ø137.8x107.1mm(Ø5.43x4.22"), 550g
Compatible Conduit hole / Gangbox	None / Single, Double, 4" Octagon
Hanging Mount (Dome)	SBP-301HMW2
Skin Cover	None
Skin Cover (Dome)	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (7) of (31)

Weather Cap (Dome)	None
Power Module	None
Backbox	SBV-A14B
<b>DORI (EN62676-4 standard)</b>	
Detect (25PPM/ 8PPF)	Wide: 26.5m(87.07ft) / Tele: 70.3m(230.59ft)
Observe (63PPM/ 19PPF)	Wide: 10.6m(34.83ft) / Tele: 28.1m(92.24ft)
Recognize (125PPM/ 38PPF)	Wide: 5.3m(17.41ft) / Tele: 14.1m(46.12ft)
Identify (250PPM/ 76PPF)	Wide: 2.7m(8.71ft) / Tele: 7.0m(23.06ft)
<b>LPR/ANPR/MMCR</b>	
Speed Description	None
Speed limit	None
Min. Forward Distance	None
Max. Forward Distance	None
Max. Horizontal Angle	None
Max. Vertical Angle	None
Horizontal Offset	None
Camera Height	None
Lane Coverage	None
Vehicle Recognition	None
Available Countries	None
<b>Wisenet Road AI LPR/ANPR/MMCR</b>	
Solution	None
Speed Description	None
Lane Coverage	None
Speed limit	None
Min. Forward Distance	None
Max. Forward Distance	None
Max. Horizontal Angle	None
Max. Vertical Angle	None
Horizontal Offset	None
Camera Height	None
Vehicle Recognition	None
Available Countries	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

PoE

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	ANV-L6082R	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Micro SD Card	-	-	SanDisk	-
Notebook	Latitude 5300	8C47BE45C060	DELL INC.	-
Notebook Adapter	HA65NM130	-	Chicony Power Technology(Suzhou)Co.,L td.	-
PoE Adapter	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co., Ltd	-



## 1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.5	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45 (LAN)	1.5	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.7	U

\* Unshielded = U, Shielded = S


## 1.7 EUT Operating Mode(s)

Test mode	operating
Operation	1. Check if the EUT image is output to the laptop normally. 2. Check if the network is operating normally through a ping test. 3. After the test, check if the EUT video has been recorded normally.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

## 1.8 Configuration

■ AC Main  
□ DC Main

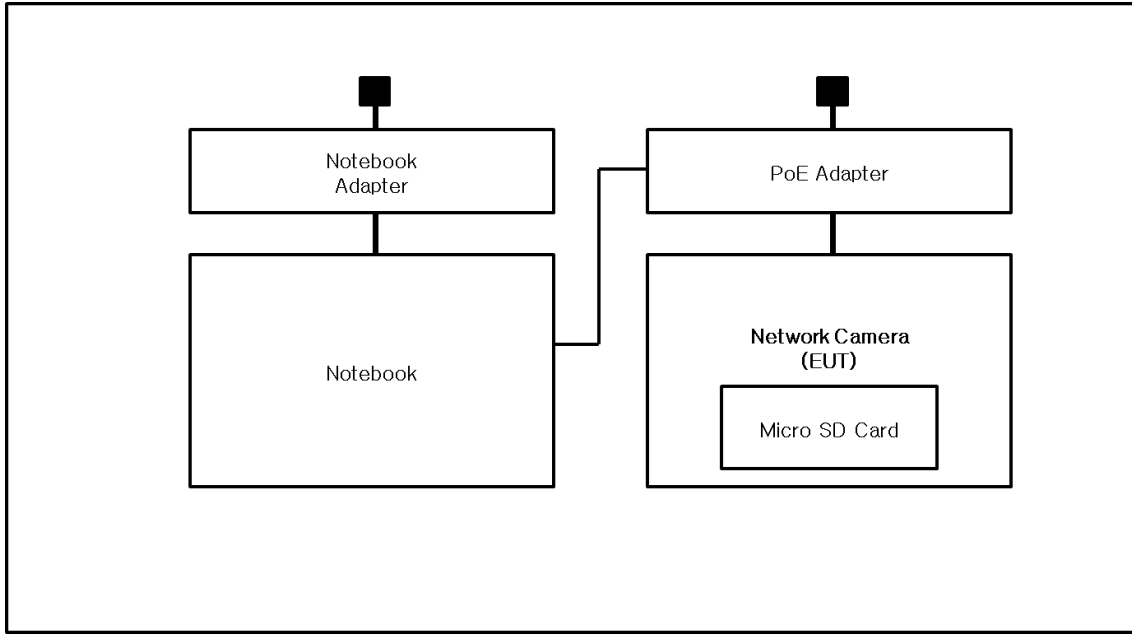

## 1.9 Remarks when standards applied

N/A







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (12) of (31)

---

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

**AS/NZS CISPR 32:2015 AMD 1:2020**                       Class A                       Class B

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

N/A

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
<input type="checkbox"/>	LISN	ENV216	R & S	101787	11, 10, 2023
<input type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
<input type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

**Test Conditions**

Temperature: ( ± ) °C

Relative Humidity: ( ± ) % R.H.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

**Remarks**

It is not tested apply because it is powered by PoE

## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Apr. 03, 2023

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	11, 10, 2023
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
<input checked="" type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	11, 22, 2023
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	11, 22, 2023
<input type="checkbox"/>	CDN	CDNS502A	TESEQ	40431	11, 10, 2023

### Test Conditions

Temperature: (22,9 ± 0,1) °C  
Relative Humidity: (42,6 ± 0,1) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

### Remarks

- See Appendix A for test data.  
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

Apr. 03, 2023

**Test Location** OPEN AREA TEST SITE #2       SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	03, 21, 2024
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 03, 2024

**Test Conditions**Temperature: (21,7 ± 0,1) °C  
Relative Humidity: (42,9 ± 0,1) % R.H.**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- 
- PASS
- 
- 
- NOT PASS
- 
- 
- NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Apr. 03, 2023

### Test Location

SEMI ANECHOIC CHAMBER #5

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 21, 2024
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
<input checked="" type="checkbox"/>	ATTENUATOR	8491B	HP	23094	03, 21, 2024

### Test Conditions

Temperature: (24,5 ± 0,1) °C  
 Relative Humidity: (43,1 ± 0,0) % R.H.

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (17) of (31)

---

## **APPENDIX A – TEST DATA**

### **Conducted Emissions at Mains Power Ports HOT LINE**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (18) of (31)

---

NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Emissions at Telecommunication Ports [100 Mbps]

### Common Information

Test Description:	Telecommunication Emission
Model No.:	ANV-L6082R
Mode :	
Speed :	100 Mbps
Operator Name:	KES

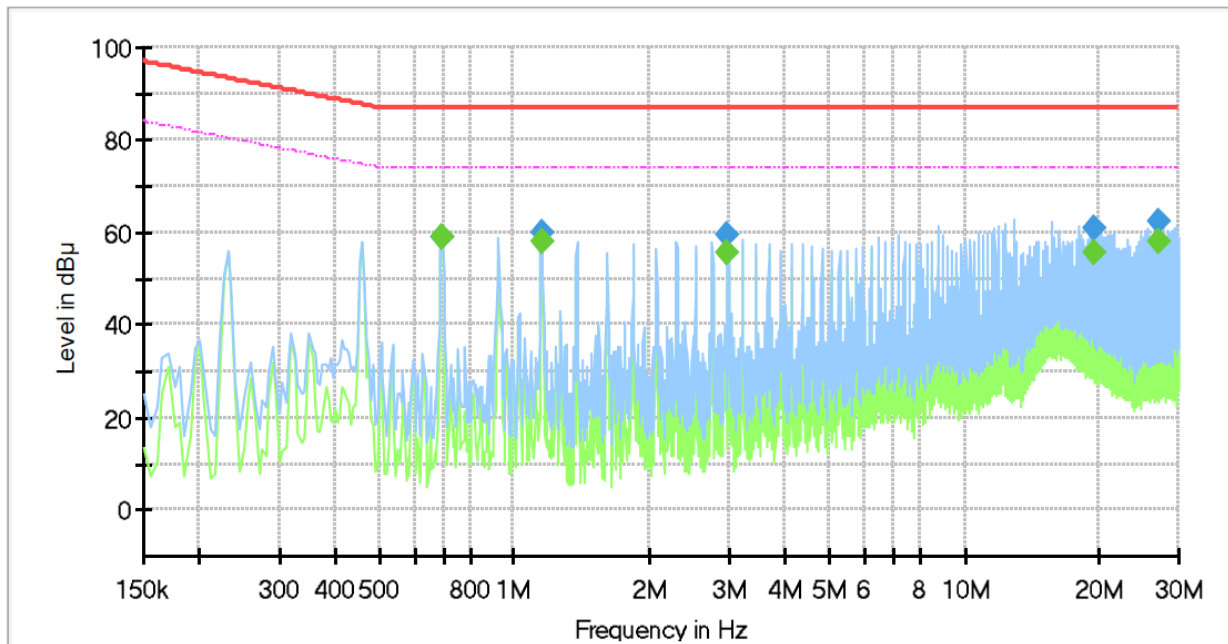

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.690000	---	58.80	74.00	15.20	1000.0	9.000	Single Line	19.9
0.690000	59.18	---	87.00	27.82	1000.0	9.000	Single Line	19.9
1.150000	---	57.94	74.00	16.06	1000.0	9.000	Single Line	20.1
1.150000	60.00	---	87.00	27.00	1000.0	9.000	Single Line	20.1
2.985000	---	55.81	74.00	18.19	1000.0	9.000	Single Line	20.0
2.985000	59.69	---	87.00	27.31	1000.0	9.000	Single Line	20.0
19.520000	---	55.50	74.00	18.50	1000.0	9.000	Single Line	20.0
19.520000	61.14	---	87.00	25.86	1000.0	9.000	Single Line	20.0
27.095000	---	58.05	74.00	15.95	1000.0	9.000	Single Line	20.4
27.095000	62.33	---	87.00	24.67	1000.0	9.000	Single Line	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

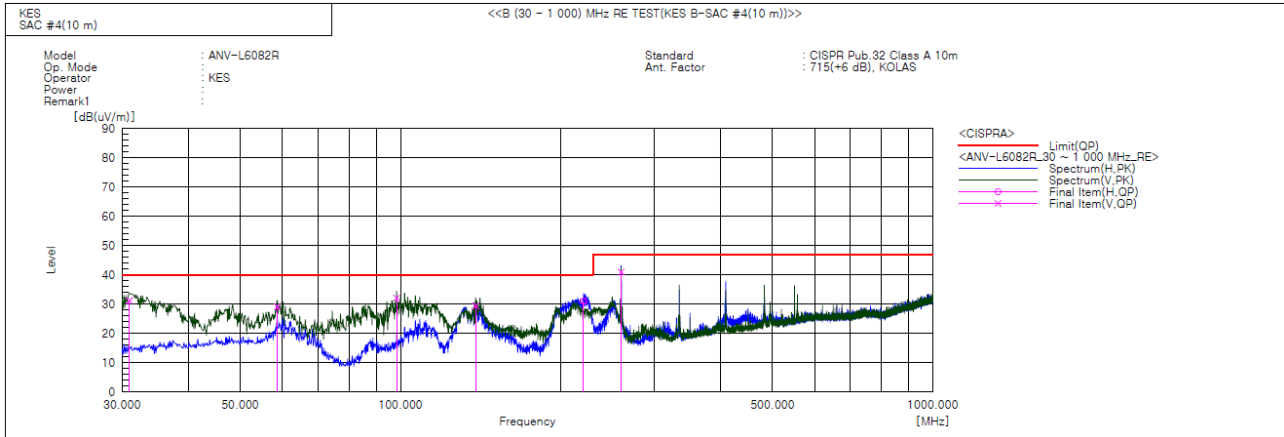

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.970	V	56.1	-24.9	31.2	40.0	8.8	110.0	102.0	
2	58.736	V	50.6	-21.5	29.1	40.0	10.9	105.0	296.0	
3	98.385	V	54.6	-22.5	32.1	40.0	7.9	100.0	258.0	
4	138.398	V	54.9	-25.4	29.5	40.0	10.5	150.0	247.0	
5	220.848	H	50.9	-19.9	31.0	40.0	9.0	400.0	161.0	
6	259.890	V	60.0	-19.1	40.9	47.0	6.1	160.0	164.0	

### ◆ Calculation

$$\text{Result(QP)} [\text{dB}(\mu\text{V}/\text{m})] = (\text{Reading(QP)}[\text{dB}(\mu\text{V})] + \text{c.f}[\text{dB}(1/\text{m})])$$


$$\text{Margin(QP)}[\text{dB}] = \text{Limit}[\text{dB}(\mu\text{V}/\text{m})] - \text{Result(QP)} [\text{dB}(\mu\text{V}/\text{m})]$$

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



## Radiated Electric Field Emissions(Above 1 GHz)

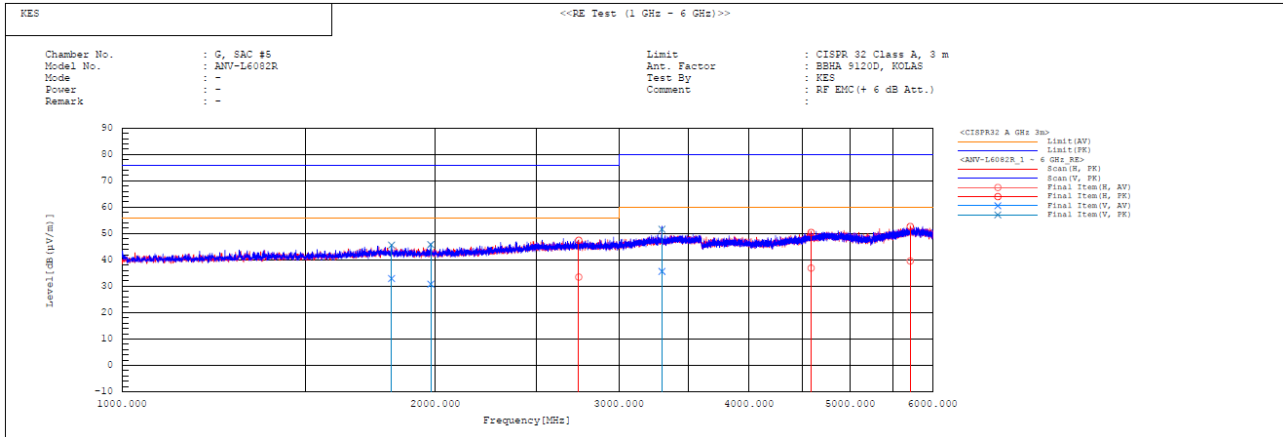

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1815.489	V	31.1	43.8	1.8	32.9	45.6	56.0	76.0	23.1	30.4	100.0	359.3	
2	1979.200	V	28.9	43.9	1.9	30.8	45.8	56.0	76.0	25.2	30.2	100.0	330.1	
3	2745.230	H	28.9	42.8	4.6	33.5	47.4	56.0	76.0	22.5	28.6	100.0	113.0	
4	3299.868	V	29.7	45.7	5.9	35.6	51.6	60.0	80.0	24.4	28.4	100.0	320.4	
5	4597.660	H	27.4	40.9	9.5	36.9	50.4	60.0	80.0	23.1	29.6	100.0	124.9	
6	5711.497	H	27.4	40.5	12.2	39.6	52.7	60.0	80.0	20.4	27.3	100.0	41.3	

◆ Calculation

$$\text{Result(PK/CAV)} [dB(\mu V/m)] = (\text{Reading(PK/CAV)} [dB(\mu V)] + \text{c.f} [dB(1/m)])$$

$$\text{Margin(PK/CAV)} [dB] = \text{Limit} [dB(\mu V/m)] - \text{Result(PK/CAV)} [dB(\mu V/m)]$$

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-23T0292  
Page (22) of (31)

---

## **Test Setup Photos and Configuration Conducted Emissions at Mains Power Ports**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Conducted Emissions at Telecommunication Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr





## Radiated Electric Field Emissions(Below 1 GHz)

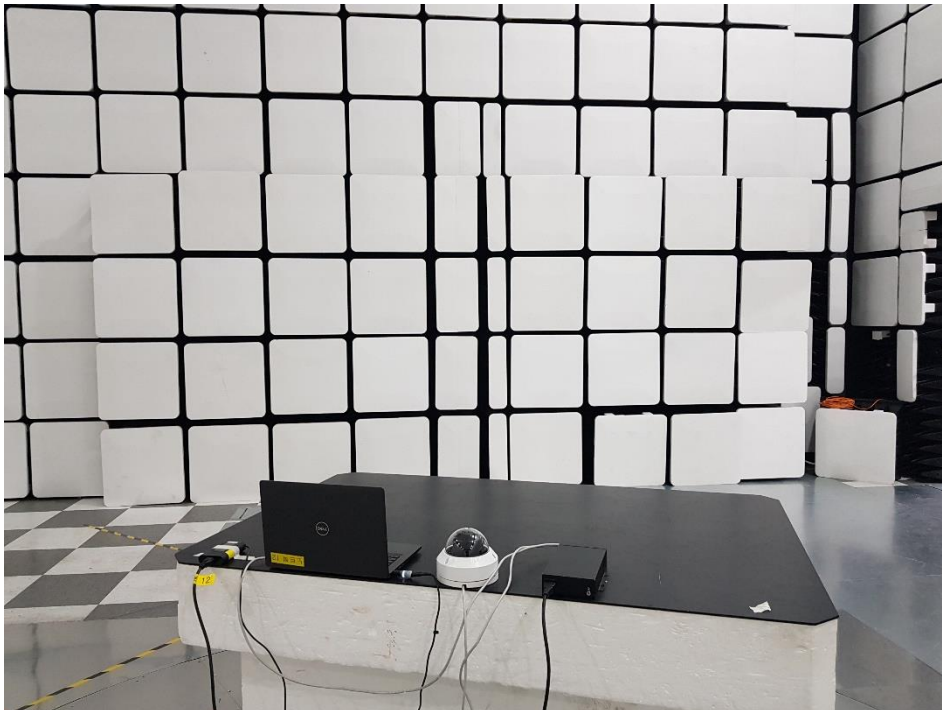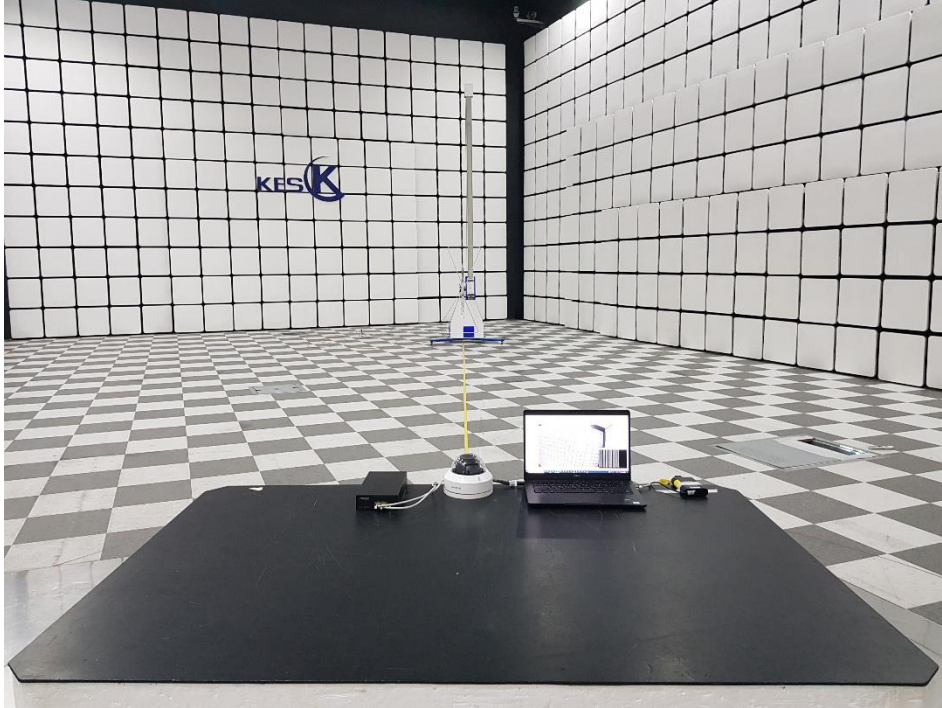

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

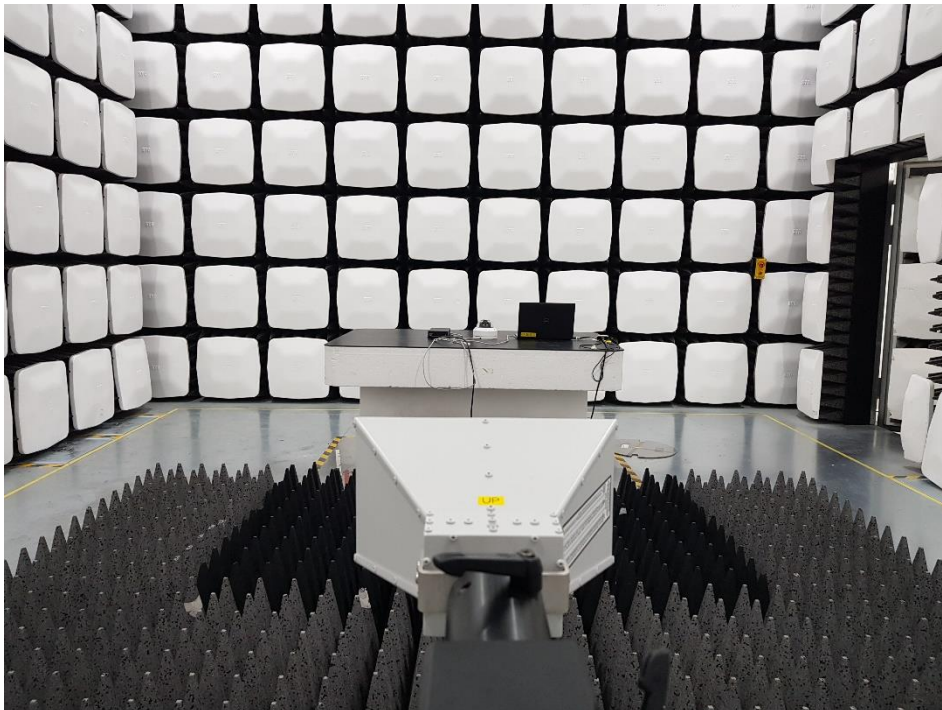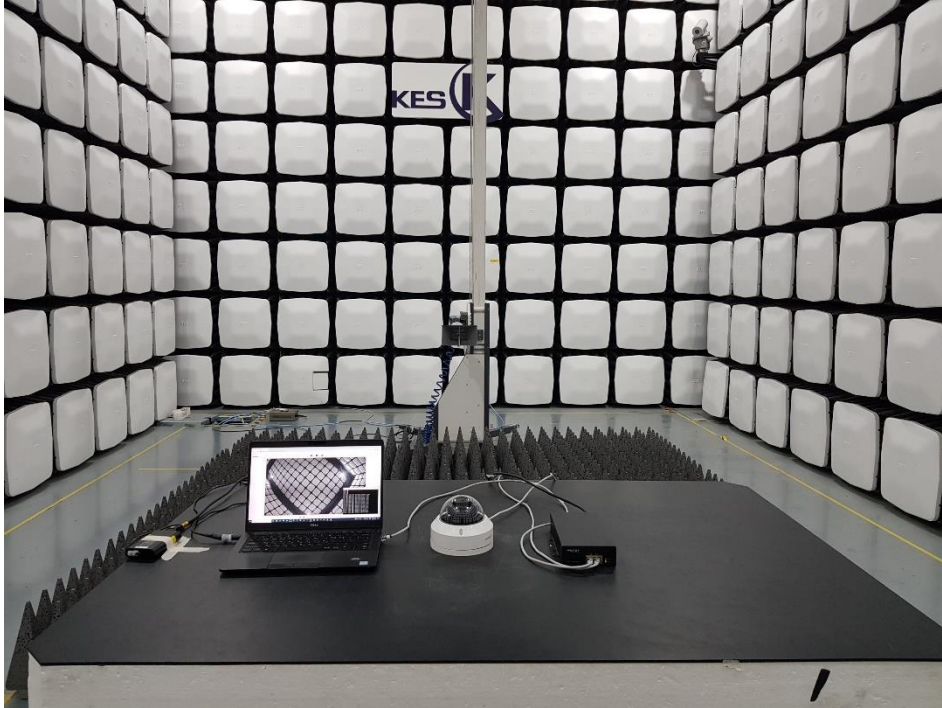

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

---

## EUT External Photographs

(Top)



(Bottom)



---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal Photographs

(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



---

## EUT Internal View – Board 1

(Top)



(Bottom)



---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Board 2

(Top)



(Bottom)

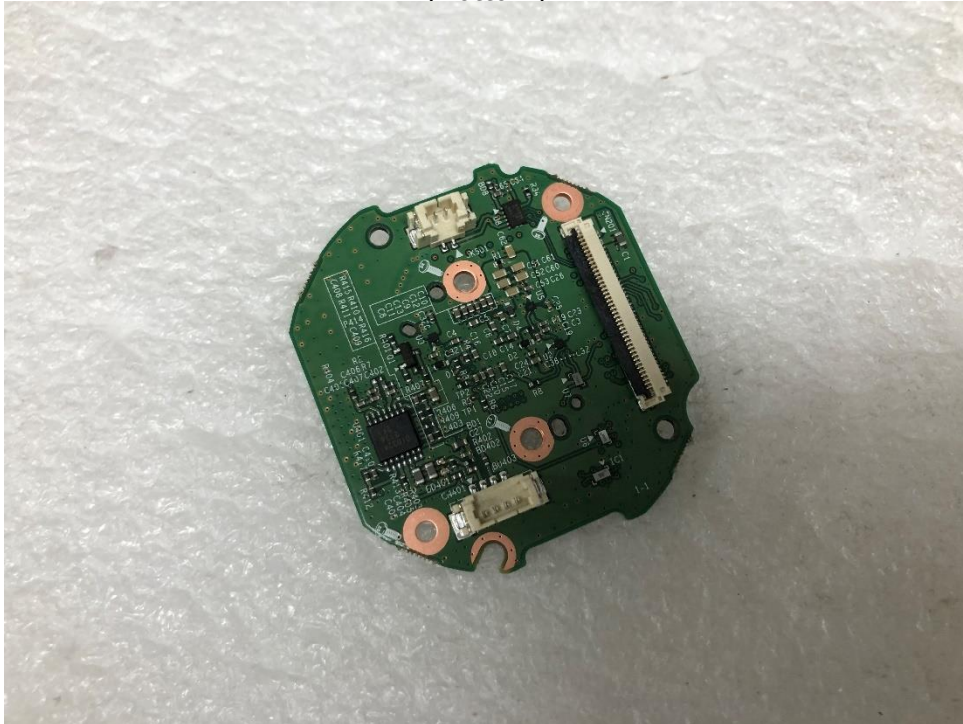

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



### EUT Internal View – Board 3

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

---

## EUT Internal View – Lens

(Top)



(Bottom)



---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr