



## EMC TEST REPORT For RCM

Test Report No. : KES-EM-22T0308  
Date of Issue : Apr. 04, 2022  
Product name : THERMAL CAMERA  
Model/Type No. : TNM-C4940TD  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Mar. 11, 2022  
Test date : Mar. 16, 2022 ~ Mar. 17, 2022  
Test Results :  **In Compliance**  **Not in Compliance**

Tested by

Ki Man, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0308  
Page (2) of (45)

---

**REPORT REVISION HISTORY**

<b>Date</b>	<b>Test Report No.</b>	<b>Revision History</b>
Apr. 04, 2022	KES-EM-22T0308	Issued

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	6
1.2	Variant Model Differences .....	6
1.3	Device Modifications .....	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments .....	7
1.6	External I/O Cabling .....	8
1.7	EUT Operating Mode(s) .....	9
1.8	Configuration.....	10
1.9	Remarks when standards applied .....	11
1.10	Calibration Details of Equipment Used for Measurement .....	11
1.11	Test Facility .....	11
1.12	Laboratory Accreditations and Listings .....	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports .....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	15
2.4	Radiated Electric Field Emissions(Above 1 GHz) .....	16
APPENDIX A – TEST DATA.....		17
	Conducted Emissions at Mains Power Ports.....	17
	Conducted Emissions at Telecommunication Ports .....	19
	Radiated Electric Field Emissions(Below 1 GHz) .....	21
	Radiated Electric Field Emissions(Above 1 GHz).....	23
	Test Setup Photos and Configuration .....	25
	Conducted Emissions at Mains Power Ports.....	25
	Conducted Emissions at Telecommunication Ports .....	26
	Radiated Electric Field Emissions(Below 1 GHz) .....	28
	Radiated Electric Field Emissions(Above 1 GHz).....	30
	EUT External Photographs .....	32
	EUT Internal Photographs .....	33



## 1.0 General Product Description

### Main Specifications of EUT are:

Spec Display Name	Thermal	Visible
<b>Video</b>		
Imaging Device	Uncooled micro bolometer	1/1.8" CMOS
Resolution	1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360	3840x2160, 3072x1728, 2592x1944, 2688x1520, 2560x1440, 2048x1536, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.265/H.264: Max. 30fps MJPEG: Max. 3fps	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 1fps/1fps(60Hz/50Hz)
NETD	< 60mK	None
Pixel Size	1.2µm	None
Min. Illumination	None	Color: 0.06Lux(F1.3, 1/30sec) BW: 0.004Lux(F1.3, 1/30sec), 0Lux(IR LED on)
Video Out	USB : Micro USB Type B	
<b>Lens</b>		
Focal Length (Zoom Ratio)	9.1mm fixed focal	4.4~9.3mm(2.2x) motorized varifocal
Max. Aperture Ratio	F1.0	F1.3(Wide)~F2.15(Tele)
Angular Field of View	H: 50.0°, V: 37.0°, D: 63.8°	H:112.1°(Wide)~47.5°(Tele) / V:58.0°(Wide)~26.6°(Tele) / D:137.5°(Wide)~54.6°(Tele)
Min. Object Distance	3.5m(11.48ft)	Wide: 1.75m(5.74ft) / Tele: 5.21m(17.09ft)
Focus Control	Fixed	Simple focus
Lens Type	None	
Mount Type	None	
Optional Lens	None	
<b>Pan / Tilt / Rotate</b>		
Pan / Tilt / Rotate Range	None	
Pan Range	None	
Pan Speed	None	
Tilt Range	None	
Tilt Speed	None	
Rotate Range	None	
Sequence	None	
Preset Accuracy	None	
<b>Operational</b>		
Camera Title	Displayed up to 85 characters	
Direction Indicator	None	None
Day & Night	None	Auto(ICR)
Backlight Compensation	None	BLC, WDR, SDR
Wide Dynamic Range	None	WDR(120dB)
Digital Noise Reduction	None	SSNR V, WiseNR II
Digital Image Stabilization	None	Support(built-in gyro sensor)
Defog	None	None
Motion Detection	6ea, polygonal zones	
Privacy Masking	6ea, rectangle zones - Color: Gray/Black/White	
Gain Control	None	Low / Middle / High
White Balance	None	ATW / AWC / Manual / Indoor / Outdoor
LDC	None	Support
Electronic Shutter Speed	None	Minimum / Maximum / Anti flicker(1/5~1/12,000sec) Auto prefer shutter control(Based on AI engine)
Analytics	- Analytics events : Directional detection, Motion detection, Enter/Exit, Virtual line, Temperature Change detection	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle(car/truck/bus/bicycle/motorcycl e)/License plate), Bestshot, IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion), Stopped vehicle, Traffic jam - Analytics events : Defocus detection, Motion detection, Tampering, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	None	None
Alarm I/O	4 configurable I/O ports	
Alarm Triggers	Analytics, Network disconnect, Alarm input	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Report No.:  
 KES-EM-22T0308  
 Page (5) of (45)

Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback	
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm	
Audio Out	Line out, Max.output level: 1Vrms	
IR Viewable Length	None	30m
Color Palettes	Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom	None
<b>Network</b>		
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)	
Video Compression	H.265/H.264: Main/High, MJPEG	
Audio Compression	G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz	
Smart Codec	WiseStreamII	Manual(Sea area), WiseStreamIII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control	
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	
Streaming	Unicast(6 users) / Multicast Multiple streaming(Up to 3 profiles)	
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)	
Security	TPM 2.0 (FIPS 140-2 level 2) HTTPS(SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device certificate(Hanwha Techwin Root CA, pre-installed) Secure boot, Secure firmware	
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API) Wisenet open platform (visible channel only)	
<b>General</b>		
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Swedish, Japanese, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	
Edge Storage	Micro SD/SDHC/SDXC 2slots 512GB	
Memory	4GB RAM, 512MB FLASH	
<b>Environmental &amp; Electrical</b>		
Operating Temperature / Humidity	-40°C to +60°C(-58°F to +140°F) * Start up should be done at above -30°C less than 95% RH(non-condensing)	
Storage Temperature / Humidity	-50°C to +60°C(-58°F to +140°F) / Less than 95% RH(Non-condensing)	
Certification	IP66/IP67, IK10, NEMA4X, NEMA TS 2(2.2.8, 2.2.9)	
Input Voltage	PoE+(IEEE802.3at, Class4), 12V <sub>DC</sub>	
Power Consumption	PoE+ : Max 25.5W 12V <sub>DC</sub> : Max 21.5W	
<b>Mechanical</b>		
Color / Material	White / Aluminum	
RAL Code	RAL9003	
Product Dimensions / Weight	353.4 * 287.5 * 191.2mm (13.92 * 11.32 * 7.53in) / 4.533kg	
<b>DORI (EN62676-4 standard)</b>		
Detect (25PPM/ 8PPF)	None	Wide: 51.7m(169.94ft) / Tele: 174.5m(572.64ft)
Observe (63PPM/ 19PPF)	None	Wide: 20.7m(67.85ft) / Tele: 69.8m(229.06ft)
Recognize (125PPM/ 38PPF)	None	Wide: 10.3m(33.93ft) / Tele: 34.9m(114.53ft)
Identify (250PPM/ 76PPF)	None	Wide: 5.2m(16.96ft) / Tele: 17.5m(57.26ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

AC 240 V, 50 Hz     PoE

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THERMAL CAMERA	TNM-C4940TD	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0308  
Page (7) of (45)

### 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adaptor	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adaptor	PT-PSE106GBR-AH-S	-	Dongguan PROCET Network Technology Co., Ltd	-
Notebook	Latitude 5300	8C47BE45C060	DELL INC.	-
Notebook Adaptor	HA65NM130	-	Chicony Power Technology(Suzhou) Co.,Ltd.	-
MIC	MP1000	-	-	-
Headset	K550	-	Britz®	-
Alarm1	-	-	-	-
Alarm2	-	-	-	-
USB LAN Ccard	U2500	-	ipTIME	-
Micro SD Card1	-	-	SanDisk	32 GB
Micro SD Card2	-	-	SanDisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	2 Pin	Adaptor	2 Pin	1.2	U
	RJ-45	USB LAN Card	RJ-45	3.0	S
	3.5 mm	Headset	3.5 mm	1.7	U
	3.5 mm		3.5 mm	1.7	U
	SLOT	Micro SD Card1	SLOT	-	-
	SLOT	Micro SD Card2	SLOT	-	-
	2 Pin	Alarm1	2 Pin	3.0	U
	2 Pin	Alarm2	2 Pin	3.0	U
Notebook	DC Jack	Notebook Adaptor	DC Jack	1.2	U
	3.5 mm	MIC	3.5 mm	1.7	U
	USB	USB LAN Card	USB	0.1	S

\* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr





■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	3.0	S
	3.5 mm	Headset	3.5 mm	1.7	U
	3.5 mm		3.5 mm	1.7	U
	SLOT	Micro SD Card1	SLOT	-	-
	SLOT	Micro SD Card2	SLOT	-	-
	2 Pin	Alarm1	2 Pin	3.0	U
	2 Pin	Alarm2	2 Pin	3.0	U
Notebook	DC Jack	Notebook Adaptor	DC Jack	1.2	U
	3.5 mm	MIC	3.5 mm	1.7	U
	USB	USB LAN Card	USB	0.1	S
PoE Adaptor	RJ-45 (LAN)	USB LAN Card	RJ-45 (LAN)	3.0	S

\* Unshielded=U, Shielded=S

## 1.7 EUT Operating Mode(s)

operating
EUT Monitoring, Ping Test After the test, the Micro SD Card was checked to see if it was recorded normally.


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


## 1.8 Configuration

■ AC Main  
 □ DC Main

### ■ DC Mode

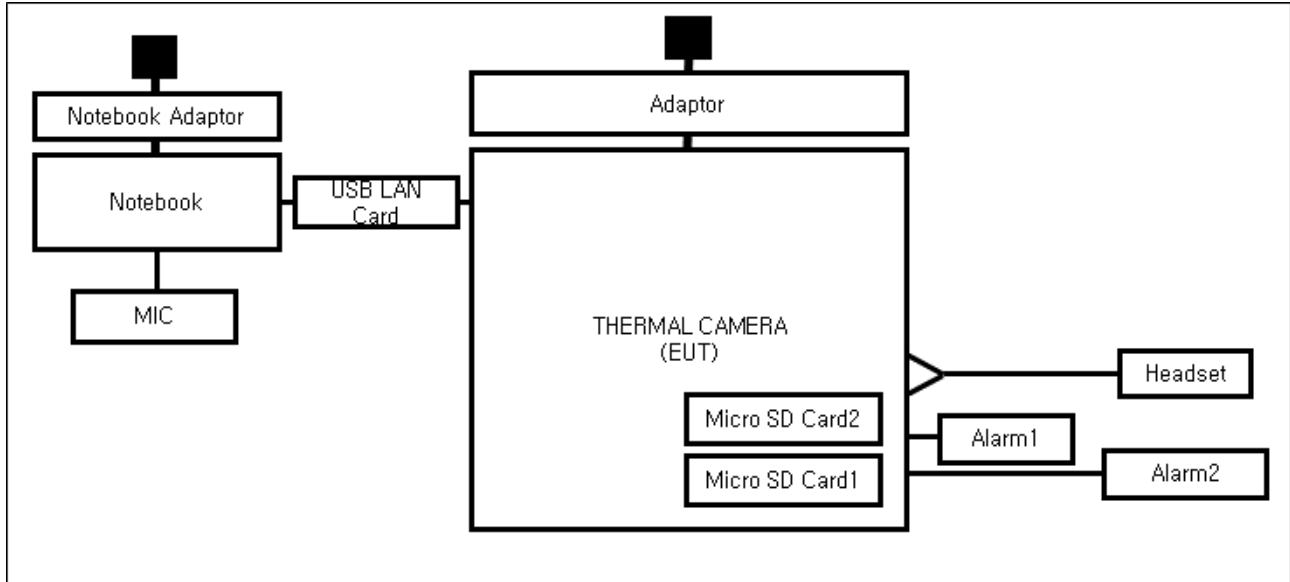

### ■ PoE Mode

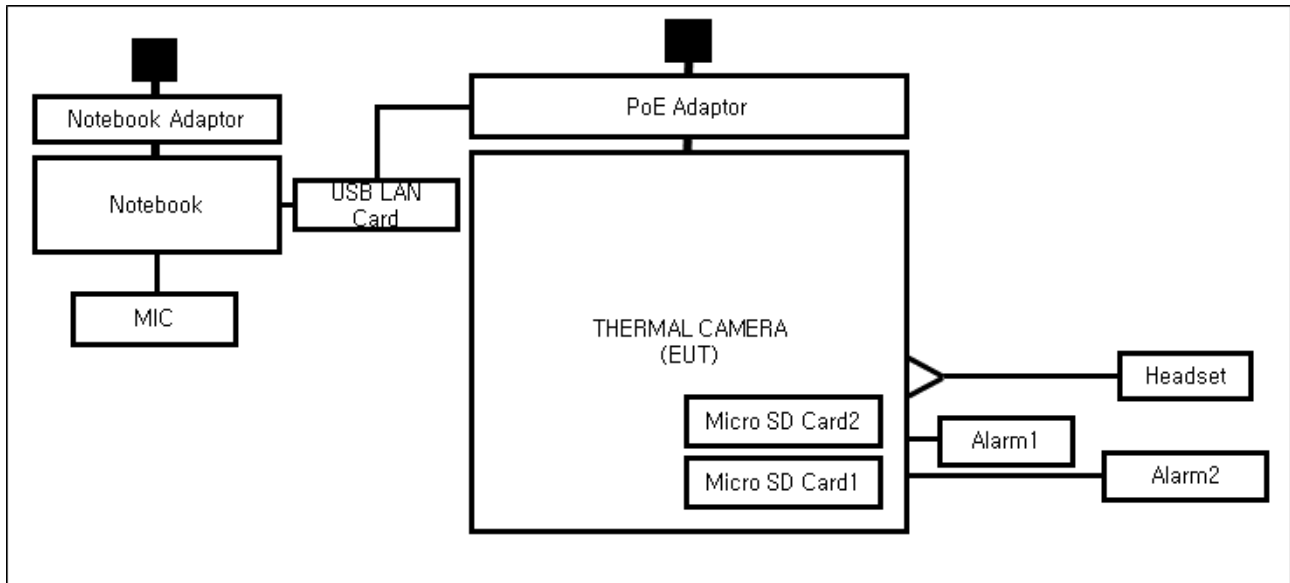

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## 1.9 Remarks when standards applied

USB port is not tested because it is an unused port.







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0308  
Page (12) of (45)

---

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

**AS/NZS CISPR32:2015**

Class A

Class B

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

Mar. 16, 2022

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 27, 2022
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

### Test Conditions

Temperature: (24,4 ± 0,2) °C

Relative Humidity: (43,8 ± 0,3) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Mar. 16, 2022

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 27, 2022
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
<input checked="" type="checkbox"/>	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 07, 2023

### Test Conditions

Temperature: (24,4 ± 0,1) °C

Relative Humidity: (43,8 ± 0,2) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Mar. 16, 2022

### Test Location

OPEN AREA TEST SITE #2       SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 08, 2023

### Test Conditions

Temperature: (24,0 ± 0,2) °C  
Relative Humidity: (43,9 ± 0,4) % R.H.

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

Mar. 17, 2022

**Test Location**

SEMI ANECHOIC CHAMBER #5

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

**Test Conditions**

Temperature: (24,7 ± 0,2) °C

Relative Humidity: (43,9 ± 0,3) % R.H.

**Frequency Range of Measurement**

1 GHz to 6 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

**Remarks**See Appendix A for test data.





## APPENDIX A – TEST DATA


### Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

#### Common Information

Test Description:	Conducted Emission
Model No.:	TNM-C4940TD
Phase:	L1
Mode:	DC
Operator Name:	KES

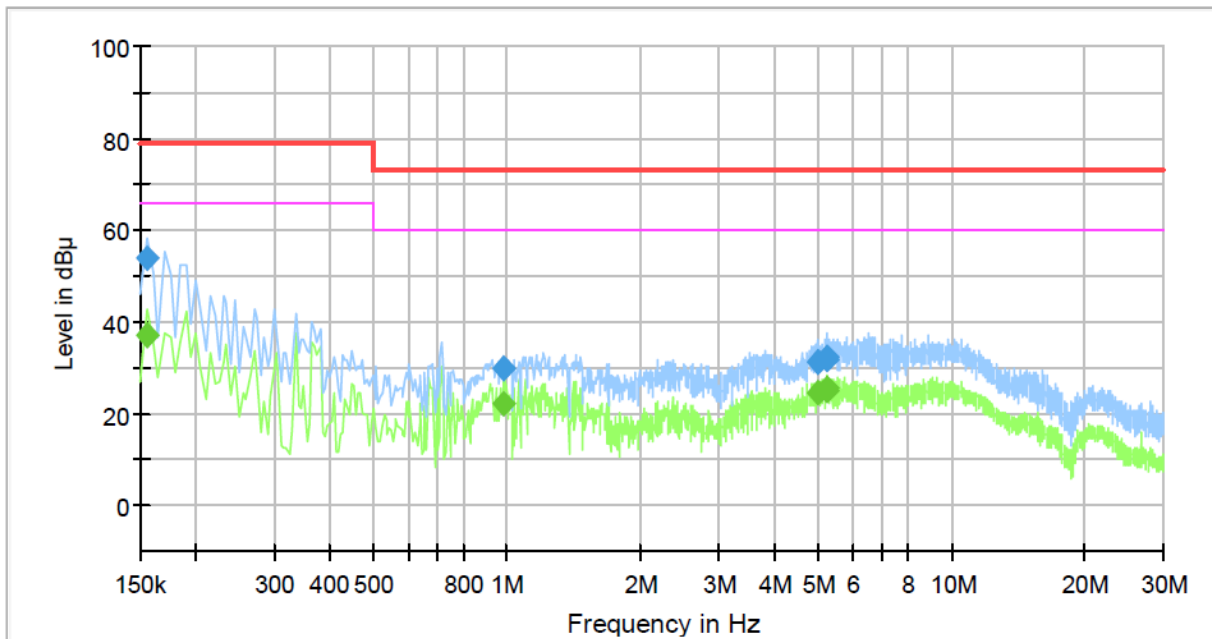

#### Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	37.05	66.00	28.95	1000.0	9.000	L1	19.4
0.155000	53.72	---	79.00	25.28	1000.0	9.000	L1	19.4
0.985000	---	22.02	60.00	37.98	1000.0	9.000	L1	20.0
0.985000	29.85	---	73.00	43.15	1000.0	9.000	L1	20.0
4.990000	---	24.52	60.00	35.48	1000.0	9.000	L1	19.6
4.990000	31.11	---	73.00	41.89	1000.0	9.000	L1	19.6
5.230000	---	25.18	60.00	34.82	1000.0	9.000	L1	19.6
5.230000	31.93	---	73.00	41.07	1000.0	9.000	L1	19.6
5.260000	---	25.57	60.00	34.43	1000.0	9.000	L1	19.6
5.260000	32.15	---	73.00	40.85	1000.0	9.000	L1	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

**Common Information**

Test Description:	Conducted Emission
Model No.:	TNM-C4940TD
Phase:	N
Mode:	DC
Operator Name:	KES

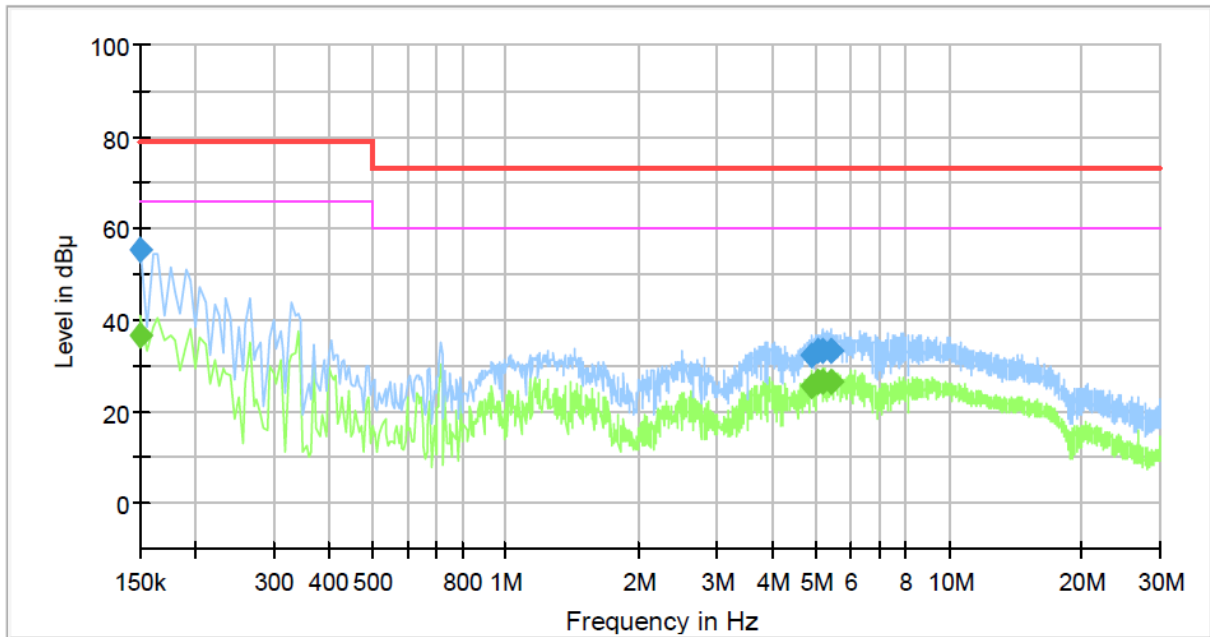

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	36.44	66.00	29.56	1000.0	9.000	N	19.4
0.150000	55.20	---	79.00	23.80	1000.0	9.000	N	19.4
4.910000	---	25.47	60.00	34.53	1000.0	9.000	N	19.6
4.910000	32.07	---	73.00	40.93	1000.0	9.000	N	19.6
5.080000	---	26.57	60.00	33.43	1000.0	9.000	N	19.6
5.080000	33.14	---	73.00	39.86	1000.0	9.000	N	19.6
5.165000	---	26.64	60.00	33.36	1000.0	9.000	N	19.6
5.165000	33.19	---	73.00	39.81	1000.0	9.000	N	19.6
5.440000	---	26.40	60.00	33.60	1000.0	9.000	N	19.6
5.440000	33.39	---	73.00	39.61	1000.0	9.000	N	19.6

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## Conducted Emissions at Telecommunication Ports

■ DC Mode

[1 000 Mbps]

### Common Information

Test Description:	Telecommunication Emission
Model No.:	TNM-C4940TD
Mode :	DC
Speed :	1 000 Mbps
Operator Name:	KES

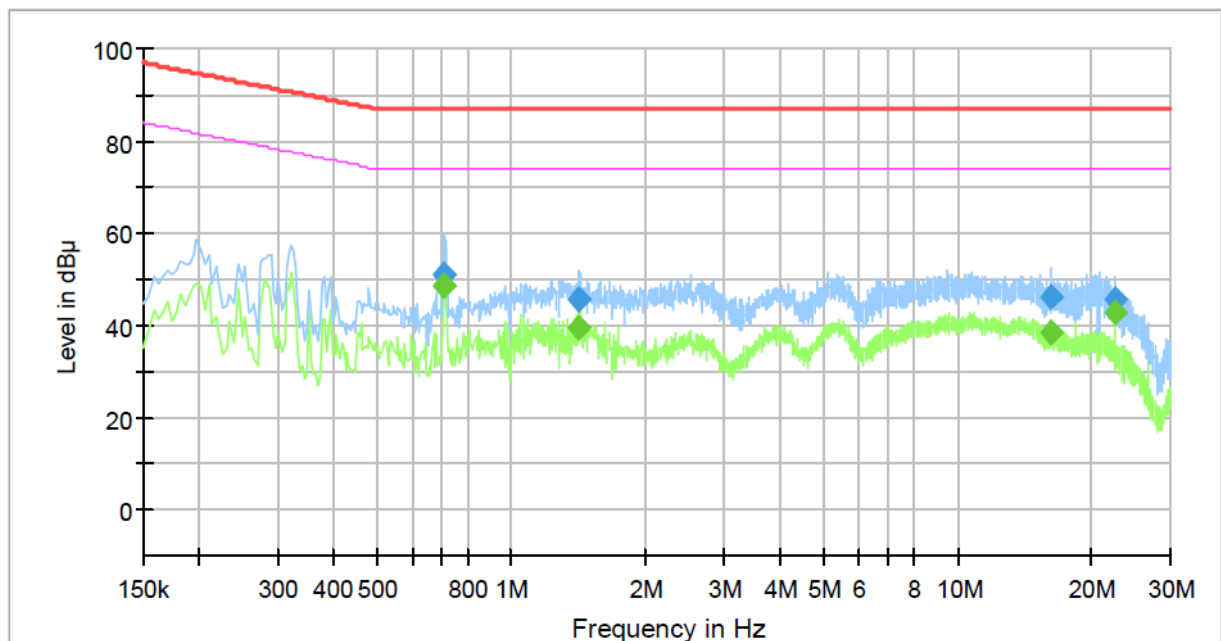

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.710000	---	48.41	74.00	25.59	1000.0	9.000	Single Line	19.8
0.710000	51.23	---	87.00	35.77	1000.0	9.000	Single Line	19.8
1.422000	---	39.28	74.00	34.72	1000.0	9.000	Single Line	20.1
1.422000	45.92	---	87.00	41.08	1000.0	9.000	Single Line	20.1
16.186000	---	38.64	74.00	35.36	1000.0	9.000	Single Line	19.8
16.186000	46.42	---	87.00	40.58	1000.0	9.000	Single Line	19.8
22.530000	---	42.88	74.00	31.12	1000.0	9.000	Single Line	20.2
22.530000	45.93	---	87.00	41.07	1000.0	9.000	Single Line	20.2


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

**[1 000 Mbps]**

**Common Information**

Test Description:	Telecommunication Emission
Model No.:	TNM-C4940TD
Mode :	PoE
Speed :	1 000 Mbps
Operator Name:	KES

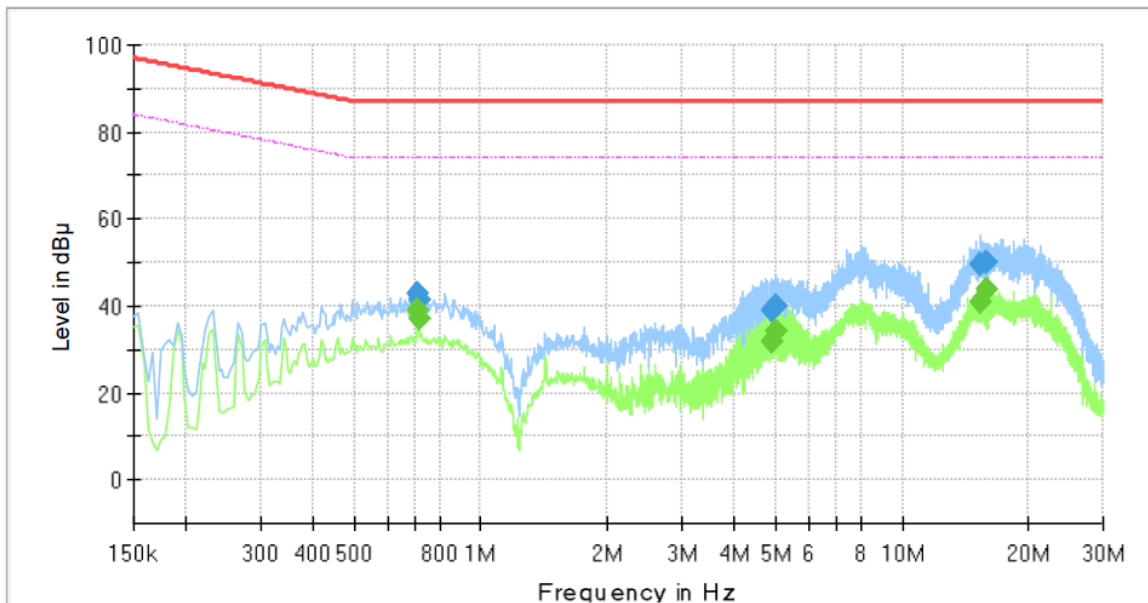

**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.710000	---	38.79	74.00	35.21	1000.0	9.000	Single Line	19.8
0.710000	42.60	---	87.00	44.40	1000.0	9.000	Single Line	19.8
0.714000	---	36.97	74.00	37.03	1000.0	9.000	Single Line	19.8
0.714000	41.25	---	87.00	45.75	1000.0	9.000	Single Line	19.8
4.910000	---	31.80	74.00	42.20	1000.0	9.000	Single Line	19.5
4.910000	38.85	---	87.00	48.15	1000.0	9.000	Single Line	19.5
4.986000	---	34.37	74.00	39.63	1000.0	9.000	Single Line	19.5
4.986000	39.76	---	87.00	47.24	1000.0	9.000	Single Line	19.5
15.346000	---	40.85	74.00	33.15	1000.0	9.000	Single Line	19.8
15.346000	49.42	---	87.00	37.58	1000.0	9.000	Single Line	19.8
15.914000	---	43.62	74.00	30.38	1000.0	9.000	Single Line	19.8
15.914000	49.83	---	87.00	37.17	1000.0	9.000	Single Line	19.8

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

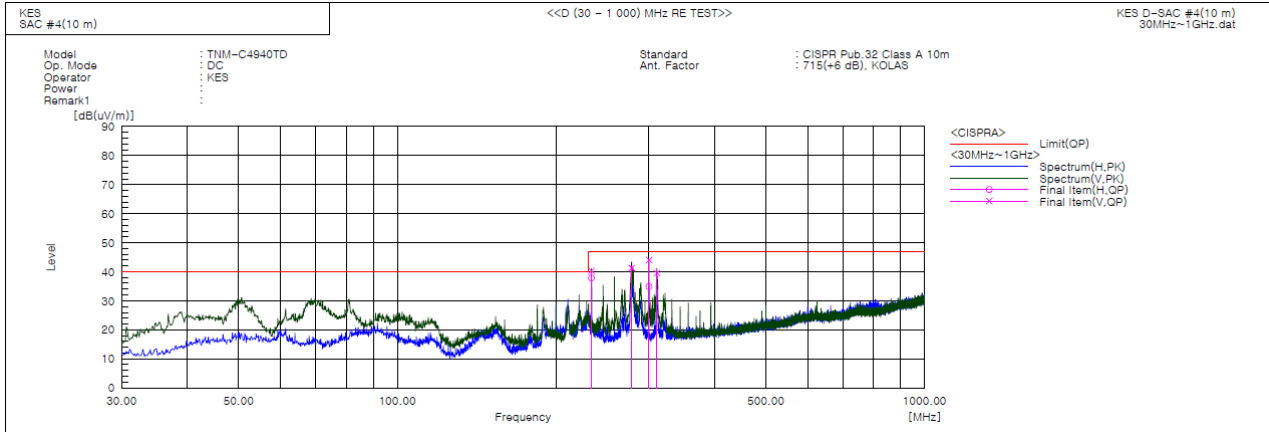


### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	233.458	V	60.2	-19.9	40.3	47.0	6.7	112.0	156.0	
2	233.462	H	57.8	-19.9	37.9	47.0	9.1	379.0	270.0	
3	278.199	V	60.0	-18.7	41.3	47.0	5.7	100.0	210.0	
4	300.024	V	62.1	-18.0	44.1	47.0	2.9	123.0	225.0	
5	300.029	H	52.9	-18.0	34.9	47.0	12.1	245.0	316.0	
6	310.573	V	57.0	-17.4	39.6	47.0	7.4	146.0	171.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

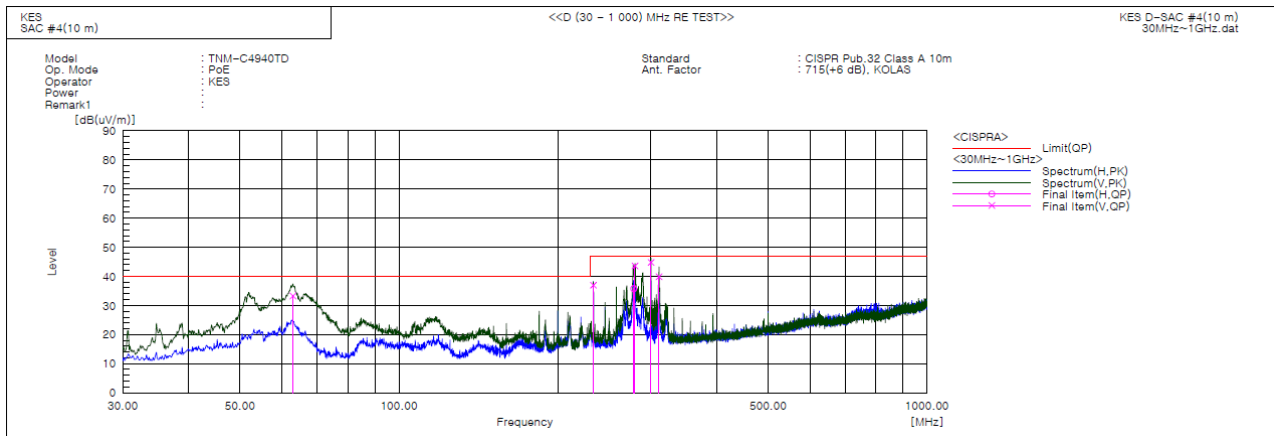

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	62.980	V	56.0	-22.7	33.3	40.0	6.7	112.0	241.0	
2	233.458	V	56.9	-19.9	37.0	47.0	10.0	156.0	173.0	
3	278.199	H	54.5	-18.7	35.8	47.0	11.2	363.0	18.0	
4	279.775	V	62.2	-18.6	43.6	47.0	3.4	117.0	196.0	
5	300.024	V	62.8	-18.0	44.8	47.0	2.2	145.0	173.0	
6	310.815	V	57.3	-17.4	39.9	47.0	7.1	100.0	181.0	

◆ Calculation

$$\text{Result(QP)} [\text{dB}(\mu\text{V}/\text{m})] = (\text{Reading(QP)}[\text{dB}(\mu\text{V})] + \text{c.f}[\text{dB}(1/\text{m})])$$

$$\text{Margin(QP)}[\text{dB}] = \text{Limit}[\text{dB}(\mu\text{V}/\text{m})] - \text{Result(QP)} [\text{dB}(\mu\text{V}/\text{m})]$$

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

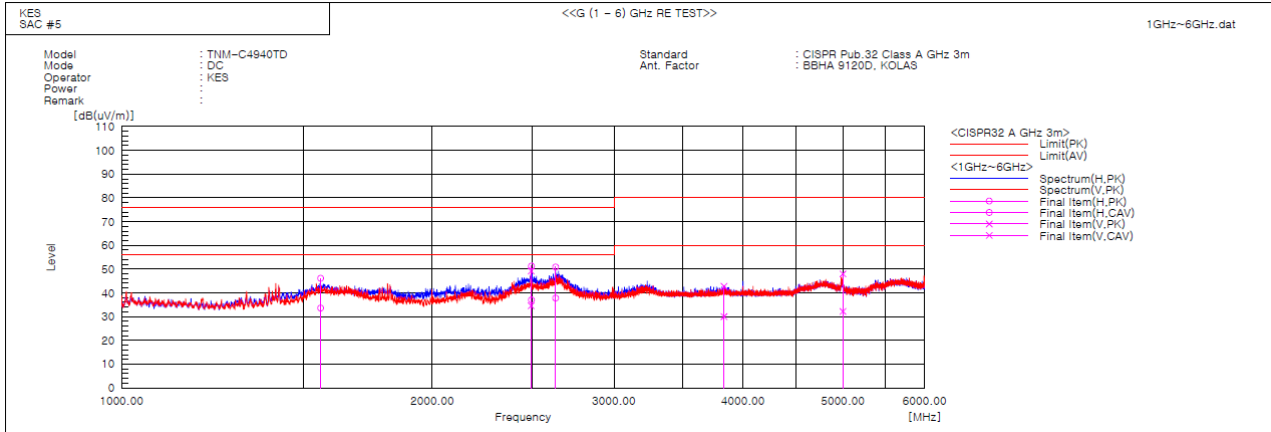

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2493.125	V	50.3	35.7	-1.1	49.2	34.6	76.0	56.0	26.8	21.4	100.0	288.5	
2	3835.000	V	40.2	27.4	2.6	42.8	30.0	80.0	60.0	37.2	30.0	100.0	207.0	
3	1558.750	H	50.8	38.3	-4.7	46.1	33.6	76.0	56.0	29.9	22.4	100.0	192.9	
4	2633.125	H	51.3	38.2	-0.4	50.9	37.8	76.0	56.0	25.1	18.2	100.0	176.4	
5	4998.750	V	41.1	25.3	6.9	48.0	32.2	80.0	60.0	32.0	27.8	100.0	96.6	
6	2495.625	H	52.4	38.1	-1.1	51.3	37.0	76.0	56.0	24.7	19.0	100.0	52.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Report No.:  
 KES-EM-22T0308  
 Page (24) of (45)

■ PoE Mode

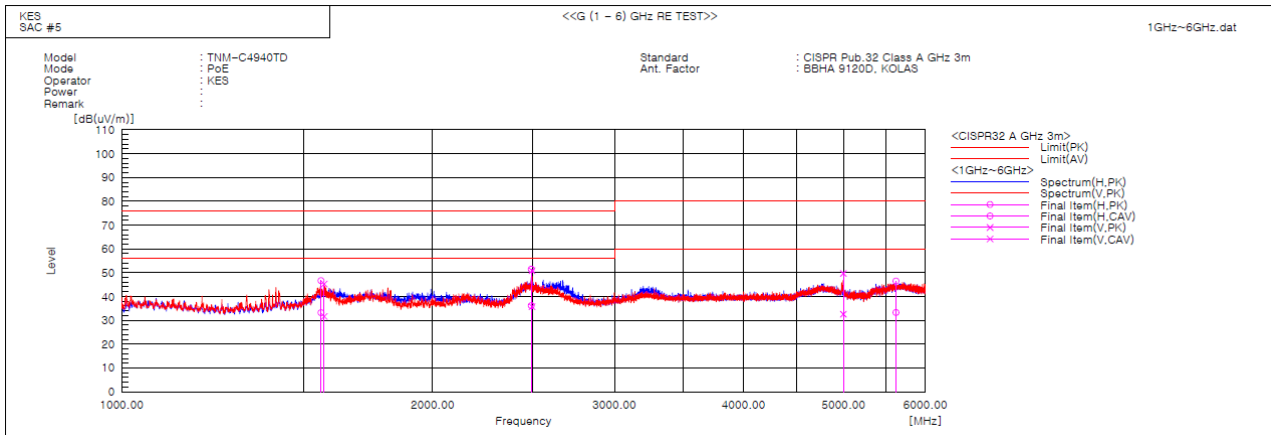

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1559.375	H	51.4	37.9	-4.7	46.7	33.2	76.0	56.0	29.3	22.8	100.0	208.0	
2	1570.625	V	50.0	36.4	-4.7	45.3	31.7	76.0	56.0	30.7	24.3	100.0	315.4	
3	2491.875	H	52.6	37.3	-1.1	51.5	36.2	76.0	56.0	24.5	19.8	100.0	263.5	
4	2496.250	V	52.0	36.9	-1.1	50.9	35.8	76.0	56.0	25.1	20.2	100.0	276.4	
5	4996.250	V	42.8	25.7	6.9	49.7	32.6	80.0	60.0	30.3	27.4	100.0	82.7	
6	5620.000	H	38.4	25.2	8.1	46.5	33.3	80.0	60.0	33.5	26.7	100.0	341.9	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



---

## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports

#### ■ DC Mode



---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Conducted Emissions at Telecommunication Ports

### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

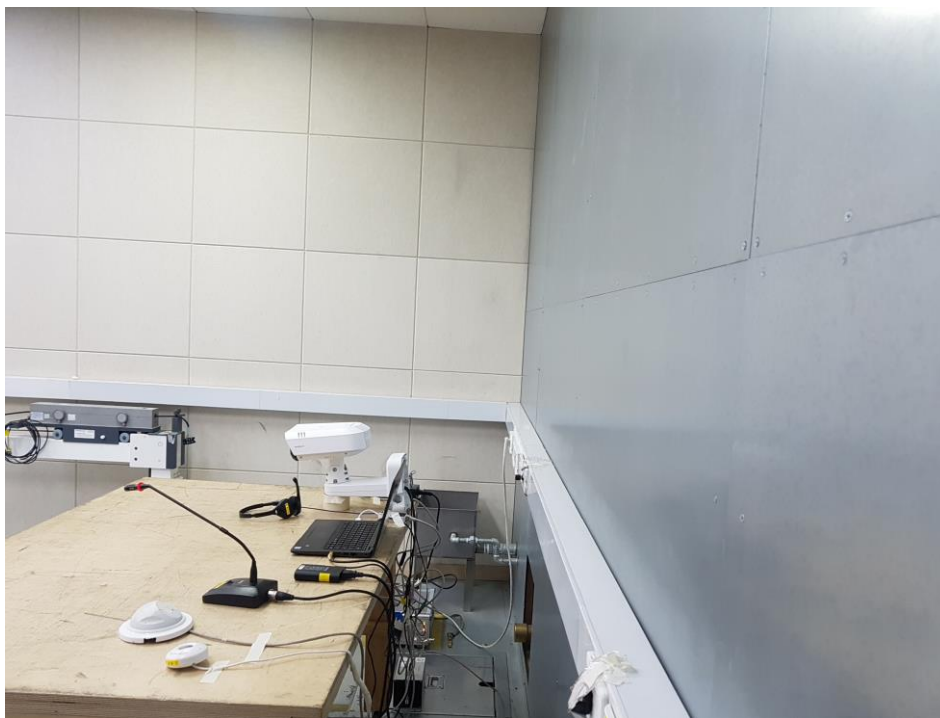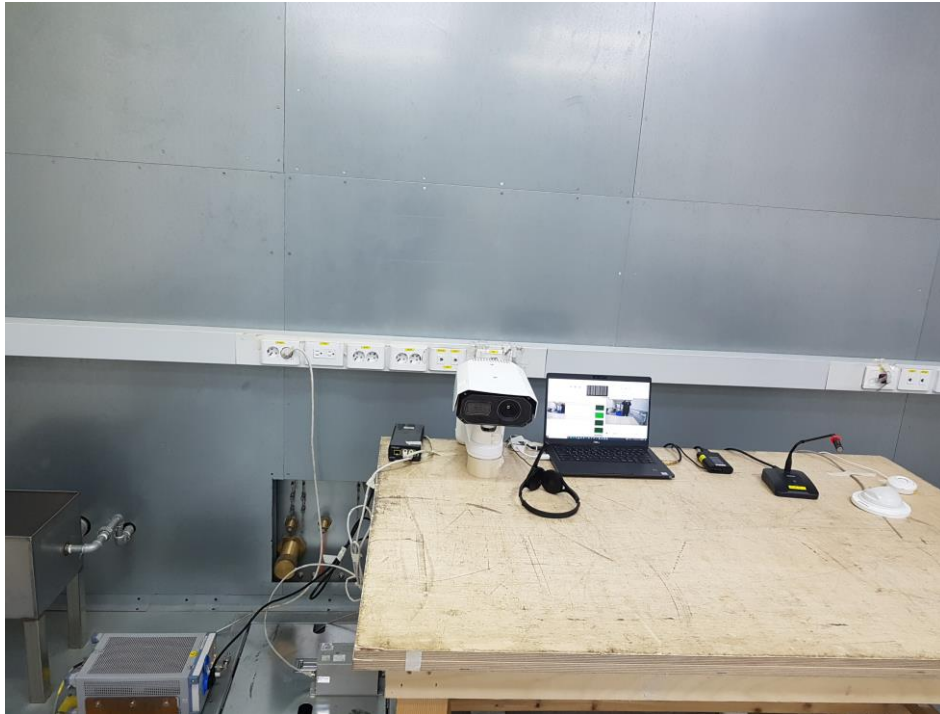

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

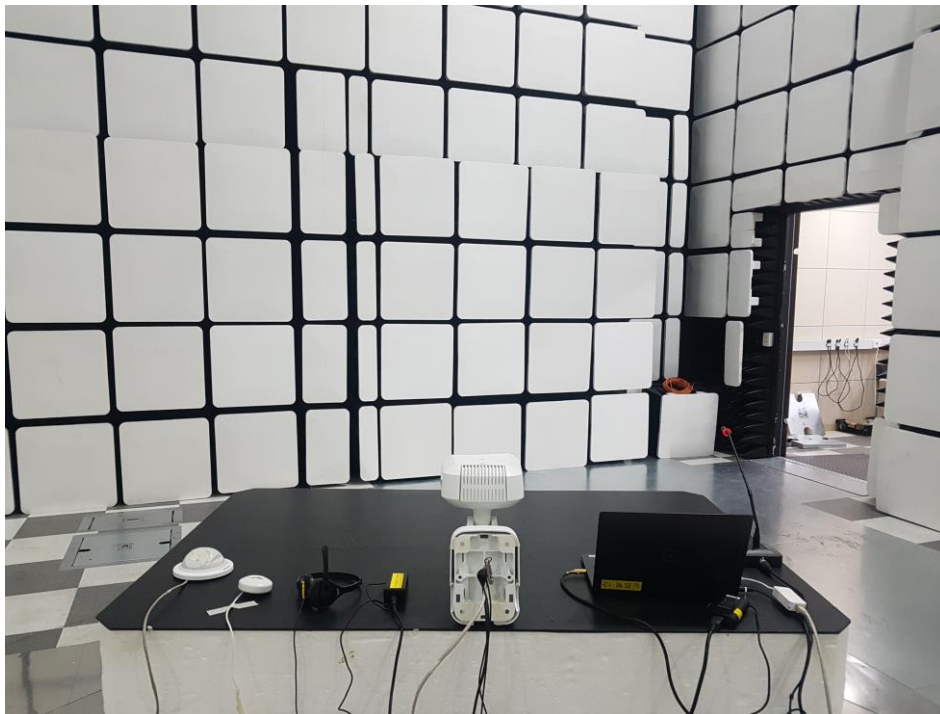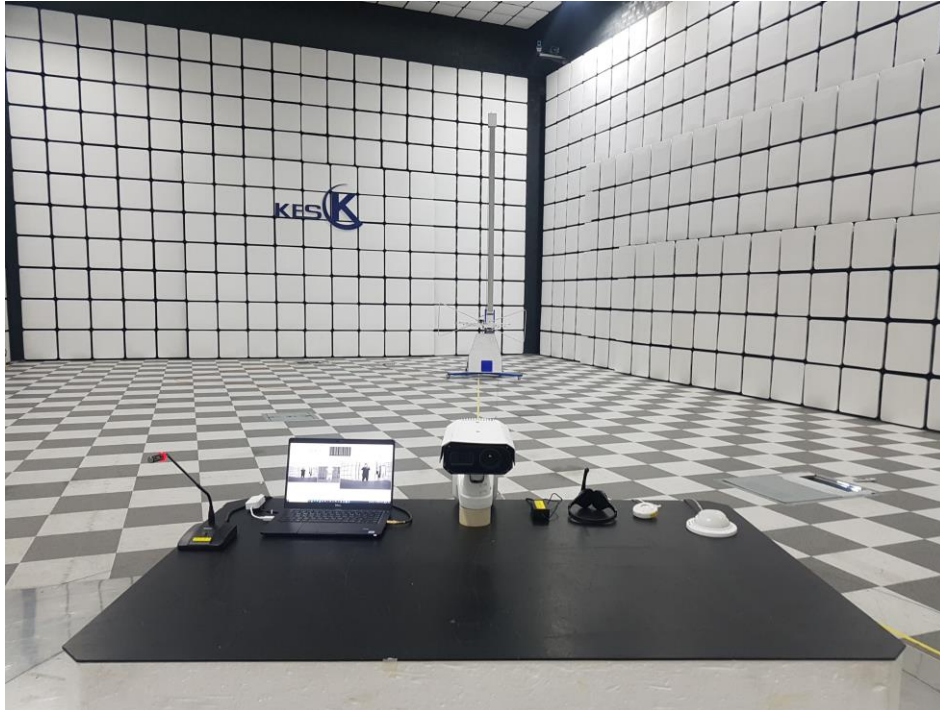

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode

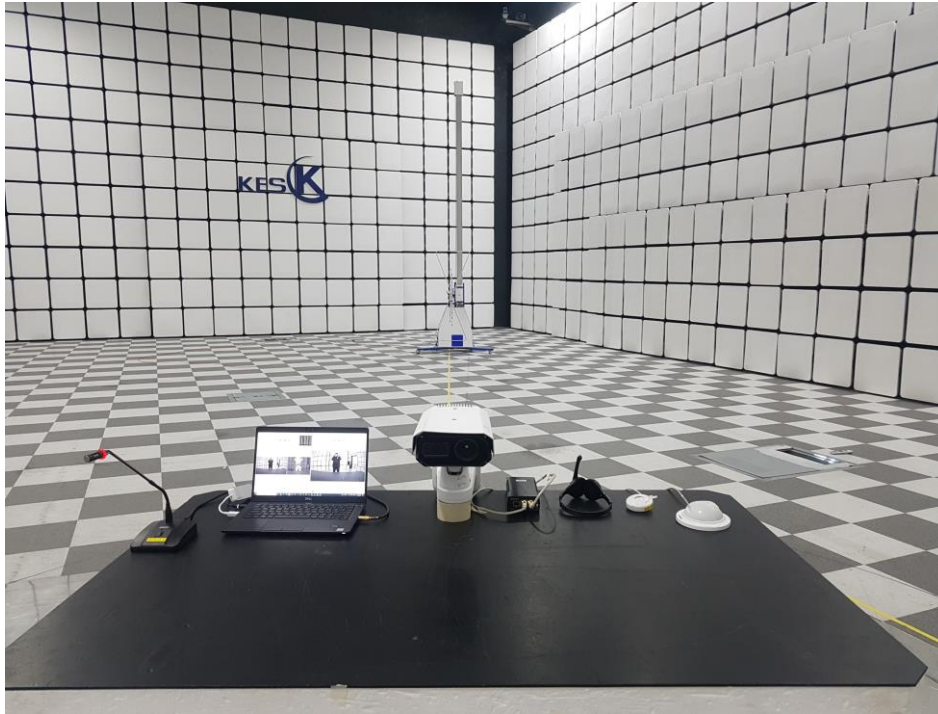

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

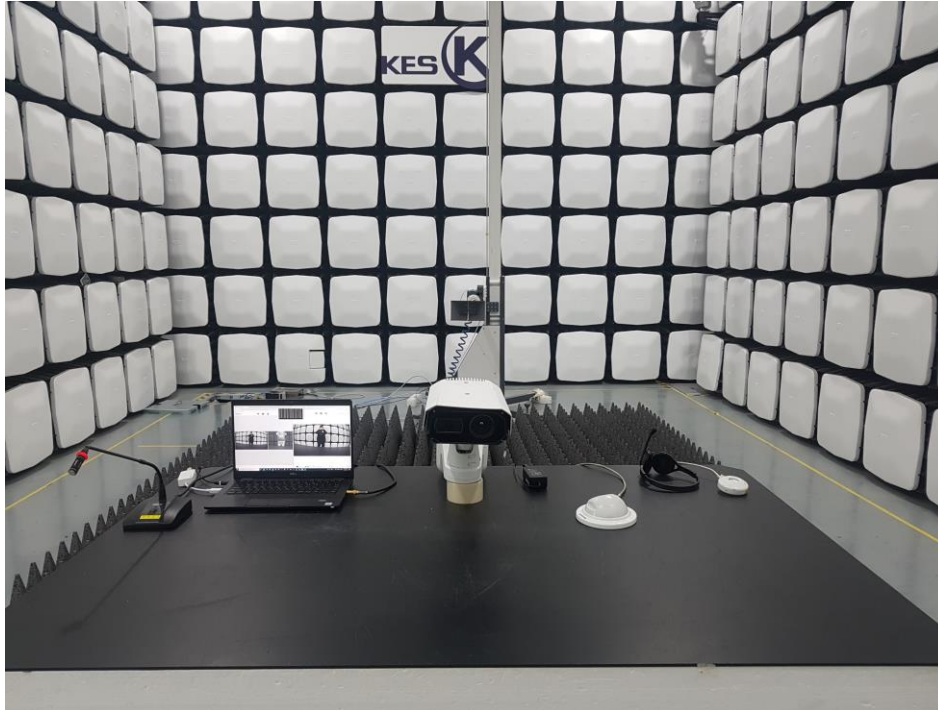

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

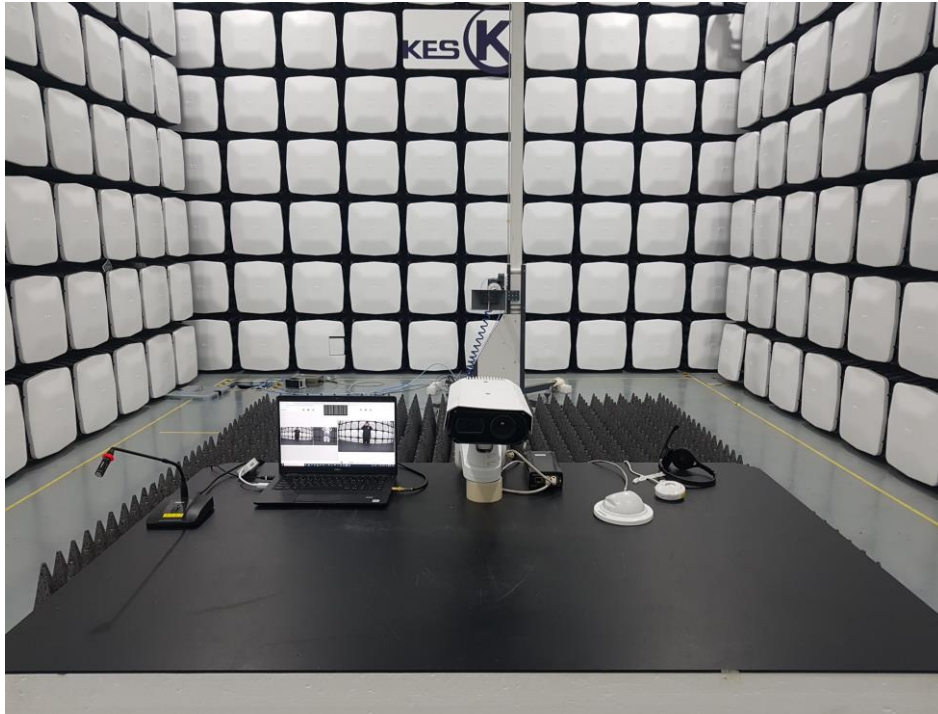

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

---

## EUT External Photographs

(Top)



(Bottom)



---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## EUT Internal Photographs

(Internal View)




---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 1

(Top)

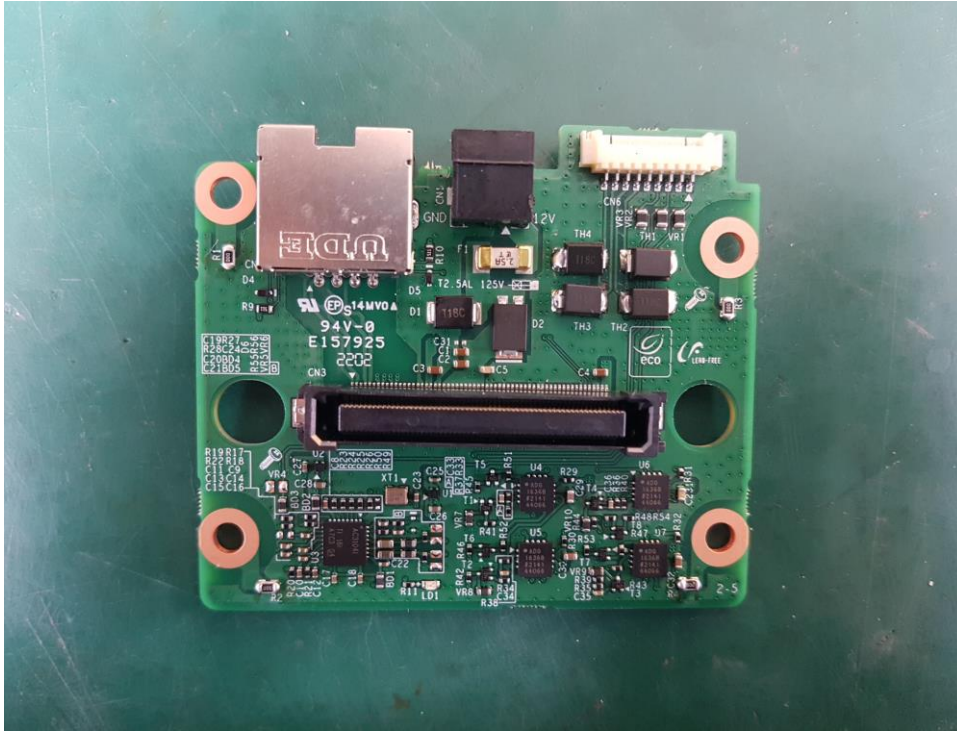


(Bottom)

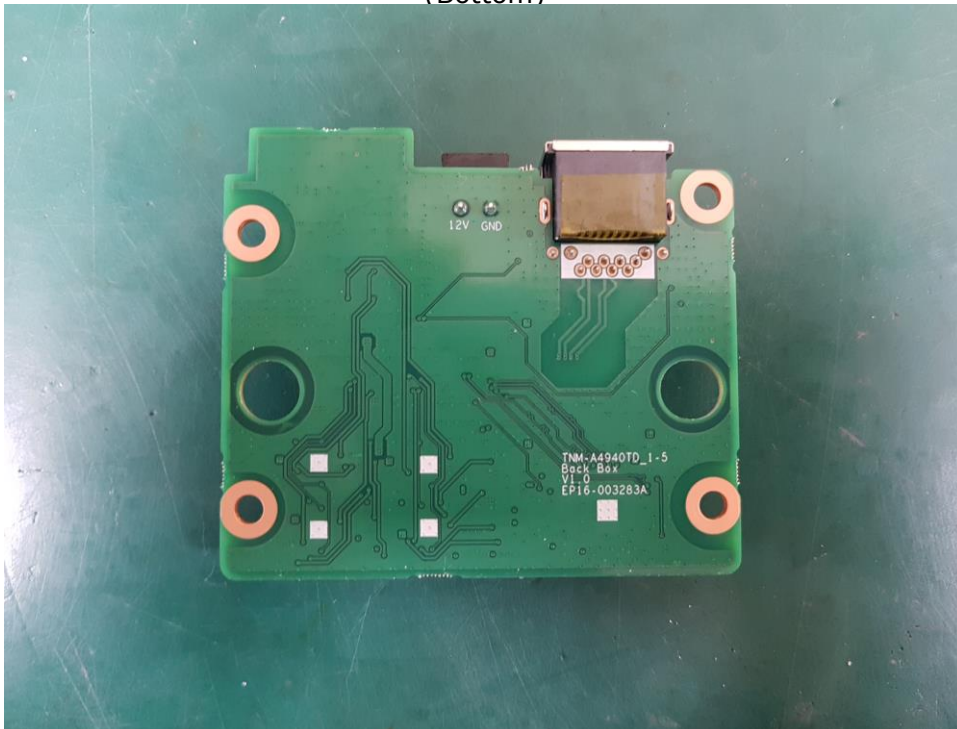

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 2

(Top)

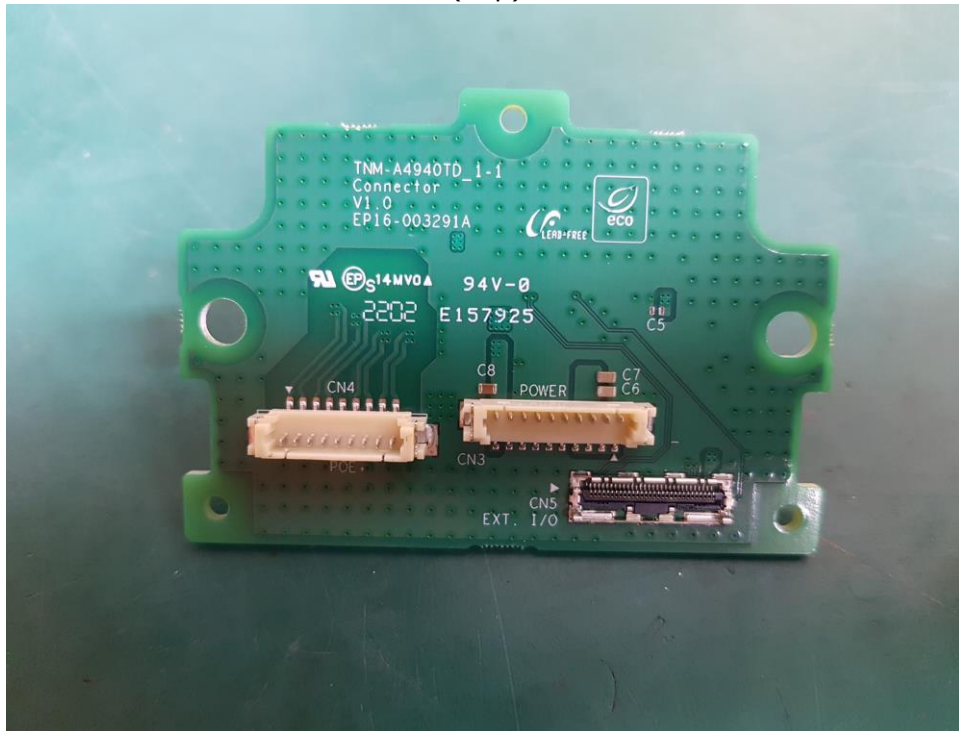


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### EUT Internal View – Board 3

(Top)

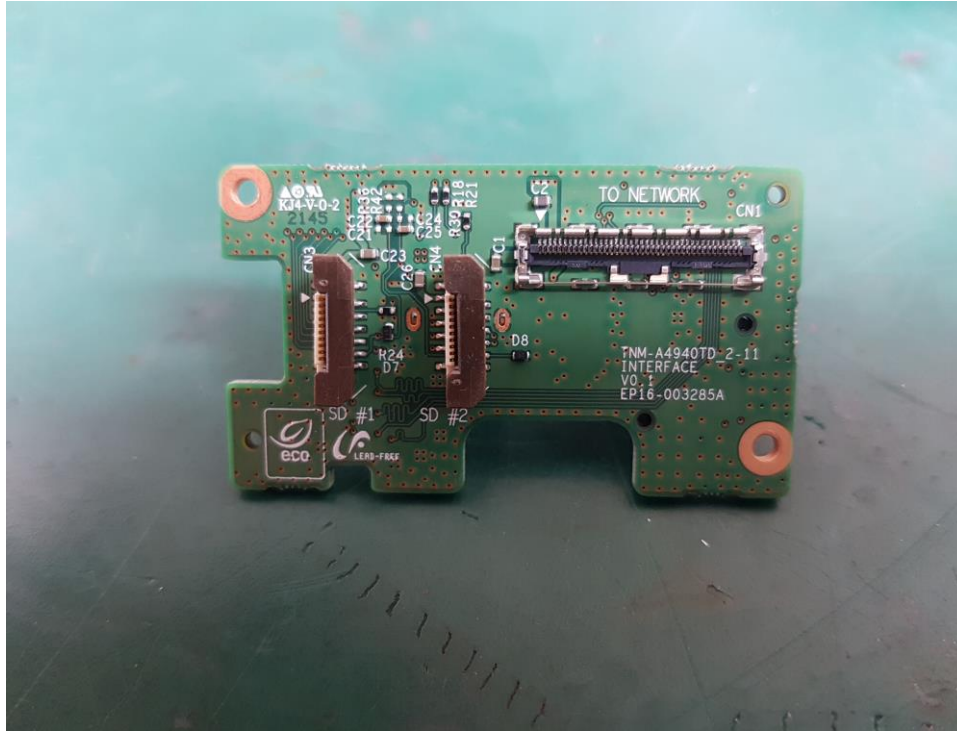

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 4

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 5

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 6

(Top)

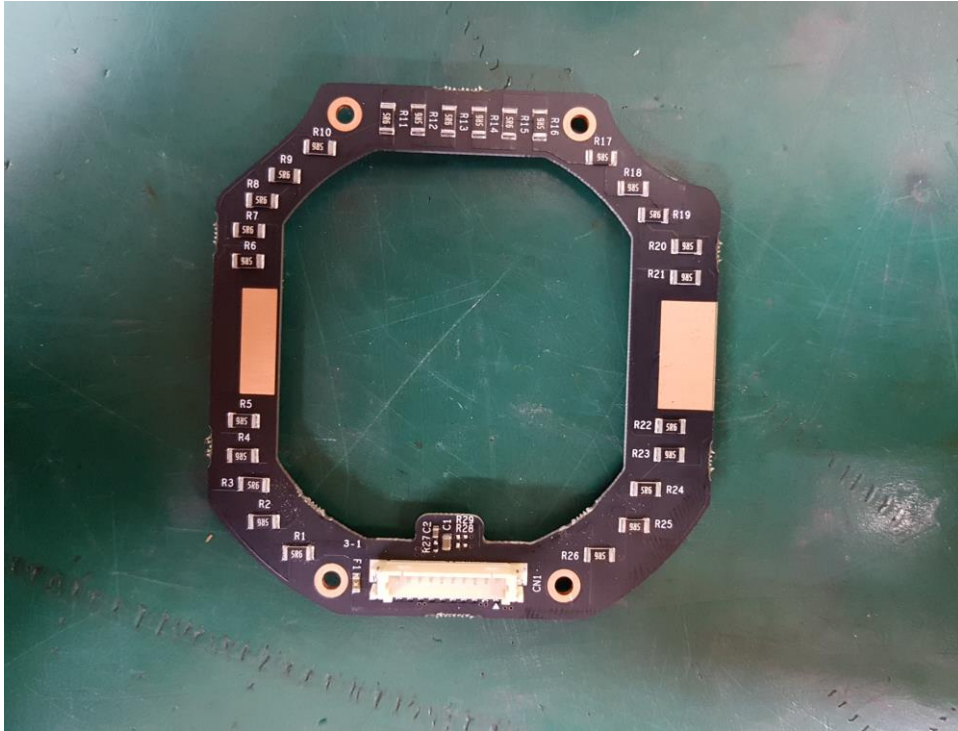

(Bottom)

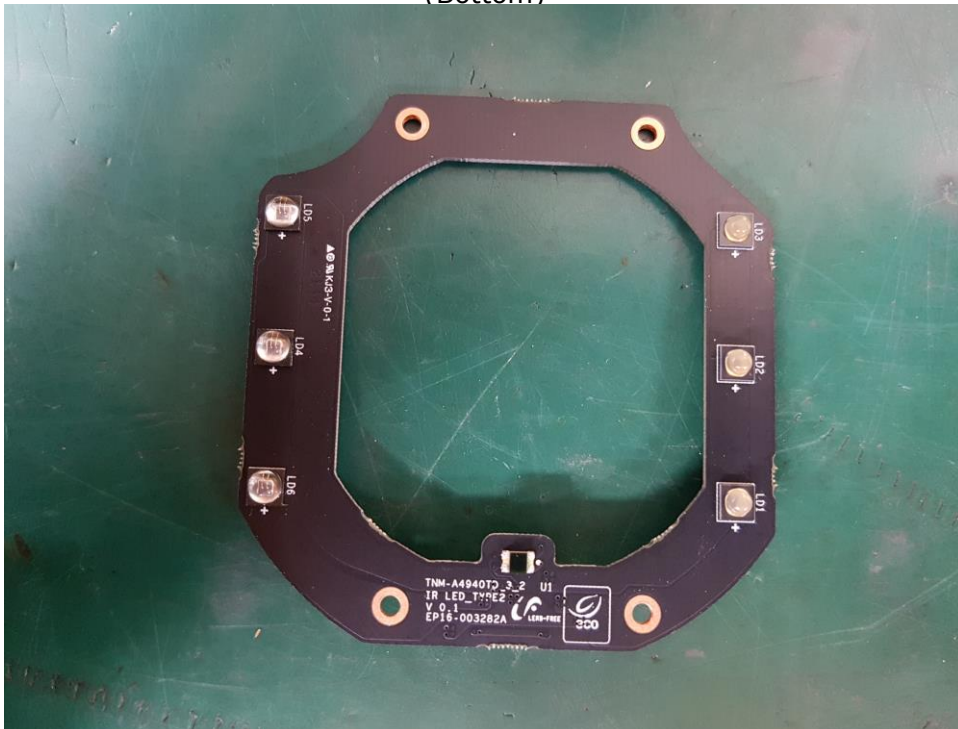

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 7

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## EUT Internal View – Board 8

(Top)

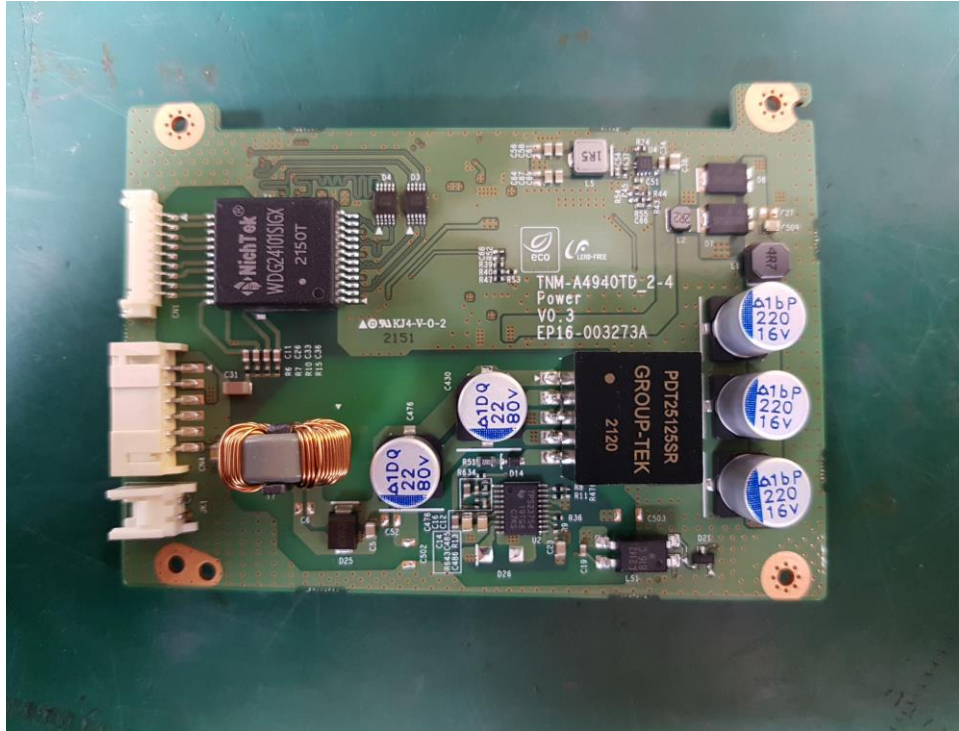

(Bottom)

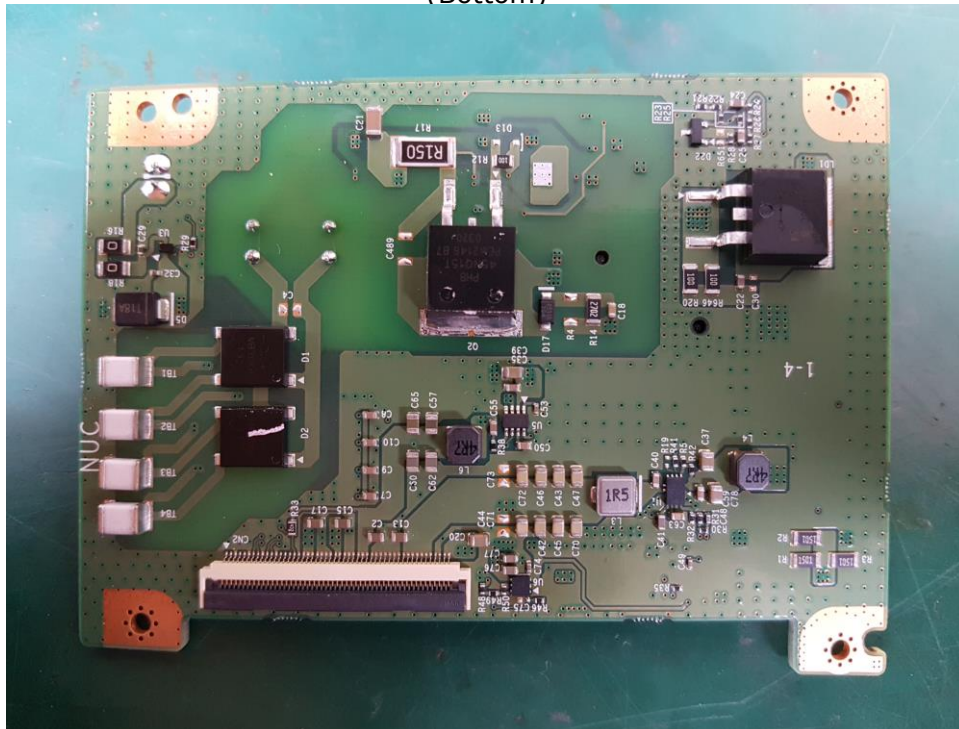


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 9

(Top)



(Bottom)

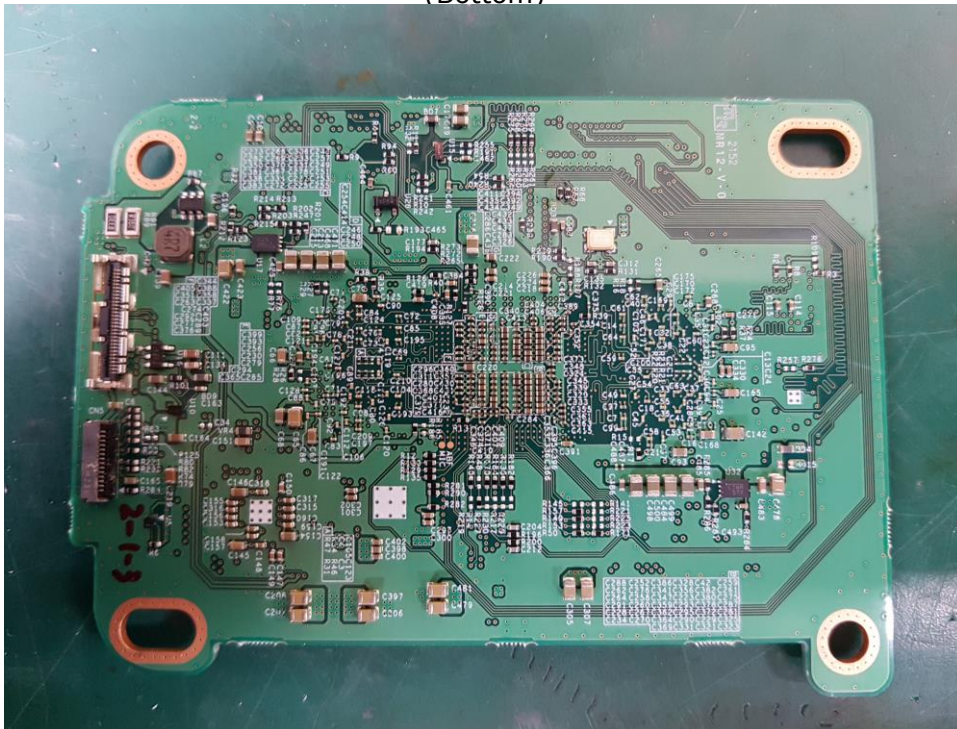


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 10

(Top)




(Bottom)

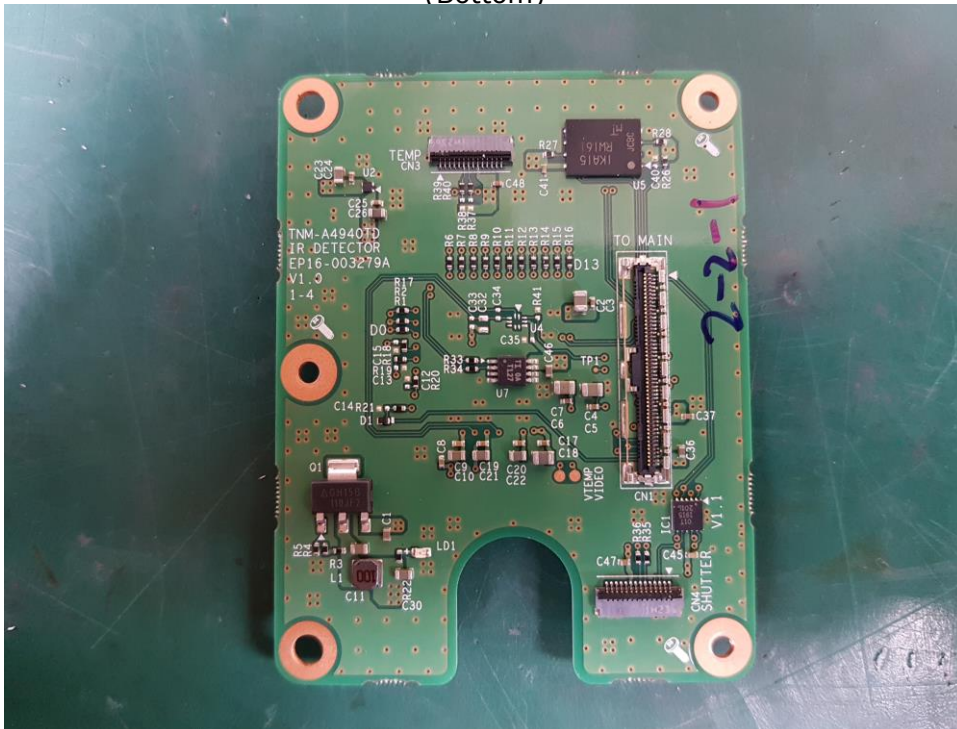


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Lens 1

(Top)

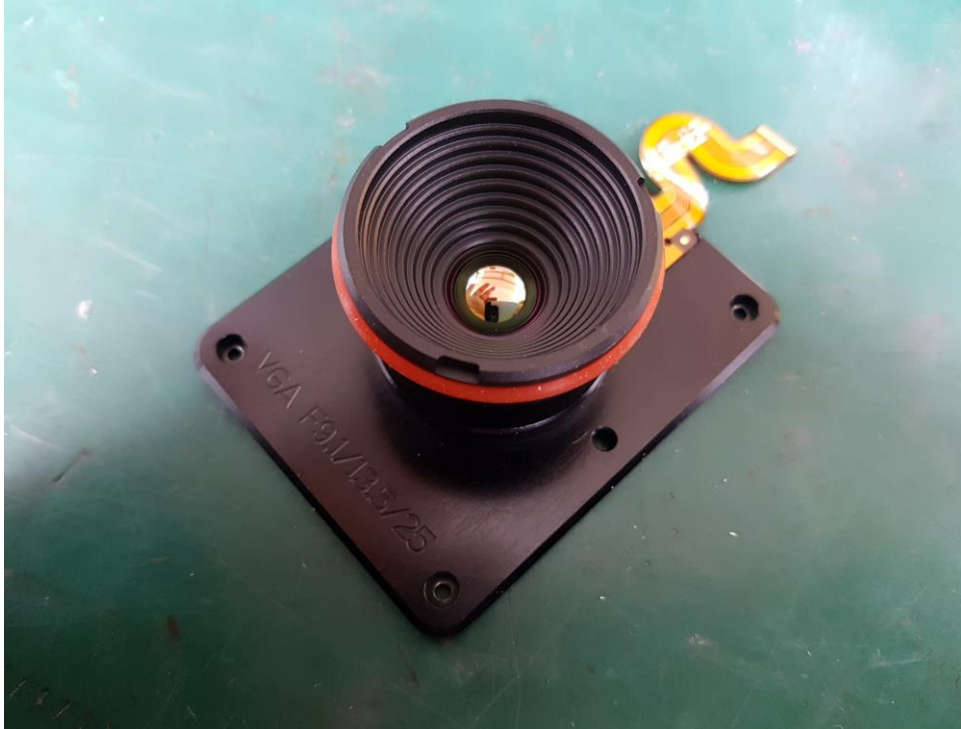

(Bottom)

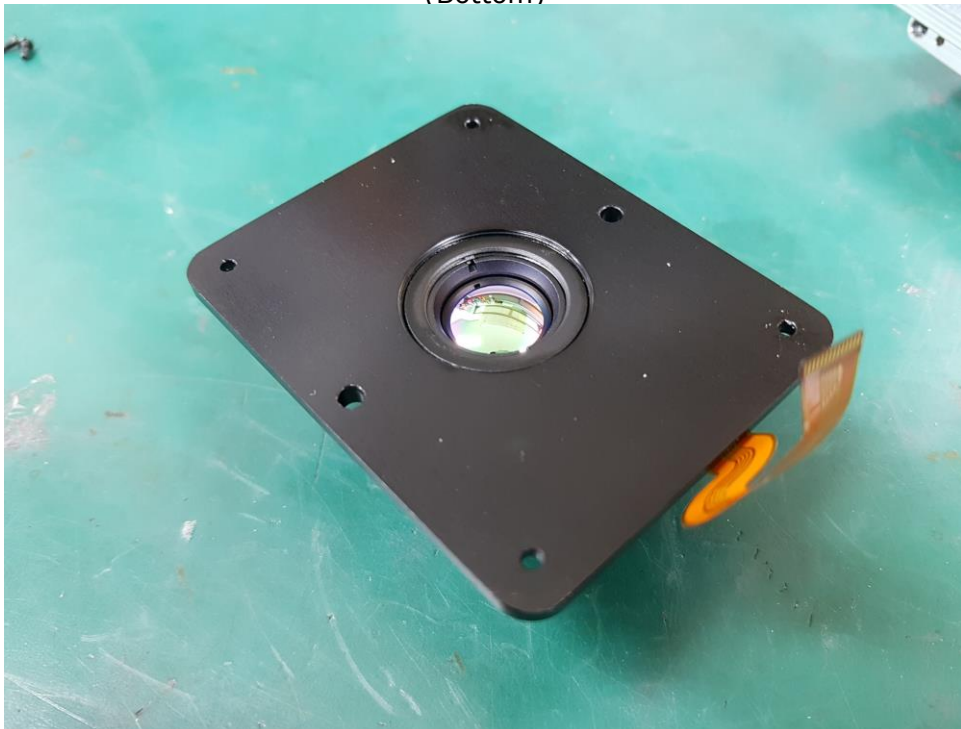


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Lens 2

(Top)



(Bottom)

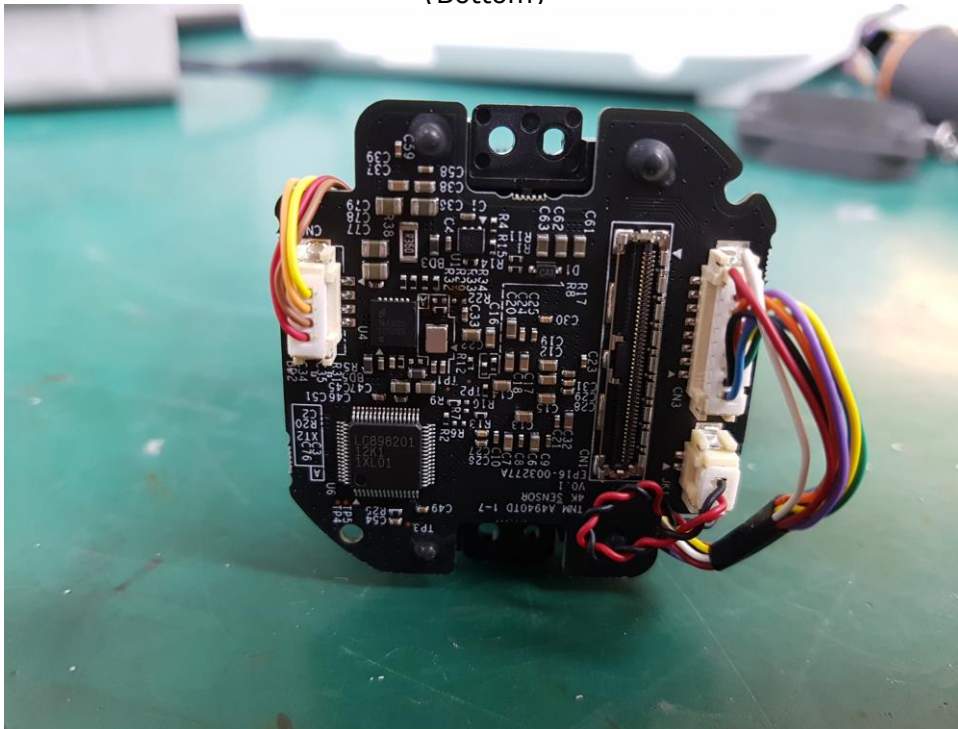

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr