



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0302
Page (1) of (47)

EMC TEST REPORT

Test Report No. : KES-EM-22T0302
Date of Issue : Apr. 01, 2022
Product name : THERMAL CAMERA
Model/Type No. : TNM-C4960TD
Variant Model : TNM-C4950TD
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Mar. 11, 2022
Test date : Mar. 17, 2022
Test Results : **In Compliance** **Not in Compliance**

Tested by

Min Seong, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0302
Page (2) of (47)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 01, 2022	KES-EM-22T0302	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
	Conducted Emissions at Mains Power Ports.....	17
	Radiated Electric Field Emissions(Below 1 GHz)	21
	Radiated Electric Field Emissions(Above 1 GHz)	25
	Test Setup Photos and Configuration	27
	Conducted Emissions at Mains Power Ports.....	27
	Radiated Electric Field Emissions(Below 1 GHz)	29
	Radiated Electric Field Emissions(Above 1 GHz)	31
	EUT External Photographs	33
	EUT Internal Photographs	34



1.0 General Product Description

Main Specifications of EUT are:

Video		
Imaging Device	Uncooled micro bolometer	1/1.8" CMOS
Resolution	1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360	3840x2160, 3072x1728, 2592x1944, 2688x1520, 2560x1440, 2048x1536, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.265/H.264: Max. 30fps MJPEG: Max. 3fps	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 1fps/1fps(60Hz/50Hz)
NETD	< 60mK	None
Pixel Size	12µm	None
Min. Illumination	None	Color: 0.06Lux(F1.7, 1/30sec) BW: 0.005Lux(F1.7, 1/30sec)
Video Out	USB : Micro USB Type B	
Lens		
Focal Length (Zoom Ratio)	25mm fixed focal	10.9~29mm(2.6x) motorized varifocal
Max. Aperture Ratio	F1.0	F1.7(Wide)~F1.73(Tele)
Angular Field of View	H: 17.4°, V: 13.1°, D: 21.6°	H:42.0°(Wide)~15.0°(Tele) / V:22.8°(Wide)~8.4°(Tele) / D:48.7°(Wide)~17.1°(Tele)
Min. Object Distance	26m(85.30ft)	Wide: 2.5m(8.20ft) / Tele: 6m(19.68ft)
Focus Control	Fixed	Simple focus
Lens Type	None	
Mount Type	None	
Optional Lens	None	
Pan / Tilt / Rotate		
Pan / Tilt / Rotate Range	None	
Pan Range	None	
Pan Speed	None	
Tilt Range	None	
Tilt Speed	None	
Rotate Range	None	
Sequence	None	
Preset Accuracy	None	
Operational		
Camera Title	Displayed up to 85 characters	
Direction Indicator	None	None
Day & Night	None	Auto(ICR)
Backlight Compensation	None	BLC, WDR, SDR
Wide Dynamic Range	None	WDR(120dB)
Digital Noise Reduction	None	SSNR V, WiseNR II
Digital Image Stabilization	None	Support(built-in gyro sensor)
Motion Detection		
Privacy Masking	6ea, rectangle zones - Color: Gray/Black/White	
Gain Control	None	Low / Middle / High
White Balance	None	ATW / AWC / Manual / Indoor / Outdoor
LDC	None	Support
Electronic Shutter Speed	None	Minimum / Maximum / Anti flicker(1/5~1/12,000sec) Auto prefer shutter control(Based on AI engine)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0302
 Page (5) of (47)

Analytics	- Analytics events : Directional detection, Motion detection, Enter/Exit, Virtual line, Temperature Change detection	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle(car/truck/bus/bicycle/motorcycle)/License plate), Bestshot, IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion), Stopped vehicle, Traffic jam - Analytics events : Defocus detection, Motion detection, Tampering, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	None	None
Alarm I/O	4 configurable I/O ports	
Alarm Triggers	Analytics, Network disconnect, Alarm input	
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback	
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm	
Audio Out	Line out, Max.output level: 1Vrms	
IR Viewable Length	None	None
Color Palettes	Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom	None
Network		
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)	
Video Compression	H.265/H.264: Main/High, MJPEG	
Audio Compression	G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz	
Smart Codec	WiseStreamII	Manual(Sea area), WiseStreamIII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control	
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	
Streaming	Unicast(6 users) / Multicast Multiple streaming(Up to 3 profiles)	
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)	
Security	TPM 2.0 (FIPS 140-2 level 2) HTTPS(SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device certificate(Hanwha Techwin Root CA, pre-installed) Secure boot, Secure firmware	
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API) Wisenet open platform (visible channel only)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0302
 Page (6) of (47)

General		
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Swedish, Japanese, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	
Edge Storage	Micro SD/SDHC/SDXC 2slots 512GB	
Memory	4GB RAM, 512MB FLASH	
Environmental & Electrical		
Operating Temperature / Humidity	-40°C to +60°C(-58°F to +140°F) * Start up should be done at above -30°C less than 95% RH(non-condensing)	
Storage Temperature / Humidity	-50°C to +60°C(-58°F to +140°F) / Less than 95% RH(Non-condensing)	
Certification	IP66/IP67, IK10, NEMA4X, NEMA TS 2(2.2.8, 2.2.9)	
Input Voltage	PoE+(IEEE802.3at, Class4), 12V _{DC}	
Power Consumption	PoE+ : Max 23.5W 12V _{DC} : Max 19.5W	
Mechanical		
Color / Material	White / Aluminum	
RAL Code	RAL9003	
Product Dimensions / Weight	353.4 * 287.5 * 191.2mm (13.92 * 11.32 * 7.53in) / 4.533kg	
DORI (EN62676-4 standard)		
Detect (25PPM/ 8PPF)	None	Wide: 51.7m(169.94ft) / Tele: 174.5m(572.64ft)
Observe (63PPM/ 19PPF)	None	Wide: 20.7m(67.85ft) / Tele: 69.8m(229.06ft)
Recognize (125PPM/ 38PPF)	None	Wide: 10.3m(33.93ft) / Tele: 34.9m(114.53ft)
Identify (250PPM/ 76PPF)	None	Wide: 5.2m(16.96ft) / Tele: 17.5m(57.26ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

- AC 120 V, 60 Hz (DC Adapter Input Power)
- AC 120 V, 60 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Addition of derivative models for place of sale management

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THERMAL CAMERA	TNM-C4960TD	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0302
Page (8) of (47)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adapter	2ACB022F	-	ChAnnel Well Technology (Guangzhou) Co.,Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	LG15N54	507NZET040180	LG	-
Notebook Adapter	PA-1900-14	OF4A263348701J 247	LITE-ON TECHNOLOGY COPORATION	-
Micro SD Card 1	-	-	SanDisk	32 GB
Micro SD Card 2	-	-	SanDisk	16 GB
MIC	MP1000	-	-	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Smart Phone	SM-N950N	R39JB0C3FB	SAMSUNG	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	2 Pin	AC/DC Adapter	Line-Out (2 Pin)	1.0	U
	RJ-45	Notebook	RJ-45	3.0	S
	SLOT	Micro SD Card 1	SLOT	-	-
	SLOT	Micro SD Card 2	SLOT	-	-
	MIC (3.5 mm)	MIC	XLR	2.0	U
	Speaker (3.5 mm)	Speaker	Line-Out (3.5 mm)	1.6	U
	3 Pin	Alarm	Line-Out (3 Pin)	3.0	U
	3 Pin	Button Alarm	Line-Out (3 Pin)	3.0	U
Notebook	DC Jack	Notebook Adapter	Line-Out (DC Jack)	1.0	U
	3.5 mm	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.0	S
	SLOT	Micro SD Card 1	SLOT	-	-
	SLOT	Micro SD Card 2	SLOT	-	-
	MIC (3.5 mm)	MIC	XLR	2.0	U
	Speaker (3.5 mm)	Speaker	Line-Out (3.5 mm)	1.6	U
	3 Pin	Alarm	Line-Out (3 Pin)	3.0	U
	3 Pin	Button Alarm	Line-Out (3 Pin)	3.0	U
Notebook	RJ-45	PoE Adapter	RJ-45 (DATA)	1.0	S
	DC Jack	Notebook Adapter	Line-Out (DC Jack)	1.0	U
	3.5 mm	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test Mode	operating
Operation	<ul style="list-style-type: none"> - By connecting to the Web Viewer, checking the video output of EUT and performing a ping test, it was confirmed that the network function is operating normally. - After the test, the Micro SD Card was checked to see if it was recorded normally.


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

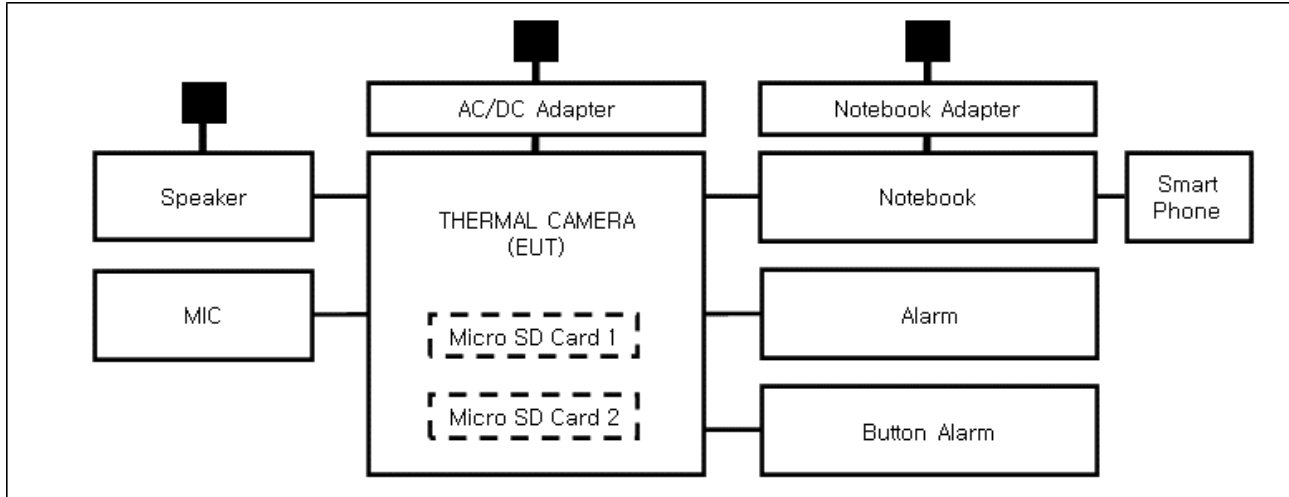

■ PoE Mode

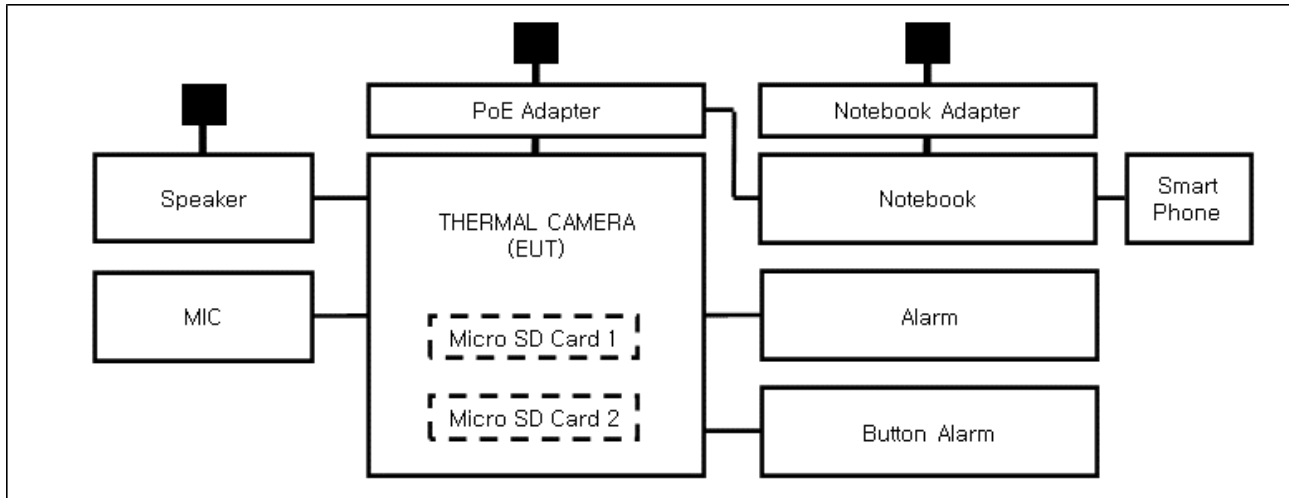

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

1.9 Remarks when standards applied

- USB Port was excluded from testing because it is the management port.
- PoE port is considered to be wired network port, so power-related test items are excluded.







1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



2.0 Test Regulations

The emissions tests were performed according to following regulations:

47 CFR Part 15, Subpart B

CISPR 22:2009 +A1:2010 Class A Class B

ANSI C63.4a-2017 Class A Class B

IC Regulation ICES-003 Issue 7

CAN/CSA-CISPR 32:17 Class A Class B

ANSI C63.4a-2017 Class A Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 17, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 27, 2022
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (24,6 ± 0,1) °C

Relative Humidity: (44,1 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0302
Page (15) of (47)

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 17, 2022

Test Location

OPEN AREA TEST SITE #2 SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (23,7 ± 0,2) °C
Relative Humidity: (44,3 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- PASS
 NOT PASS
 NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 17, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	04, 01, 2022
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

Test Conditions

Temperature: (25,3 ± 0,3) °C

Relative Humidity: (47,2 ± 0,5) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNM-C4960TD
Phase:	H
Mode:	DC
Operator Name:	KES

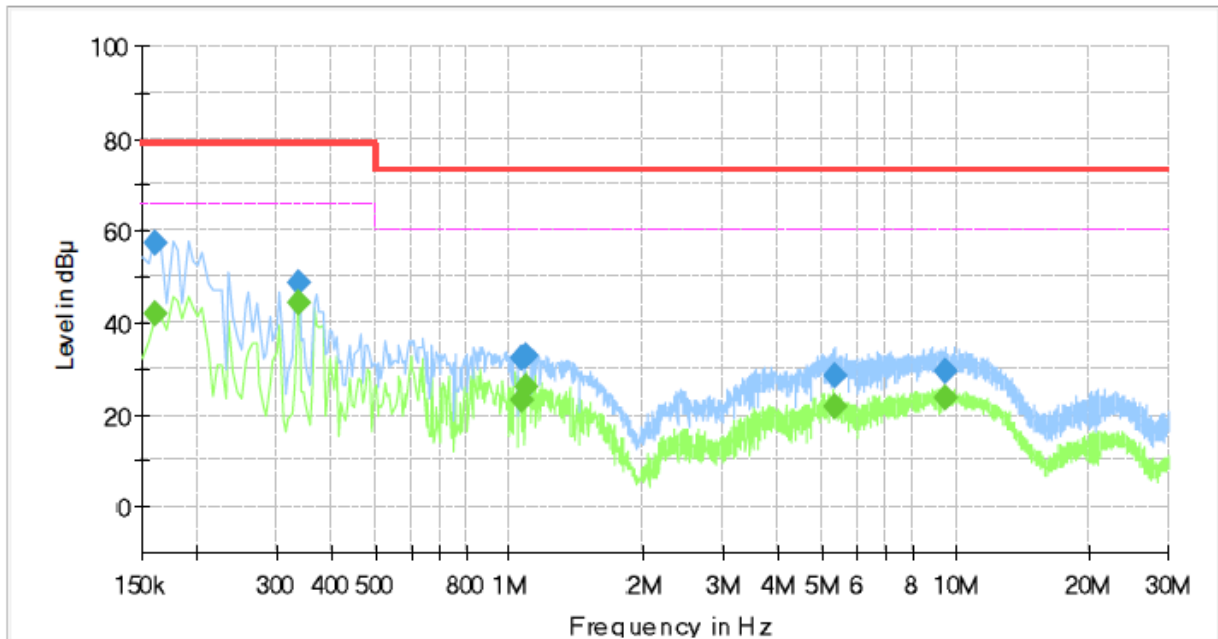

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	41.99	66.00	24.01	1000.0	9.000	L1	19.4
0.160000	57.01	---	79.00	21.99	1000.0	9.000	L1	19.4
0.335000	---	44.37	66.00	21.63	1000.0	9.000	L1	19.5
0.335000	48.44	---	79.00	30.56	1000.0	9.000	L1	19.5
1.070000	---	23.01	60.00	36.99	1000.0	9.000	L1	20.1
1.070000	32.42	---	73.00	40.58	1000.0	9.000	L1	20.1
1.090000	---	26.03	60.00	33.97	1000.0	9.000	L1	20.1
1.090000	32.60	---	73.00	40.40	1000.0	9.000	L1	20.1
5.345000	---	21.66	60.00	38.34	1000.0	9.000	L1	19.6
5.345000	28.64	---	73.00	44.36	1000.0	9.000	L1	19.6
9.455000	---	23.72	60.00	36.28	1000.0	9.000	L1	19.8
9.455000	29.57	---	73.00	43.43	1000.0	9.000	L1	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNM-C4960TD
Phase:	N
Mode:	DC
Operator Name:	KES

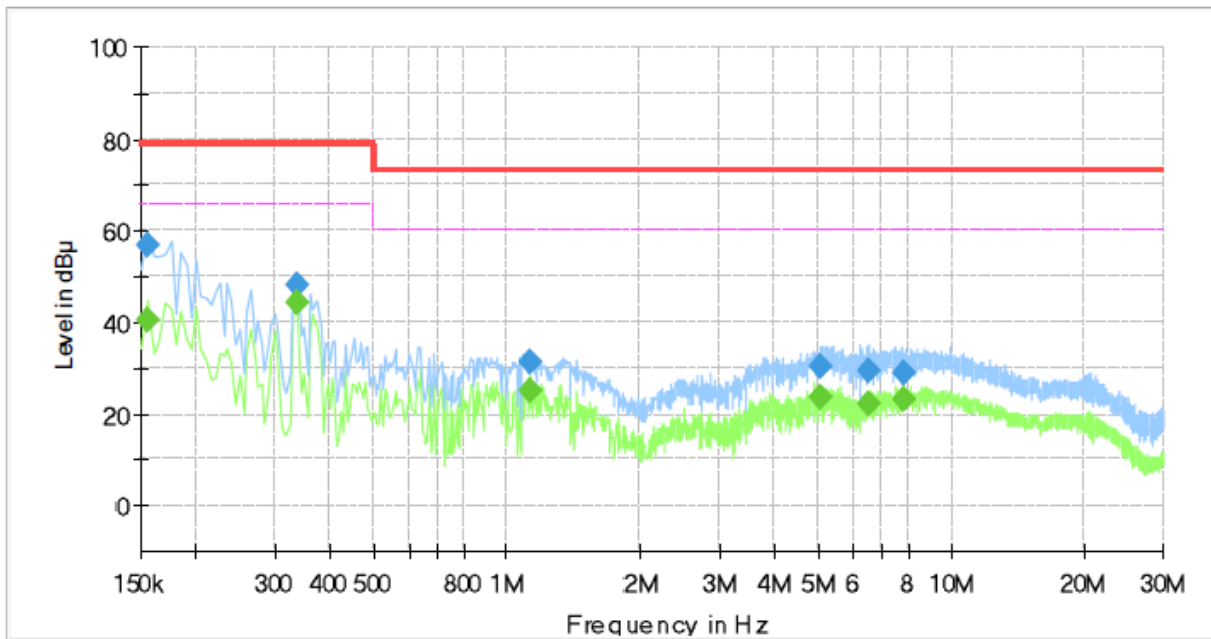

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	40.29	66.00	25.71	1000.0	9.000	N	19.4
0.155000	56.70	---	79.00	22.30	1000.0	9.000	N	19.4
0.335000	---	44.04	66.00	21.96	1000.0	9.000	N	19.5
0.335000	48.12	---	79.00	30.88	1000.0	9.000	N	19.5
1.125000	---	24.98	60.00	35.02	1000.0	9.000	N	20.1
1.125000	31.18	---	73.00	41.82	1000.0	9.000	N	20.1
5.090000	---	23.56	60.00	36.44	1000.0	9.000	N	19.6
5.090000	30.42	---	73.00	42.58	1000.0	9.000	N	19.6
6.515000	---	22.15	60.00	37.85	1000.0	9.000	N	19.5
6.515000	29.28	---	73.00	43.72	1000.0	9.000	N	19.5
7.850000	---	23.17	60.00	36.83	1000.0	9.000	N	19.6
7.850000	29.14	---	73.00	43.86	1000.0	9.000	N	19.6


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNM-C4960TD
Phase:	H
Mode:	PoE
Operator Name:	KES

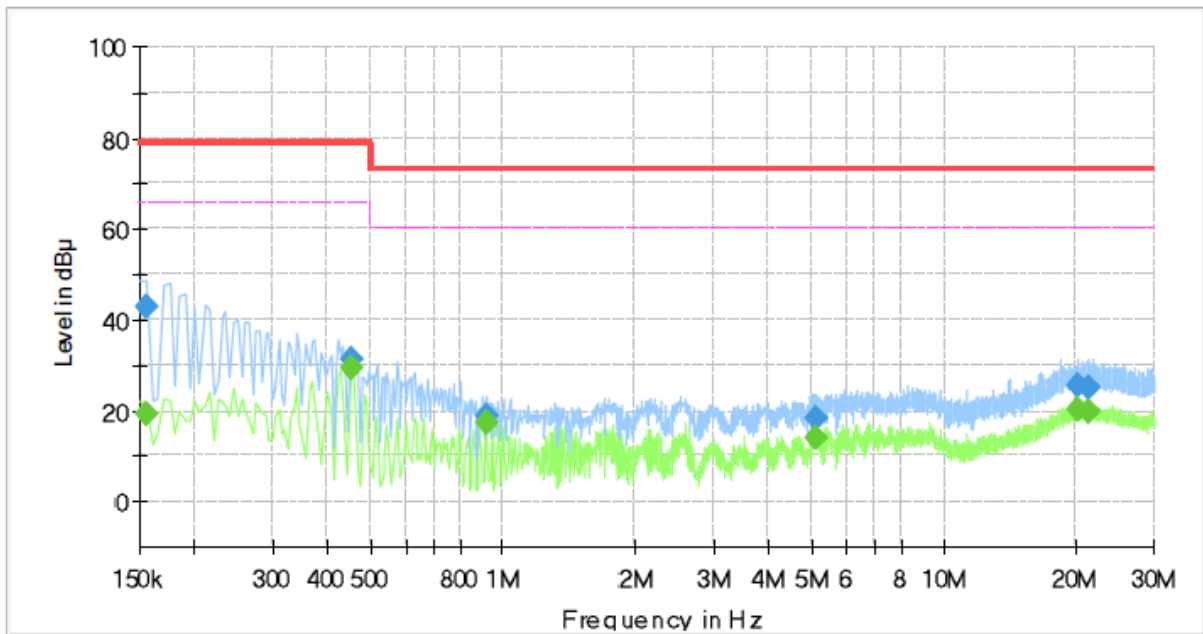

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	19.17	66.00	46.83	1000.0	9.000	L1	19.4
0.155000	42.99	---	79.00	36.01	1000.0	9.000	L1	19.4
0.455000	---	29.16	66.00	36.84	1000.0	9.000	L1	19.7
0.455000	31.30	---	79.00	47.70	1000.0	9.000	L1	19.7
0.915000	---	17.34	60.00	42.66	1000.0	9.000	L1	20.1
0.915000	19.06	---	73.00	53.94	1000.0	9.000	L1	20.1
5.120000	---	13.89	60.00	46.11	1000.0	9.000	L1	19.6
5.120000	18.35	---	73.00	54.65	1000.0	9.000	L1	19.6
20.185000	---	20.30	60.00	39.70	1000.0	9.000	L1	20.1
20.185000	25.42	---	73.00	47.58	1000.0	9.000	L1	20.1
21.210000	---	19.75	60.00	40.25	1000.0	9.000	L1	20.1
21.210000	24.89	---	73.00	48.11	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNM-C4960TD
Phase:	N
Mode:	PoE
Operator Name:	KES

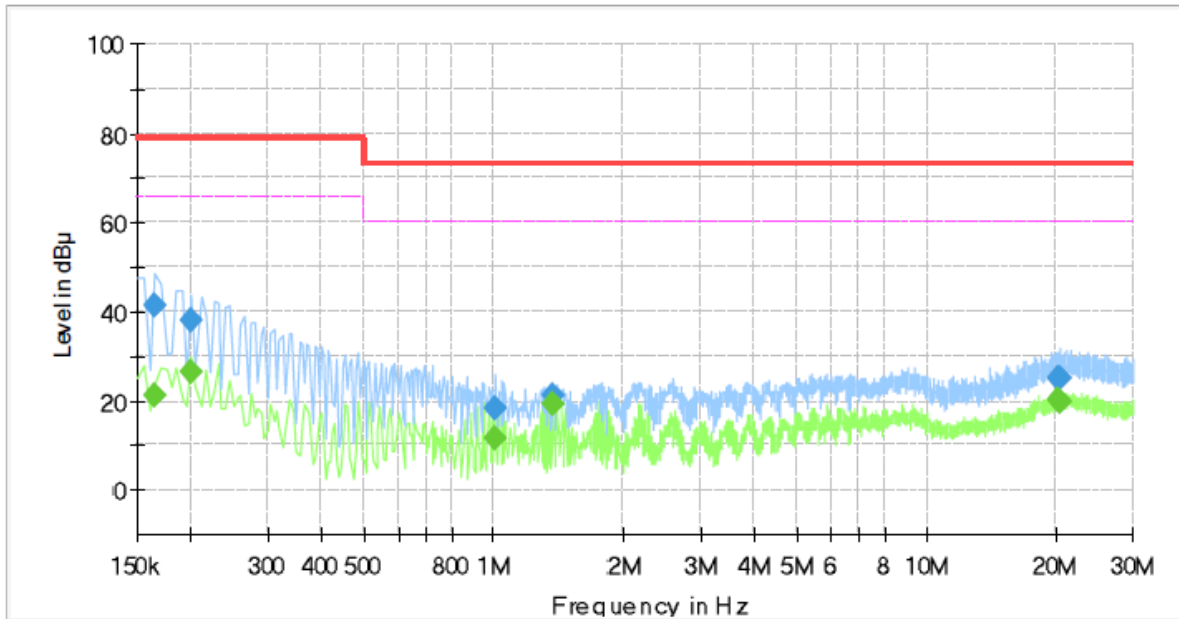

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	21.21	66.00	44.79	1000.0	9.000	N	19.4
0.165000	41.61	---	79.00	37.39	1000.0	9.000	N	19.4
0.200000	---	26.62	66.00	39.38	1000.0	9.000	N	19.4
0.200000	38.24	---	79.00	40.76	1000.0	9.000	N	19.4
1.010000	---	11.78	60.00	48.22	1000.0	9.000	N	20.0
1.010000	18.51	---	73.00	54.49	1000.0	9.000	N	20.0
1.370000	---	19.28	60.00	40.72	1000.0	9.000	N	20.2
1.370000	21.01	---	73.00	51.99	1000.0	9.000	N	20.2
20.185000	---	20.09	60.00	39.91	1000.0	9.000	N	20.2
20.185000	25.21	---	73.00	47.79	1000.0	9.000	N	20.2
20.445000	---	19.79	60.00	40.21	1000.0	9.000	N	20.2
20.445000	24.88	---	73.00	48.12	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

■ DC Mode

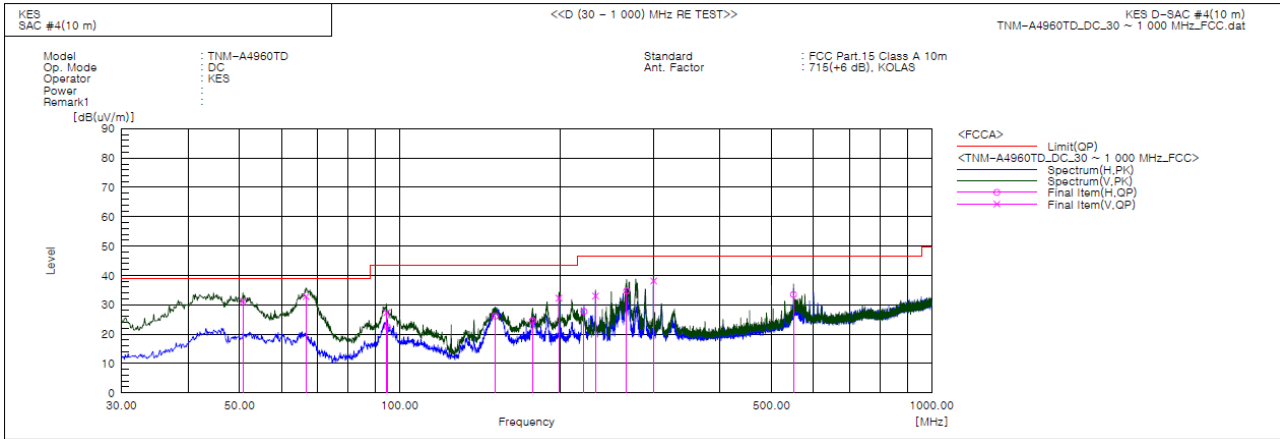

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.734	V	52.1	-21.0	31.1	39.0	7.9	100.0	128.0	
2	66.618	V	56.5	-23.7	32.8	39.0	6.2	157.0	102.0	
3	94.505	V	50.9	-23.6	27.3	43.5	16.2	117.0	113.0	
4	94.748	H	46.0	-23.5	22.5	43.5	21.0	400.0	144.0	
5	151.129	H	51.3	-25.2	26.1	43.5	17.4	295.0	298.0	
6	177.561	H	48.3	-23.7	24.6	43.5	18.9	331.0	290.0	
7	199.144	V	53.3	-21.0	32.3	43.5	11.2	174.0	162.0	
8	221.939	H	48.0	-20.3	27.7	46.5	18.8	400.0	275.0	
9	233.458	V	52.9	-19.9	33.0	46.5	13.5	116.0	207.0	
10	266.923	H	53.6	-18.9	34.7	46.5	11.8	355.0	171.0	
11	300.024	V	56.1	-18.0	38.1	46.5	8.4	124.0	256.0	
12	550.041	H	43.8	-10.3	33.5	46.5	13.0	321.0	216.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0302
 Page (22) of (47)

■ PoE Mode

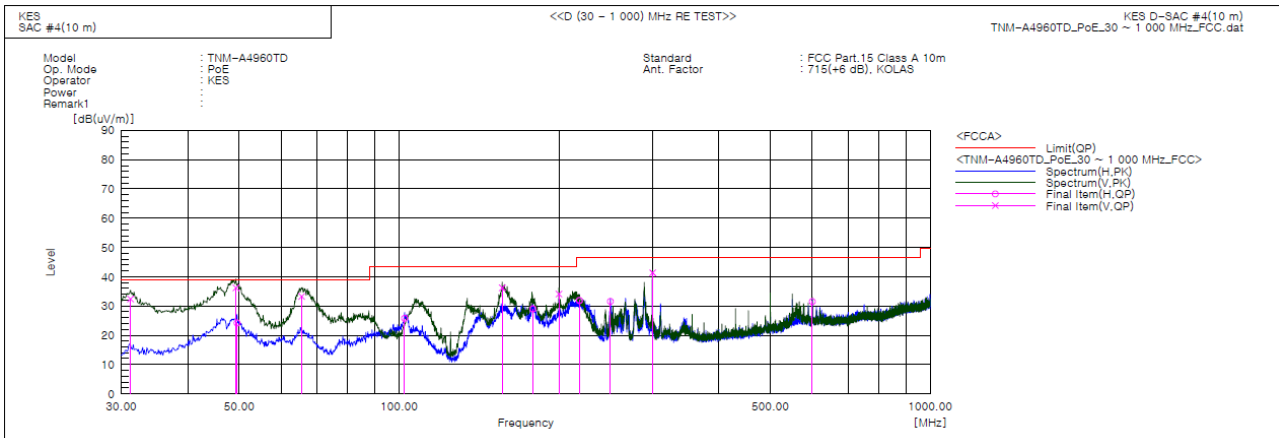

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.213	V	57.5	-25.1	32.4	39.0	6.6	100.0	148.0	
2	49.279	V	57.3	-21.1	36.2	39.0	2.8	114.0	247.0	
3	49.521	H	45.2	-21.0	24.2	39.0	14.8	400.0	177.0	
4	65.526	V	56.7	-23.4	33.3	39.0	5.7	172.0	110.0	
5	102.386	H	48.3	-22.5	25.8	43.5	17.7	364.0	173.0	
6	156.343	V	61.1	-24.9	36.2	43.5	7.3	132.0	145.0	
7	178.653	H	52.6	-23.6	29.0	43.5	14.5	338.0	302.0	
8	199.993	V	55.1	-21.0	34.1	43.5	9.4	100.0	217.0	
9	218.665	H	52.4	-20.5	31.9	46.5	14.6	400.0	246.0	
10	249.948	H	50.9	-19.3	31.6	46.5	14.9	319.0	257.0	
11	300.024	V	59.4	-18.0	41.4	46.5	5.1	162.0	186.0	
12	599.996	H	40.0	-8.5	31.5	46.5	15.0	327.0	117.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



- IC Regulation ICES-003 Issue 7

■ DC Mode

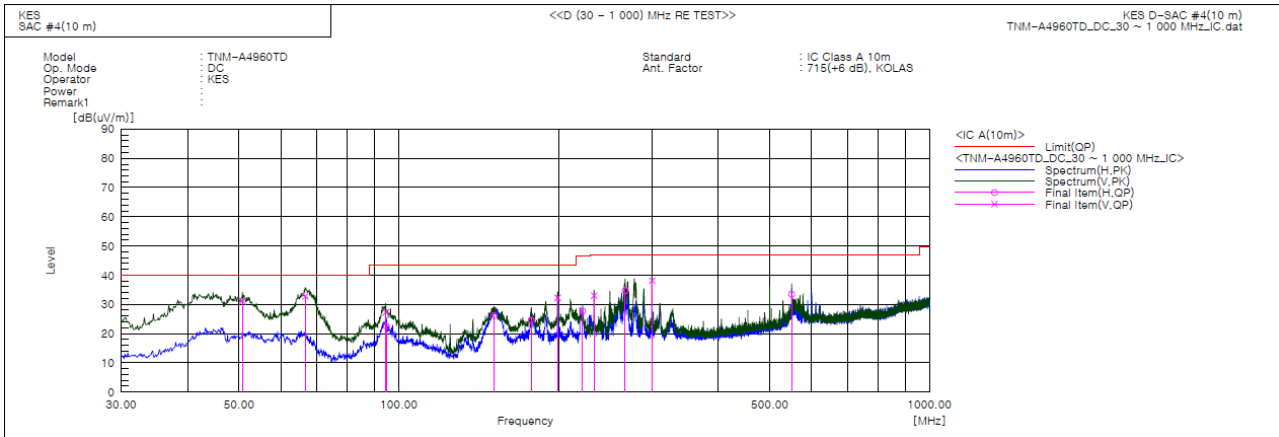

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.734	V	52.1	-21.0	31.1	40.0	8.9	100.0	128.0	
2	66.618	V	56.5	-23.7	32.8	40.0	7.2	157.0	102.0	
3	94.505	V	50.9	-23.6	27.3	43.5	16.2	117.0	113.0	
4	94.748	H	46.0	-23.5	22.5	43.5	21.0	400.0	144.0	
5	151.129	H	51.3	-25.2	26.1	43.5	17.4	295.0	298.0	
6	177.561	H	48.3	-23.7	24.6	43.5	18.9	331.0	290.0	
7	199.144	V	53.3	-21.0	32.3	43.5	11.2	174.0	162.0	
8	221.939	H	48.0	-20.3	27.7	46.4	18.7	400.0	275.0	
9	233.458	V	52.9	-19.9	33.0	47.0	14.0	116.0	207.0	
10	266.923	H	53.6	-18.9	34.7	47.0	12.3	355.0	171.0	
11	300.024	V	56.1	-18.0	38.1	47.0	8.9	124.0	256.0	
12	550.041	H	43.8	-10.3	33.5	47.0	13.5	321.0	216.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0302
 Page (24) of (47)

■ PoE Mode

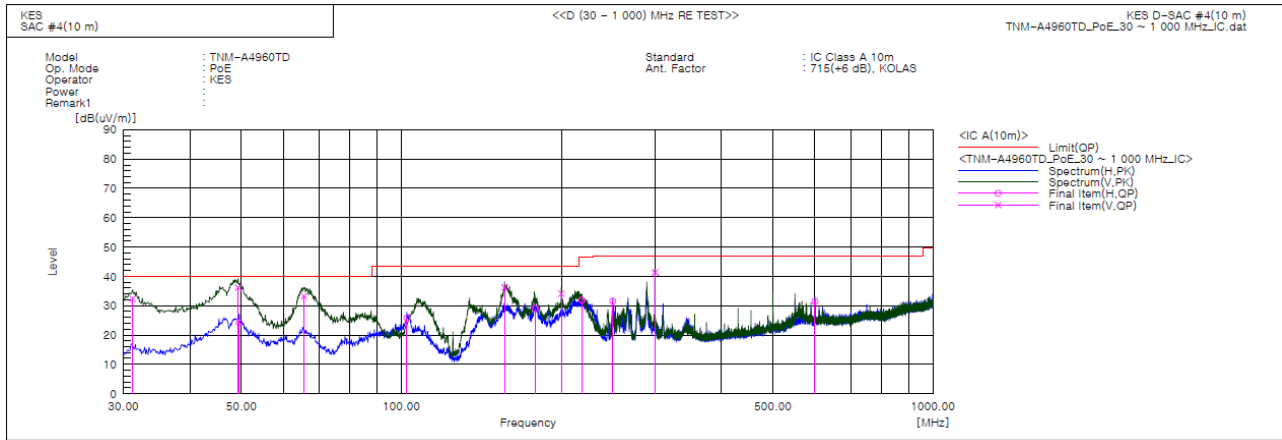

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.213	V	57.5	-25.1	32.4	40.0	7.6	100.0	148.0	
2	49.279	V	57.3	-21.1	36.2	40.0	3.8	114.0	247.0	
3	49.521	H	45.2	-21.0	24.2	40.0	15.8	400.0	177.0	
4	65.526	V	56.7	-23.4	33.3	40.0	6.7	172.0	110.0	
5	102.386	H	48.3	-22.5	25.8	43.5	17.7	364.0	173.0	
6	156.343	V	61.1	-24.9	36.2	43.5	7.3	132.0	145.0	
7	178.653	H	52.6	-23.6	29.0	43.5	14.5	338.0	302.0	
8	199.993	V	55.1	-21.0	34.1	43.5	9.4	100.0	217.0	
9	218.665	H	52.4	-20.5	31.9	46.4	14.5	400.0	246.0	
10	249.948	H	50.9	-19.3	31.6	47.0	15.4	319.0	257.0	
11	300.024	V	59.4	-18.0	41.4	47.0	5.6	162.0	186.0	
12	599.996	H	40.0	-8.5	31.5	47.0	15.5	327.0	117.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

DC Mode

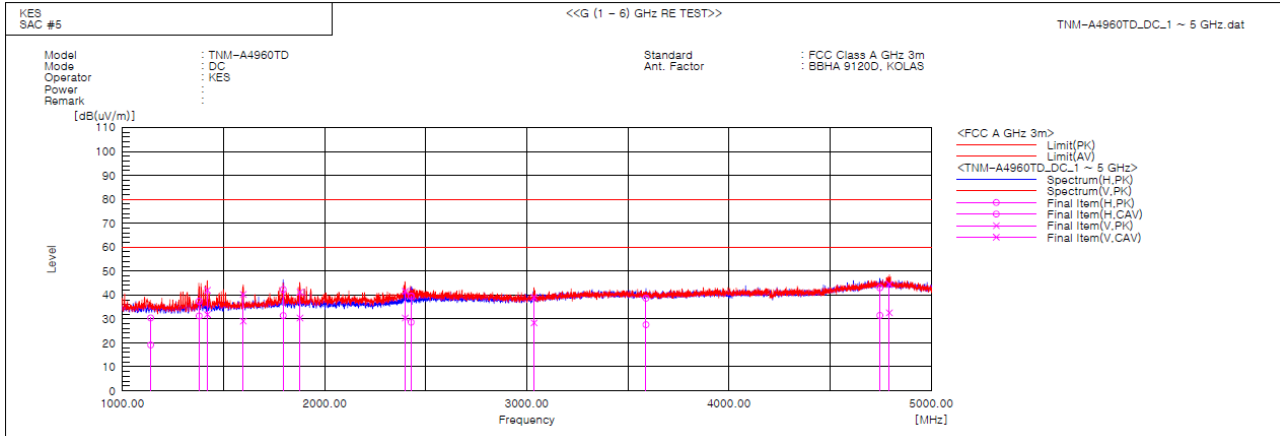


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1140.041	H	37.3	26.0	-6.9	30.4	19.1	80.0	60.0	49.6	40.9	345.0	194.5	
2	1379.323	H	42.8	36.7	-5.4	37.4	31.3	80.0	60.0	42.6	28.7	347.0	108.3	
3	1420.067	V	47.2	37.1	-5.2	42.0	31.9	80.0	60.0	38.0	28.1	171.0	76.6	
4	1597.912	V	44.9	33.7	-4.6	40.3	29.1	80.0	60.0	39.7	30.9	132.0	189.4	
5	1795.772	H	46.0	35.1	-3.7	42.3	31.4	80.0	60.0	37.7	28.6	349.0	60.9	
6	1877.752	V	44.5	33.7	-3.3	41.2	30.4	80.0	60.0	38.8	29.6	100.0	44.3	
7	2398.531	V	43.1	31.9	-1.5	41.6	30.4	80.0	60.0	38.4	29.6	168.0	145.9	
8	2428.125	H	40.9	30.0	-1.4	39.5	28.6	80.0	60.0	40.5	31.4	346.0	356.9	
9	3035.623	V	38.1	27.4	1.0	39.1	28.4	80.0	60.0	40.9	31.6	145.0	5.5	
10	3589.733	H	36.8	25.7	1.9	38.7	27.6	80.0	60.0	41.3	32.4	400.0	93.2	
11	4746.322	H	36.6	25.1	6.4	43.0	31.5	80.0	60.0	37.0	28.5	316.0	150.6	
12	4793.151	V	37.9	26.0	6.6	44.5	32.6	80.0	60.0	35.5	27.4	100.0	174.4	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

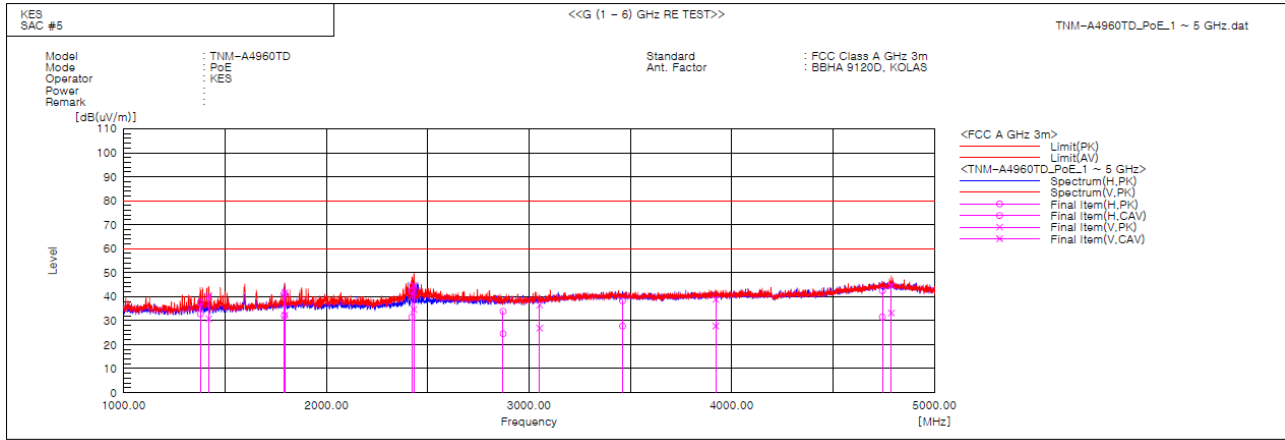

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1379.147	H	43.0	38.2	-5.4	37.6	32.8	80.0	60.0	42.4	27.2	341.0	117.7	
2	1419.854	V	45.5	36.0	-5.2	40.3	30.8	80.0	60.0	39.7	29.2	100.0	87.1	
3	1792.639	H	44.9	35.7	-3.7	41.2	32.0	80.0	60.0	38.8	28.0	296.0	24.7	
4	1795.078	V	45.5	36.1	-3.7	41.8	32.4	80.0	60.0	38.2	27.6	127.0	117.9	
5	2421.220	H	43.7	32.8	-1.4	42.3	31.4	80.0	60.0	37.7	28.6	400.0	164.7	
6	2432.331	V	46.1	36.1	-1.4	44.7	34.7	80.0	60.0	35.3	25.3	162.0	1.3	
7	2872.427	H	33.3	24.0	0.6	33.9	24.6	80.0	60.0	46.1	35.4	337.0	49.8	
8	3052.642	V	35.5	25.8	1.1	36.6	26.9	80.0	60.0	43.4	33.1	138.0	322.7	
9	3461.633	H	36.6	26.1	1.7	38.3	27.8	80.0	60.0	41.7	32.2	361.0	323.1	
10	3921.272	V	36.0	24.9	2.9	38.9	27.8	80.0	60.0	41.1	32.2	100.0	98.7	
11	4743.135	H	36.1	25.1	6.4	42.5	31.5	80.0	60.0	37.5	28.5	370.0	70.1	
12	4787.600	V	38.1	26.6	6.6	44.7	33.2	80.0	60.0	35.3	26.8	173.0	13.0	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration


Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

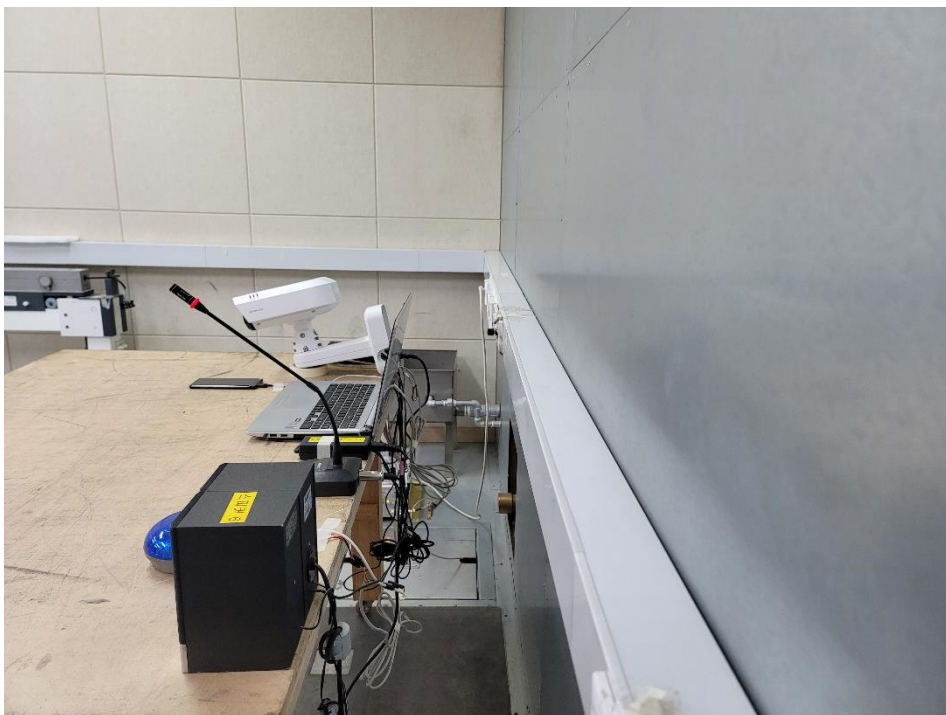

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

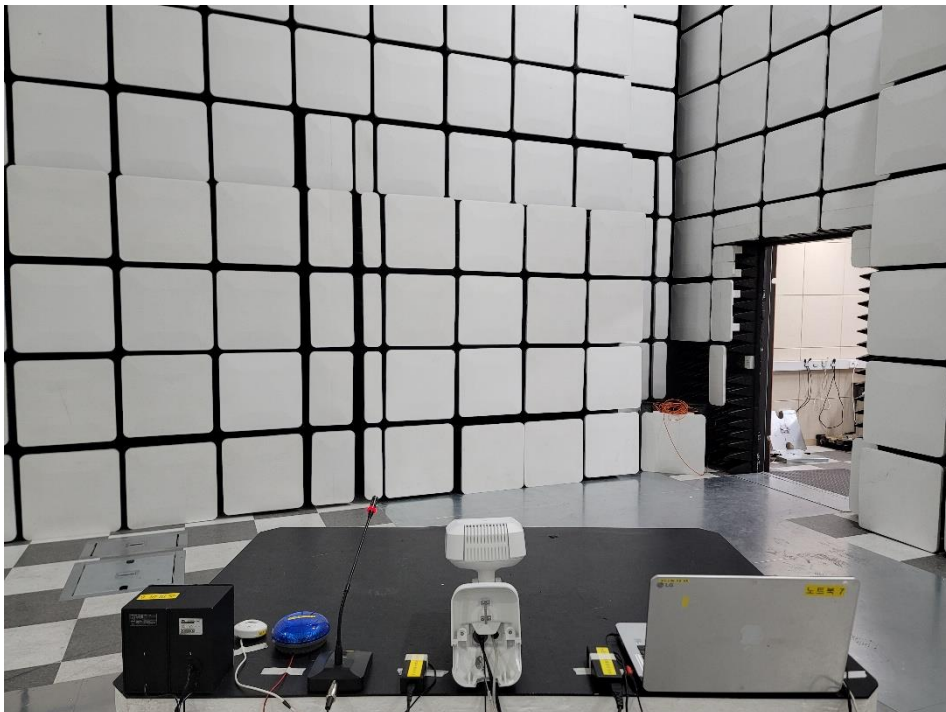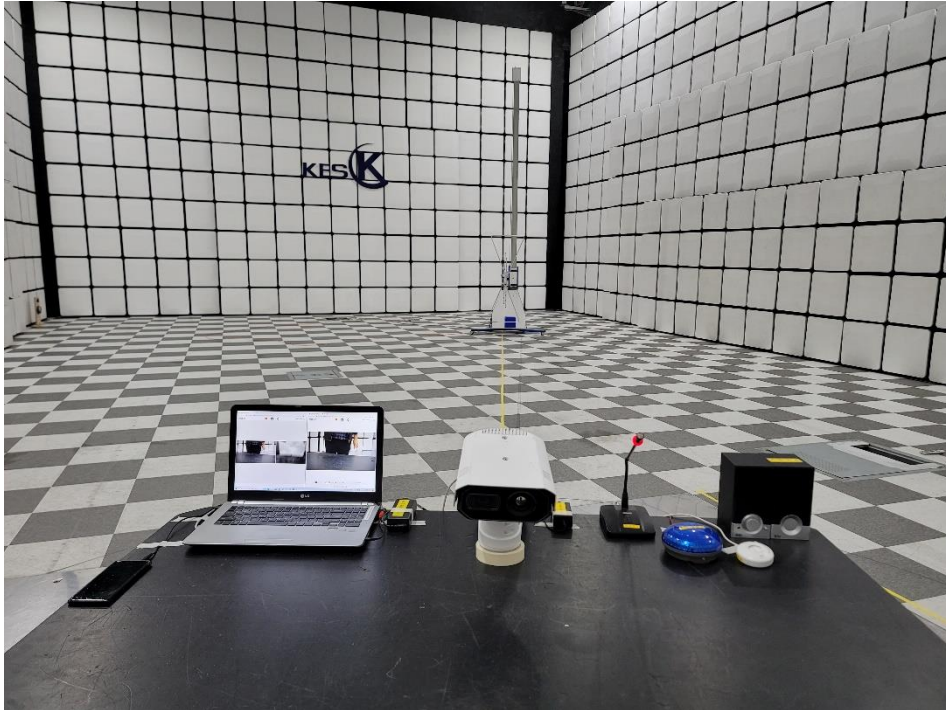

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode

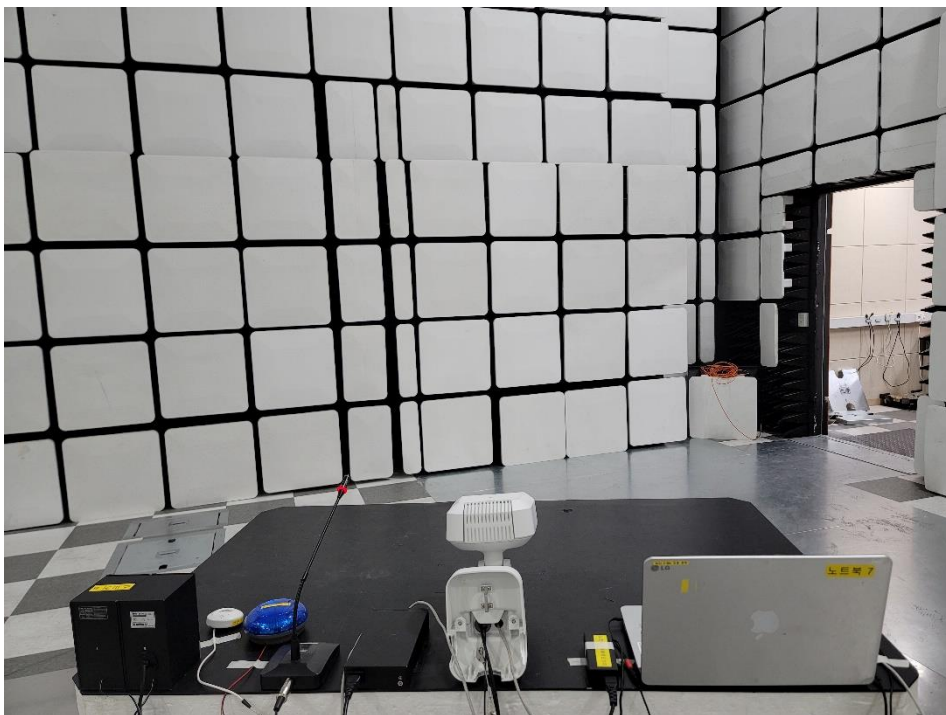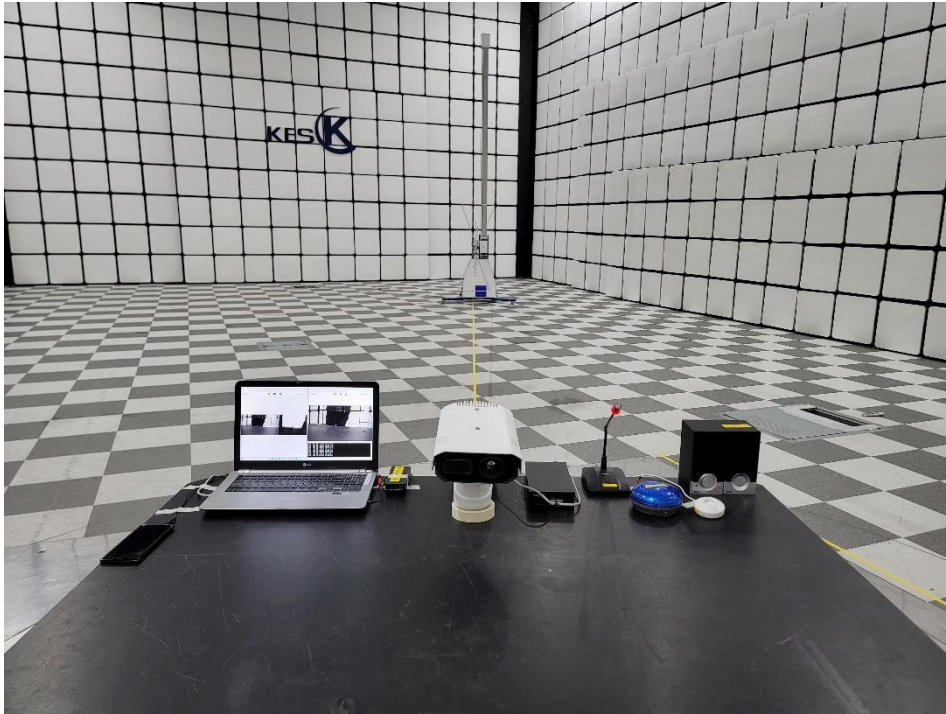

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

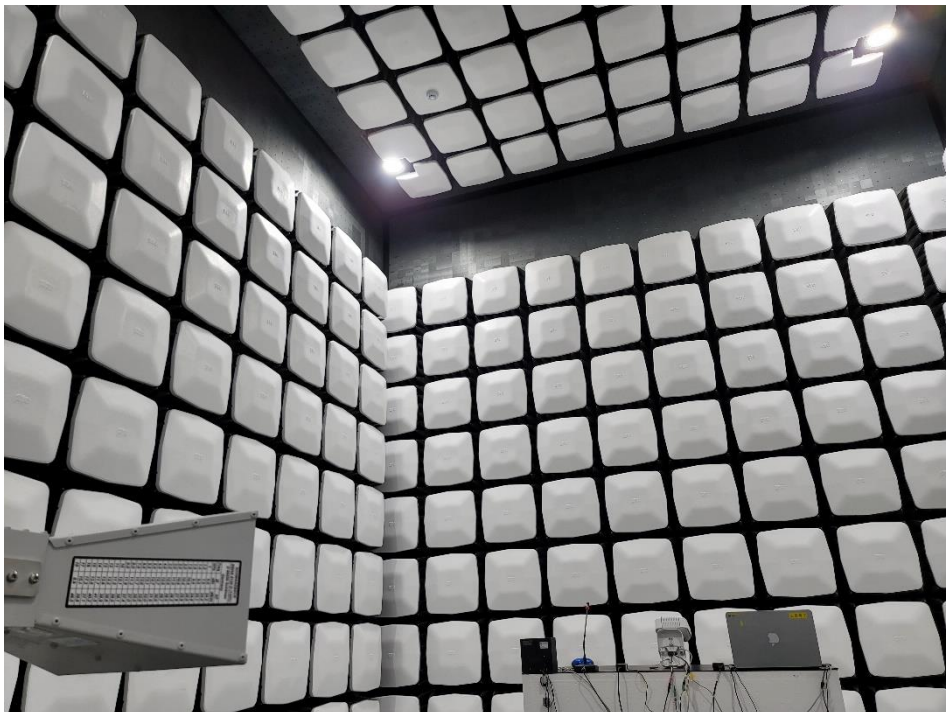

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode

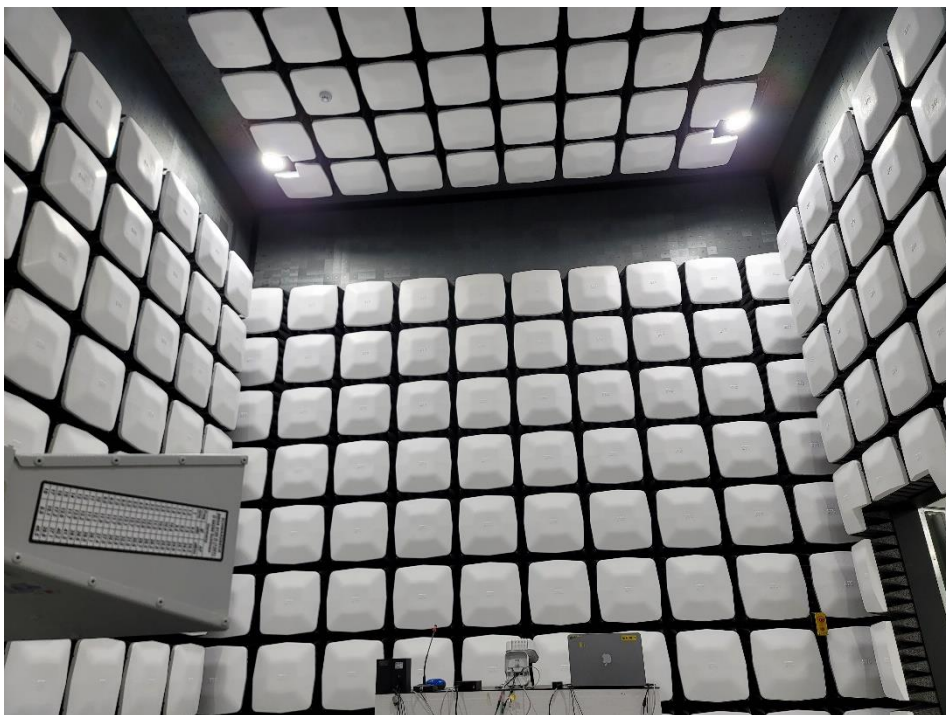

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)

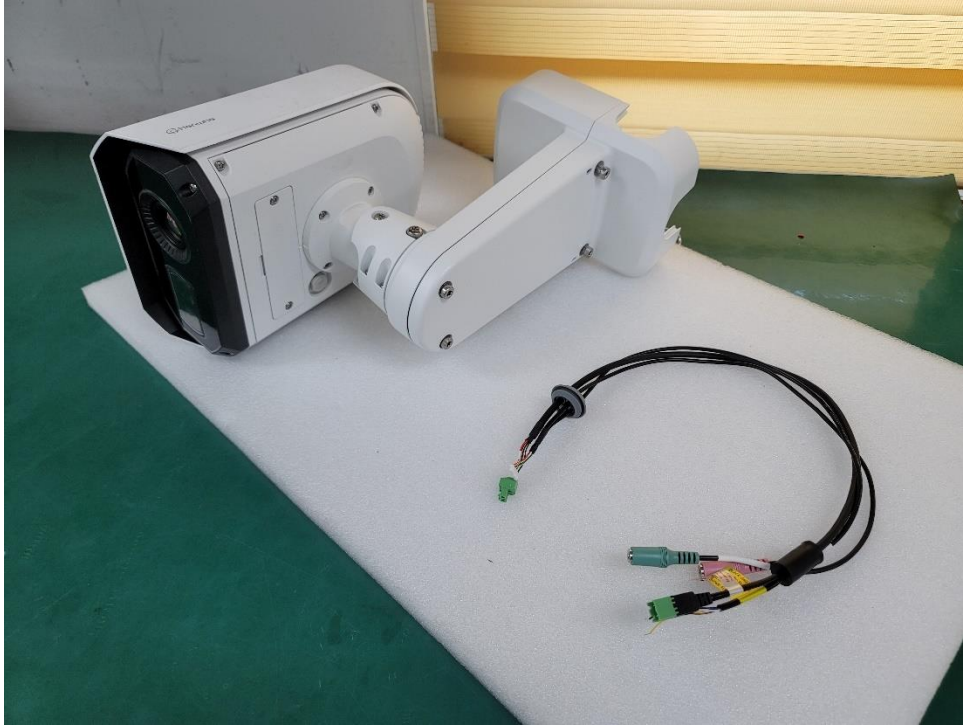


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)

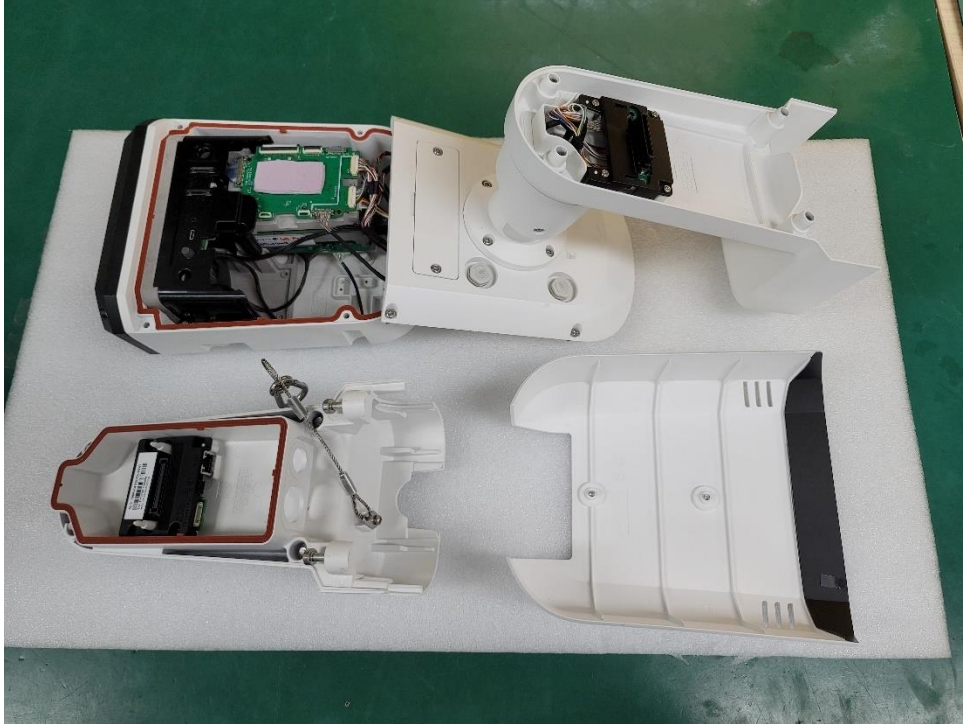


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Back Box Board

(Top)

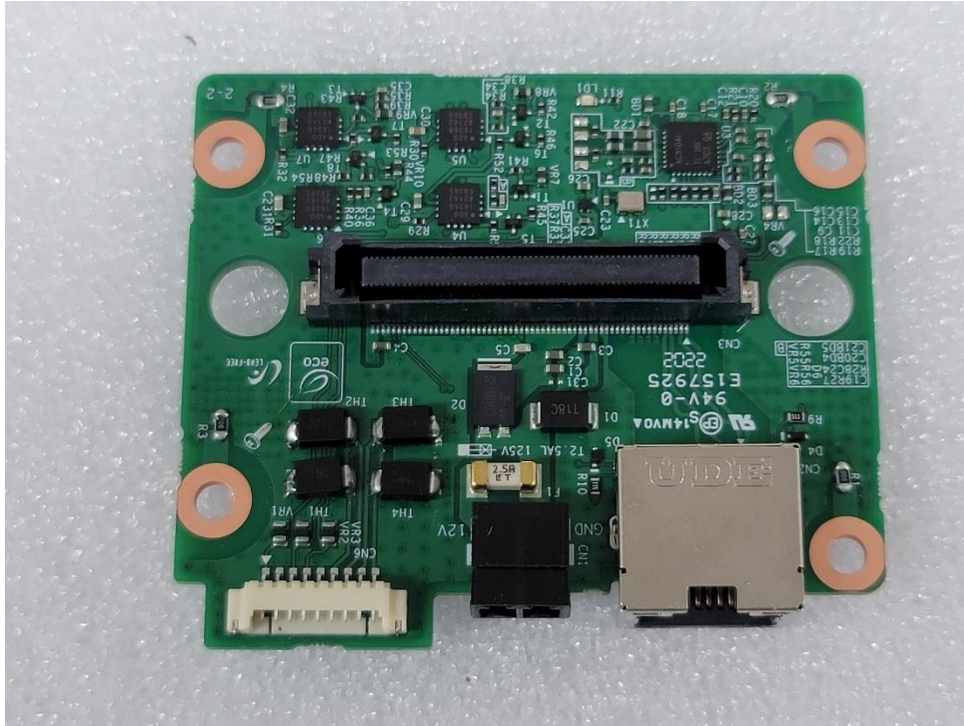

(Bottom)

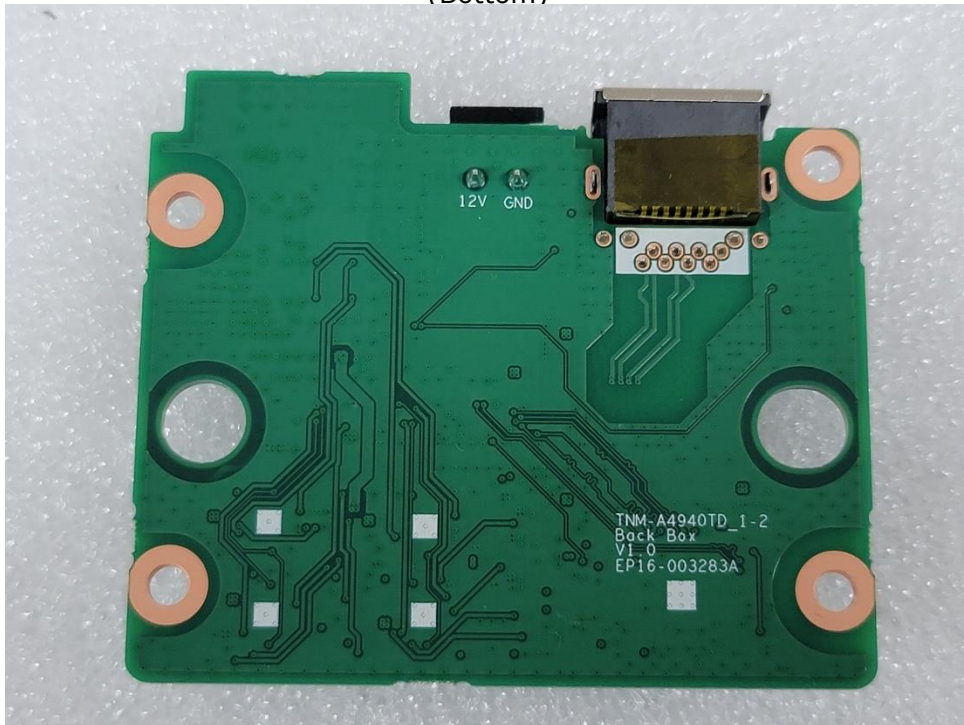


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Connector Board

(Top)




(Bottom)

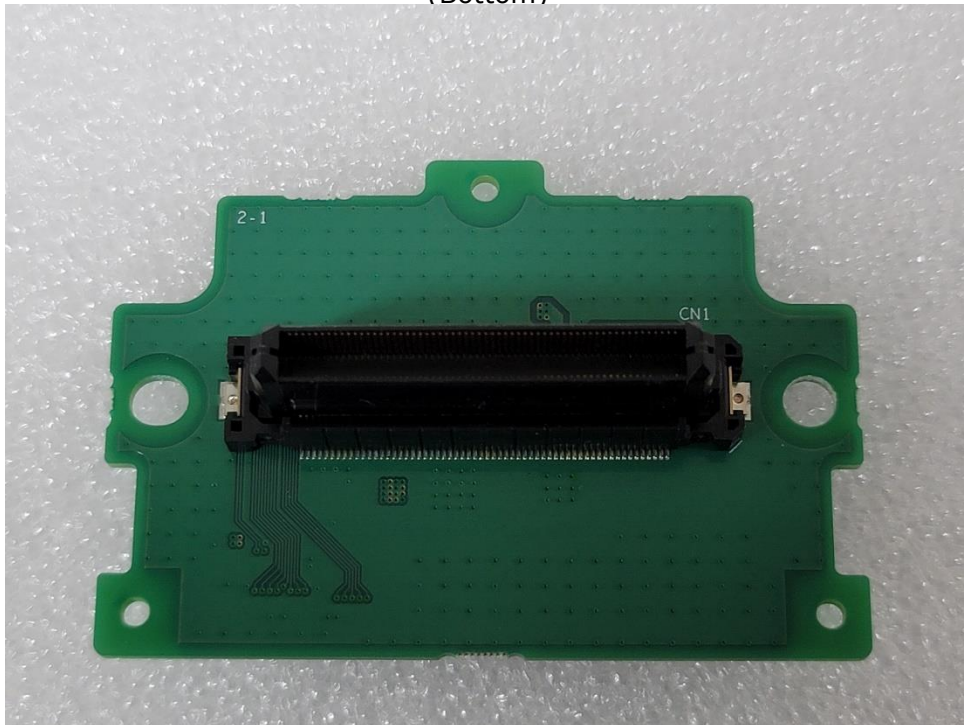


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Interface Board

(Top)

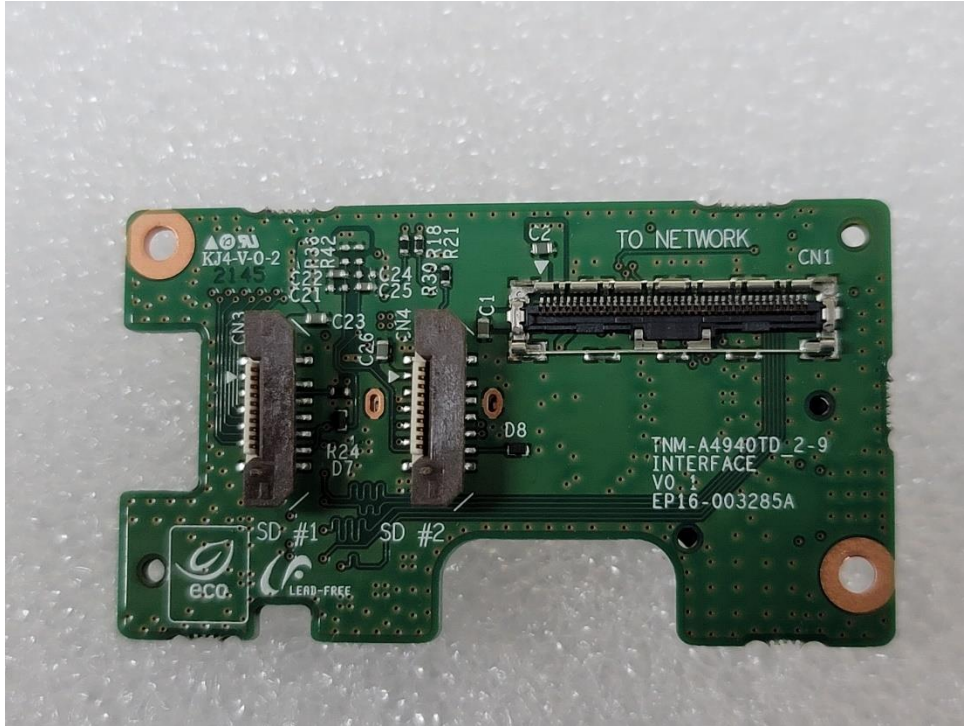


(Bottom)

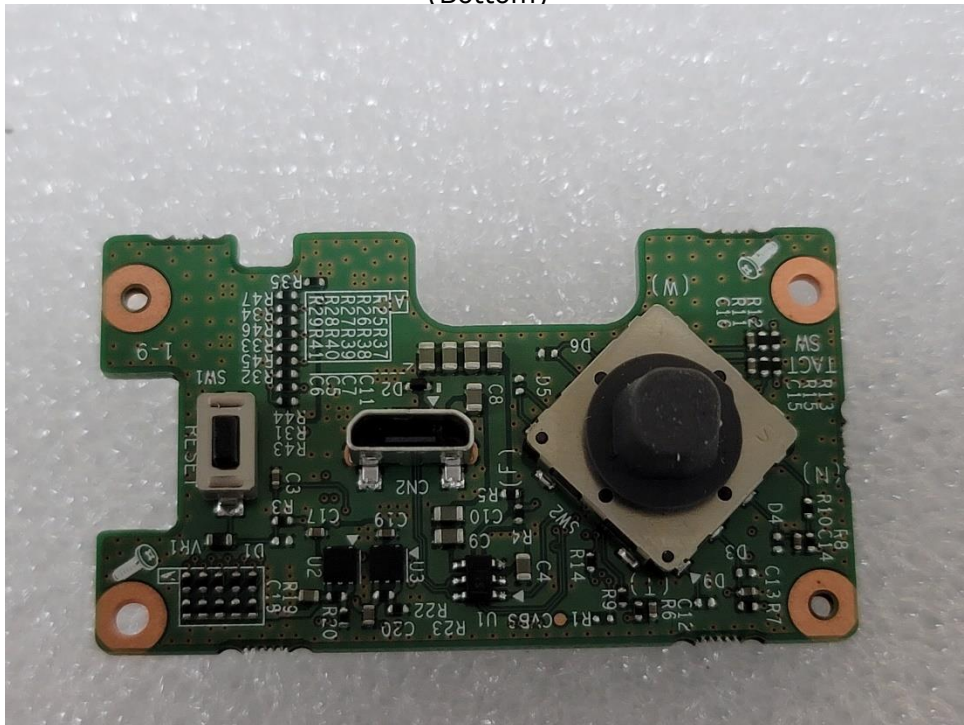

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – IR Detector Board

(Top)

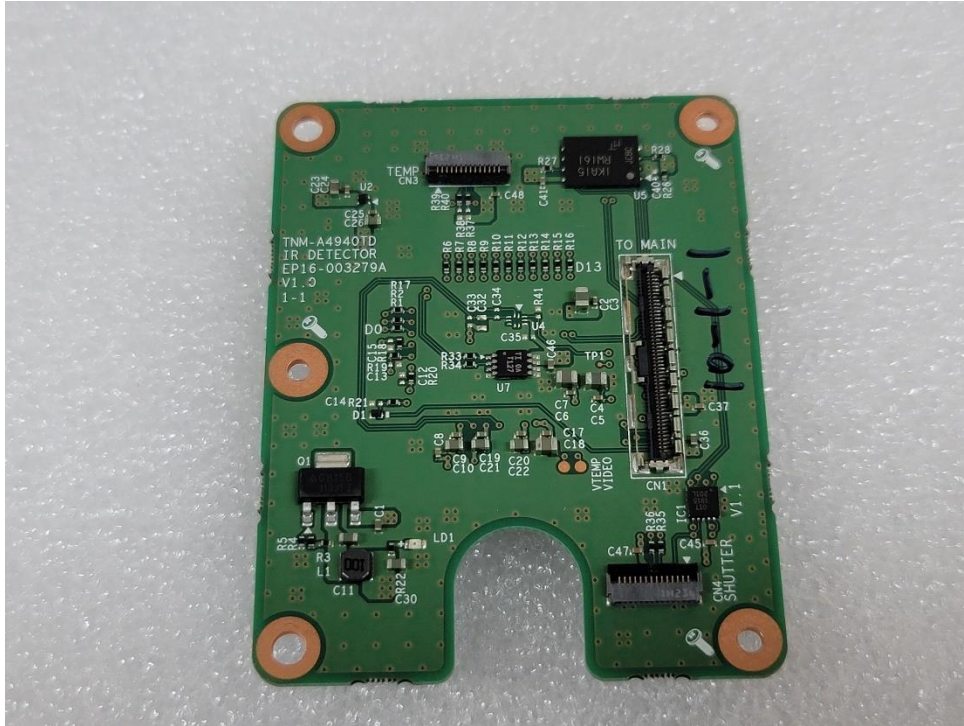

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – IR Board

(Top)



(Bottom)

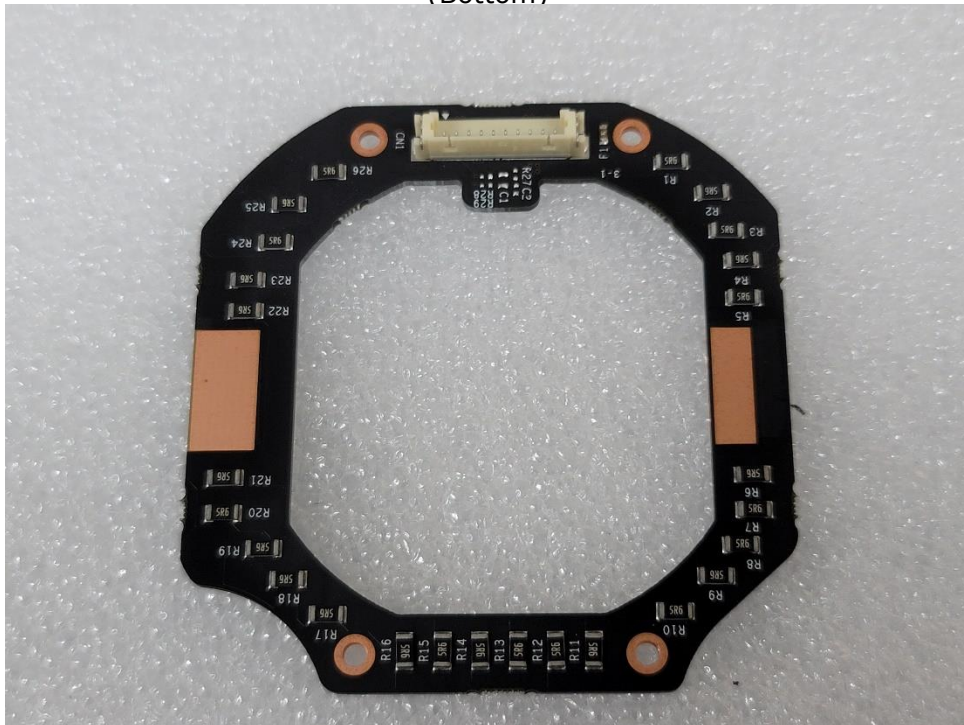


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Network Board

(Top)




(Bottom)

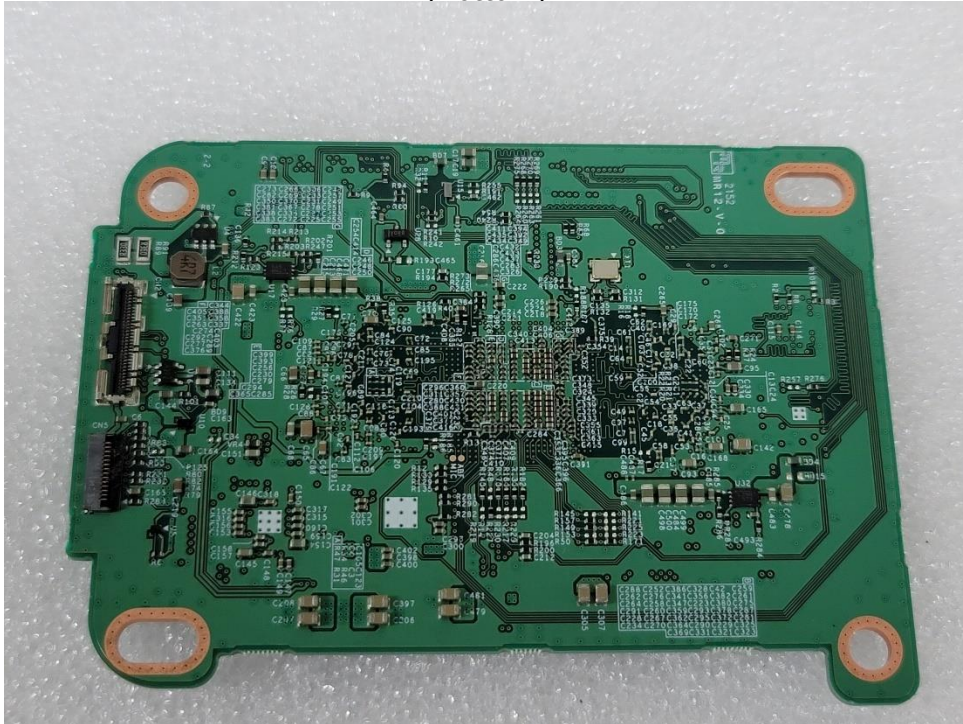

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – NUC Board

(Top)

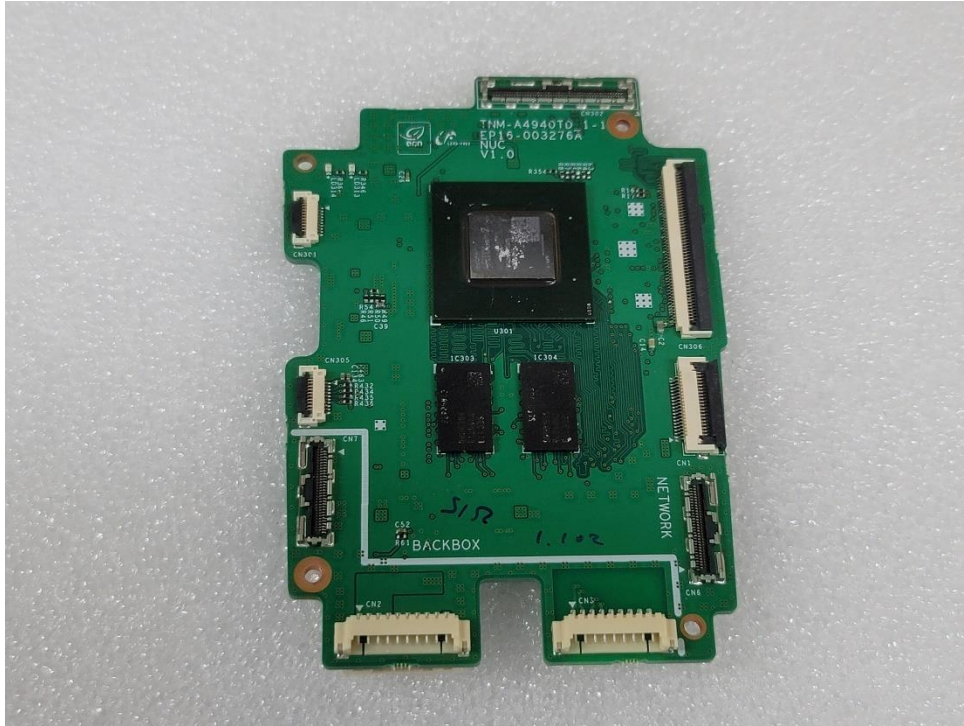


(Bottom)




EUT Internal View – Power Board

(Top)

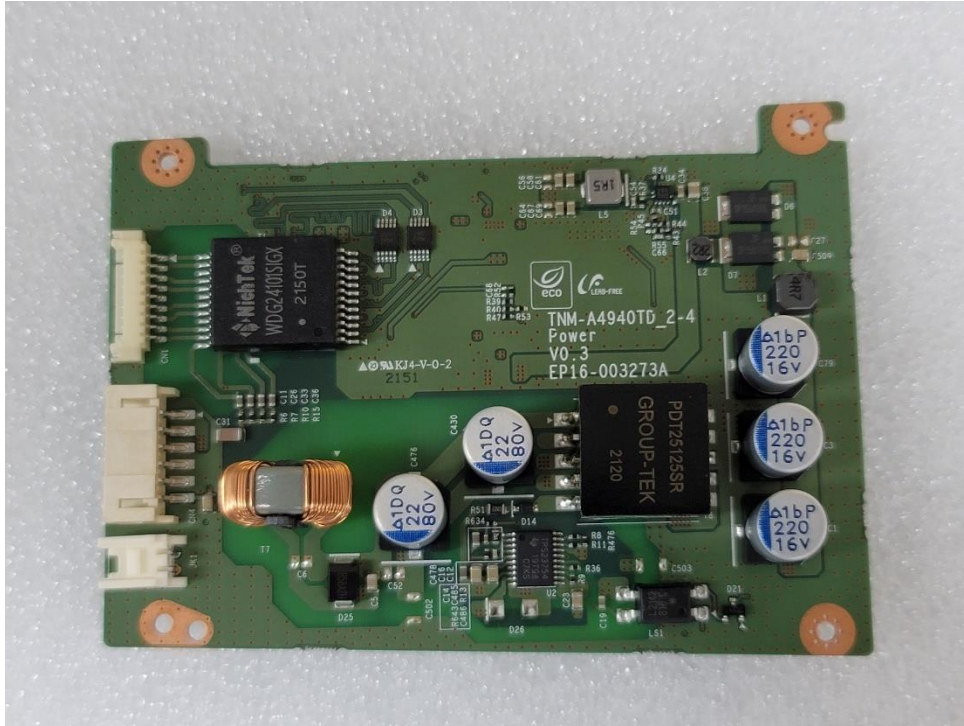

(Bottom)

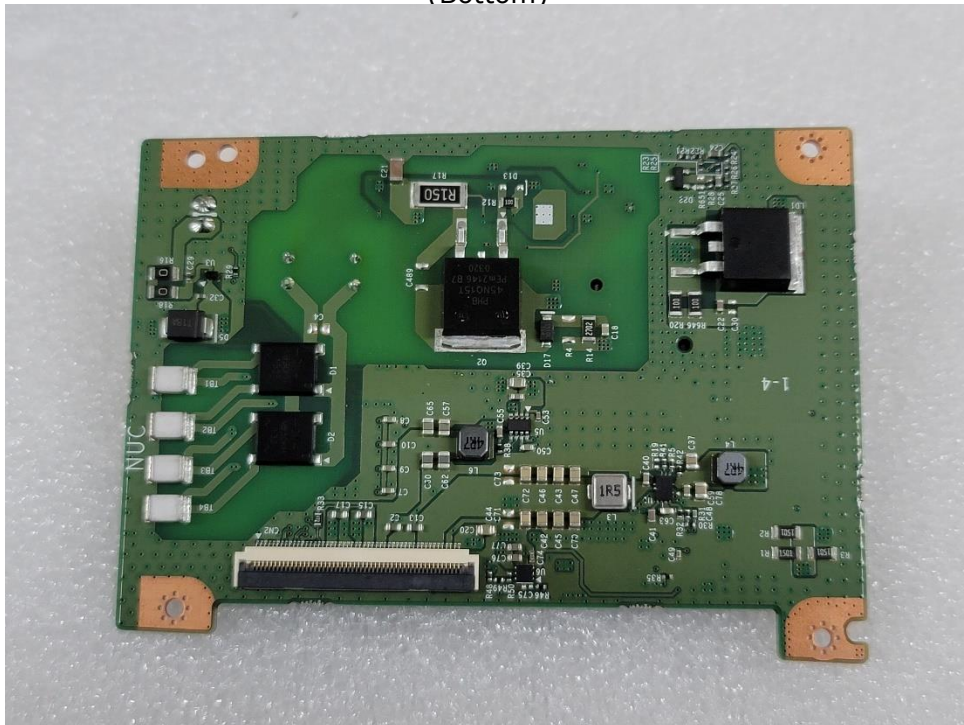


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SD Board

(Top)



(Bottom)

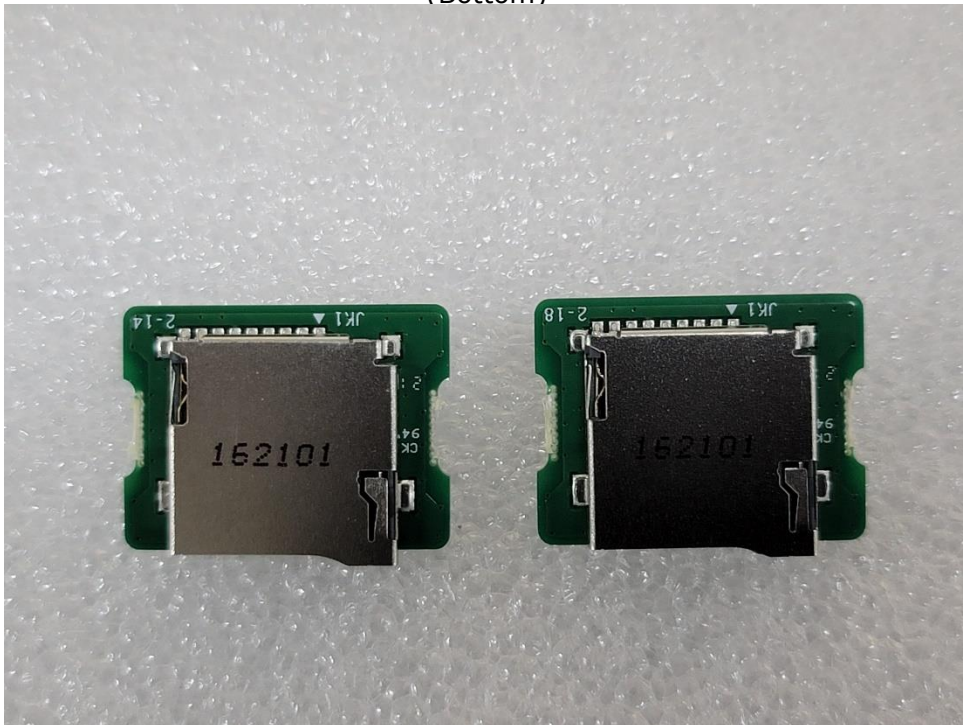


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Sensor Board

(Top)



(Bottom)

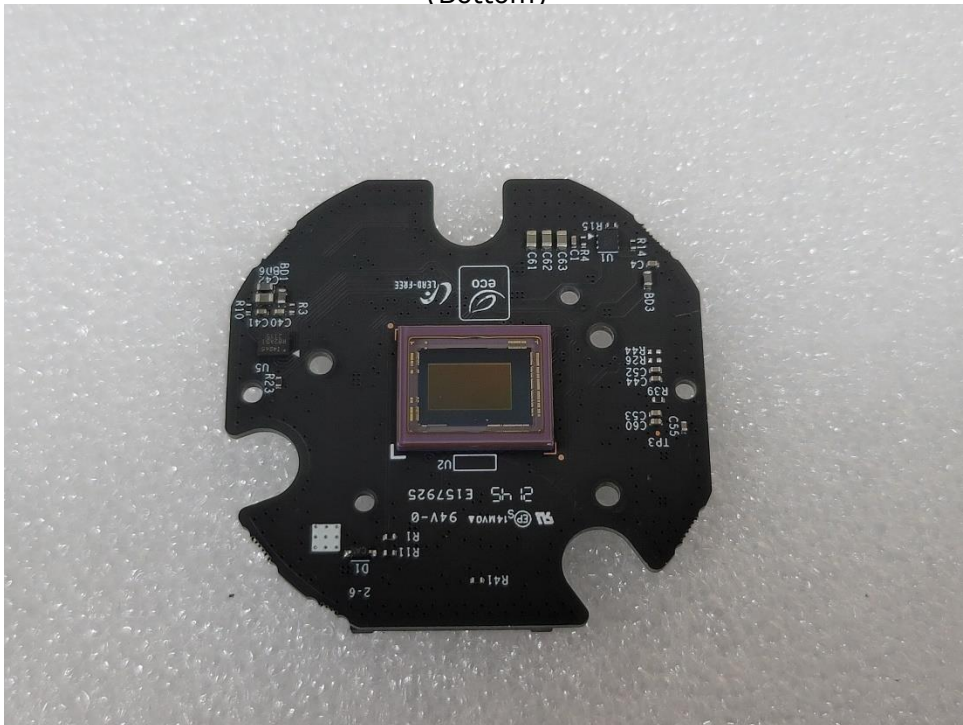


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens 1

(Top)




(Bottom)

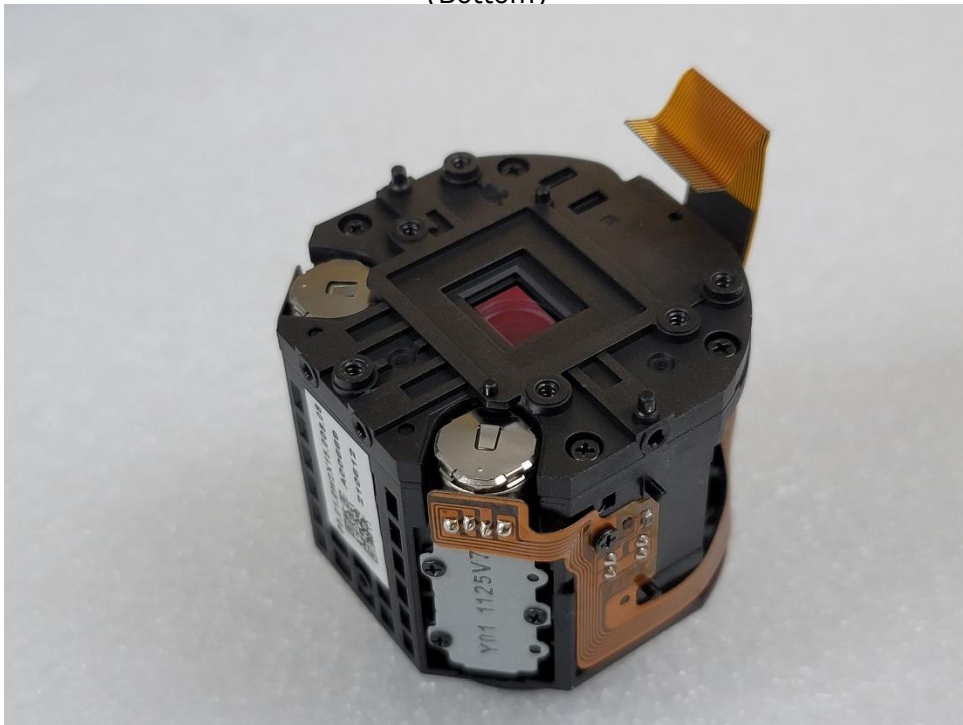


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens 2

(Top)

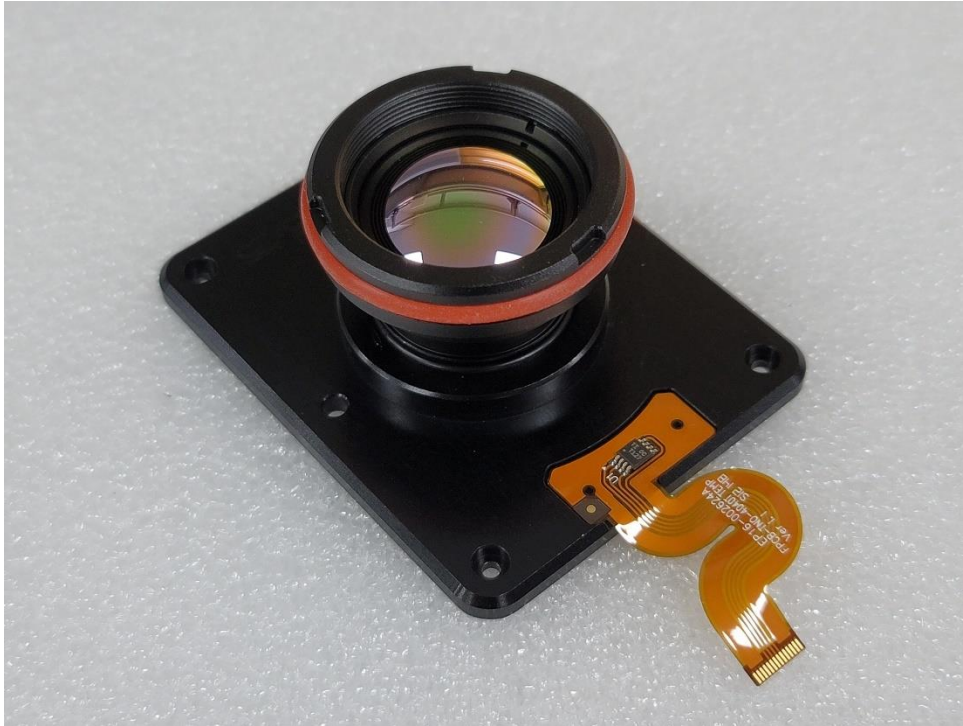

(Bottom)

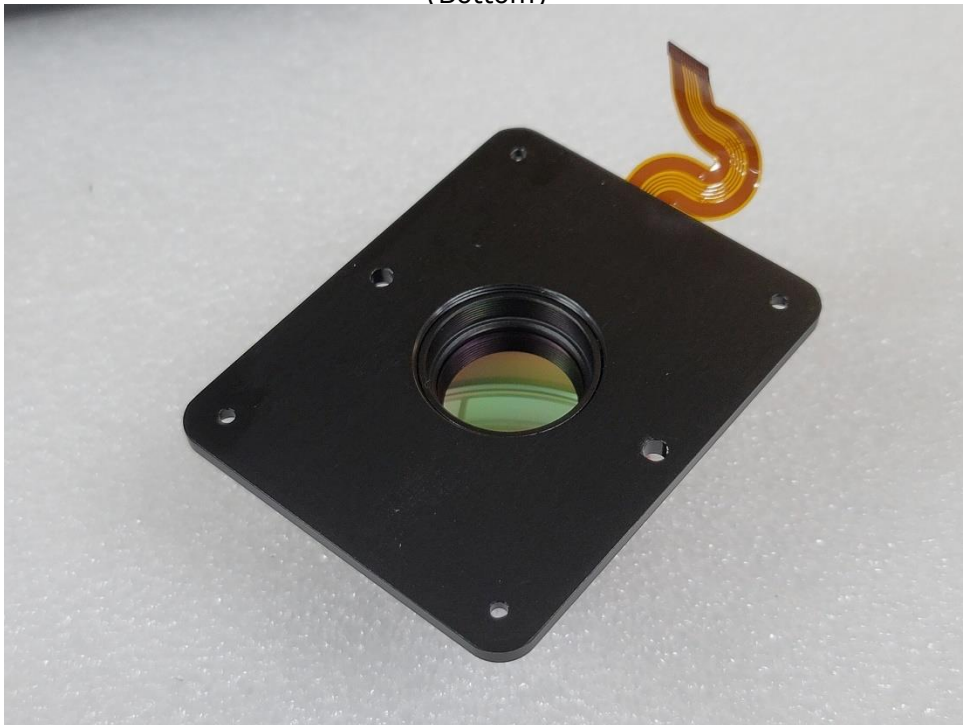

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.