

# TEST REPORT



## CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,  
Gyeonggi-do, Republic of Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

REPORT No.:  
CTK-2024-02806  
Page (1) / (14) pages

### 1. Applicant

- Name : Hanwha Vision Co., Ltd
- Address : 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13488 Republic of Korea
- Date of Receipt : SEP 26, 2024

### 2. Manufacturer

- Name : Hanwha Vision Co., Ltd

### 3. Use of Report :

For customer submission

### 4. Test sample / Model :

NETWORK CAMERA / TNV-C8014RM

### 5. Date(s) of test :

OCT 08, 2024 ~ OCT 10, 2024

### 6. Test Standard (Method) used :

IEC 60529:1989 +A1:1999+A2:2013

### 7. Testing Environment :

Temperature: (25 ±10) °C, Humidity: (50 ±25) %R.H.  
Pressure: (96 ±10) kPa

### 8. Test Results :

Clause 4. Refer to the test results

### 9. Location of Test :

☒ Permanent Testing Lab ☐ On Site Testing  
(5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,  
Gyeonggi-do, Republic of Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This report cannot be reproduced or copied without the written consent of CTK

Approval	Tested by	Technical Manager
	Name: KyuNam Park (Signature)	Name: HoHyun Lee (Signature)

Remark. This report is not related to KOLAS accreditation and relevant regulation.


OCT 17, 2024

CTK Co., Ltd.



## Table of contents

- 1. Testing Laboratory\_\_\_\_\_ 3
  - 1.1 Testing laboratory information..... 3
  - 1.2 Testing laboratory accreditation status ..... 3
  
- 2. Product description and Equipment information \_\_\_\_\_ 4
  - 2.1 Product description ..... 4
  - 2.2 Model description ..... 4
  - 2.3 Equipment information ..... 4
  - 2.4 Pre-test product images ..... 5
  - 2.5 Testing equipment images..... 6
  - 2.6 Product Appearance..... 7
  
- 3. Test conditions and methods\_\_\_\_\_ 8
  - 3.1 Test duration ..... 8
  - 3.2 Test conditions..... 8
  - 3.3 Testing Image.....10
  
- 4. Test result \_\_\_\_\_ 12
  - 4.1 Test Result Table .....12
  - 4.2 Post-Test Product Images .....13


 <p><b>CTK Co., Ltd.</b> The Prime Leader of Global Regulatory Compliance</p>	<p><b>CTK Co., Ltd.</b> 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501</p>	<p>REPORT No.: CTK-2024-02806 Page (3) / (14) pages</p>	
--	---	---	--


## 1. Testing Laboratory

### 1.1 Testing laboratory information

Lab. Name	CTK Co., Ltd.
Address	5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
Tel.	+82-31-339-9970
Fax.	+82-31-624-9501
E-Mail	<a href="mailto:ctk@e-ctk.com">ctk@e-ctk.com</a>
Website	<a href="http://e-ctk.com">e-ctk.com</a>

### 1.2 Testing laboratory accreditation status

Country	Classification	Accreditation Number	Logo
International	KOLAS	TESTING NO. KT119	

 <p><b>CTK Co., Ltd.</b> The Prime Leader of Global Regulatory Compliance</p>	<p><b>CTK Co., Ltd.</b> 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501</p>	<p>REPORT No.: CTK-2024-02806 Page (4) / (14) pages</p>	
--	---	---	--

## 2. Product description and Equipment information

### 2.1 Product description

Product Name	Model Name	Quantity	Comment
NETWORK CAMERA	TNV-C8014RM	1 EA	-

### 2.2 Model description

Basic Model .....	TNV-C8014RM
Series model .....	TNV-C8034RM
Model differences .....	Use of the same external shape and materials (case, finishing material, PCB, cable, etc.), differences in fixed lens inside the product.

### 2.3 Equipment information

Testing equipment	Model Name	Manufacturer	Manufacturing Number	Calibration Date
Stop Watch	NONE	Casio	612Q01R-1	2026-01-23
Push Pull Gage	FB30K	Imada	83805	2025-01-23
Test Rod Probe Ø1.0	TRP-02	ED&D	S1-J15	2027-05-16
Dust Chamber	NONE	JFM	S5-IP02	2025-02-23
Water flow meter with IPX6	M-25	LZT	1903	2025-02-19
Hose Nozzle (12.5 mm)	IPX6	Kingpo	S5-IP07	-
Steel measuring meter	5.5 m	KOMELON	225851	2025-03-27

## 2.4 Pre-test product images



Top



Bottom



Front



Rear



Left side



Right side

## 2.5 Testing equipment images



Push Pull Gage



Test Rod Probe Ø1.0



Dust Chamber



Water flow meter with IPX6





Hose Nozzle (12.5 mm)



Steel measuring meter

## 2.6 Product Appearance

Enclosure Dimensions [Unit : mm]

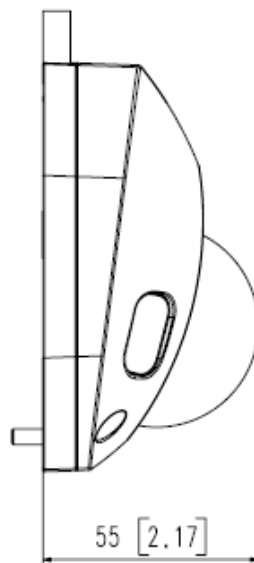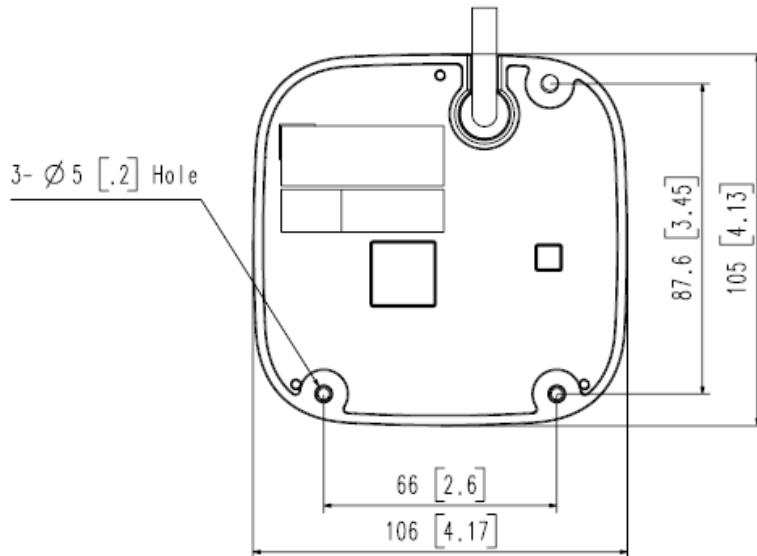

### 3. Test conditions and methods


#### 3.1 Test duration

3.1.1 Test Date : OCT 08, 2024 ~ OCT 10, 2024

#### 3.2 Test conditions

3.2.1 Test standard: **IEC 60529:1989 +A1:1999+A2:2013**

3.2.2 Arrangement of the IP code

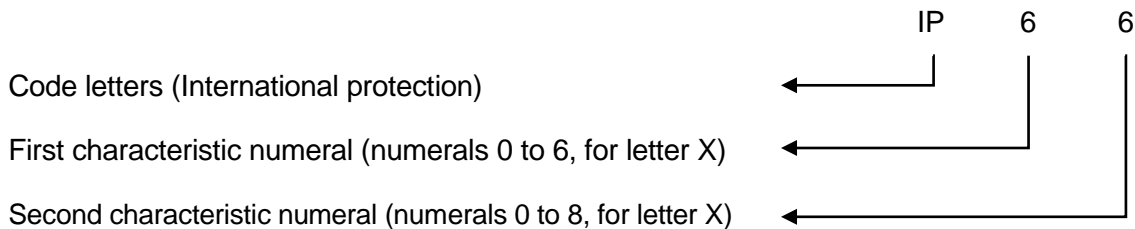

##### 3.2.2.1 Degree of protection against access to hazardous parts indicated by the first characteristic numeral

First characteristic numeral	Degree of protection	Application
6	Protected against access to hazardous parts with a wire. The access probe of 1.0 mmØ, shall not penetrate. Test force: 1 N ± 10 %	<input checked="" type="checkbox"/>

**NOTE** In the case of the first characteristic numerals 3, 4, 5 and 6, protection against access to hazardous parts is satisfied if adequate clearance is kept. The adequate clearance should be specified by the relevant product committee in accordance with 12.3.

Due to the simultaneous requirement specified in table 2, the definition “shall not penetrate” is given in table 1.



### 3.2.2.2 Degree of protection against solid foreign objects indicated by the first characteristic numeral

First characteristic numeral	Degree of protection	Application
6	<p>In Dust Testing Equipment, the test sample has to have no ingress of dust after testing atmospheric pressure present condition for 8 hr.</p> <p>(Talcum powder have to go through the measured sieve by <math>\Phi</math> 50 um wire that are spacing 75 um in squared, per volume and union Talcum powder have to be 2 kg/m<sup>3</sup>)</p> <p>Products in volume .....: <b>612.15 cm<sup>3</sup> → 0.612 L</b></p> <p>Target intake volume (Products in volume 80) .....: <b>48.97 L</b></p> <p>Suction volume (Max product in volume 60) .....: <b>36.73 LPH → 0.612 LPM</b></p> <p>Actual Suction volume .....: <b>0.612 L</b></p> <p>Suction pressure (Up to 2 kPa) .....: <b>1.71 kPa</b></p> <p>Test time (Up to 8 time) .....: <b>8 hr</b></p>	<input checked="" type="checkbox"/>
<sup>1)</sup> The full diameter of the object probe shall not pass through an opening of the enclosure. Due to the simultaneous requirement specified in table 2, the definition “shall not penetrate” is given in table 1.		

### 3.2.2.3 Degree of protection against water indicated by the second characteristic numeral

Second characteristic numeral	Degrees of protection	Application
6	<p>The product must not be harmed in any direction even strong jet water.</p> <p>Water jet hose nozzle Fig.6, Nozzle 12.5 mm diameter</p> <p>Water flow rate: 100 l/min ± 5 % : <b>100 LPM</b></p> <p>Distance: 2.5 m to 3 m: <b>3 m</b></p> <p>Duration of test: 1 min/m<sup>2</sup> at least 3 min: <b>3 min</b></p>	<input checked="" type="checkbox"/>

### 3.3 Testing Image

#### 3.3.1 Test Environment Set-up Images



Probe test



Probe test



Probe test



Probe test



Probe test



Probe test

## Test Environment Set-up Images



Dust test



Dust test



Dust test Monitor



Digital Vacuum Pressure



Water test



Water test

## 4. Test result

### 4.1 Test Result Table

IP code	Evaluation Criteria	Test Results	Remark
IP 6X	No penetration of probe.	<b>Normal</b>	-
	No ingress of dust.	<b>Normal</b>	-
IP X6	No ingress of water.	<b>Normal</b>	-

※ Refer to the sample images after the test is completed. (Clause 4.2)





## 4.2 Post-Test Product Images

### 4.2.1 Product internal images after test [The First characteristic Numeral Test]



#### 4.2.2 Product internal images after test [The Second characteristic Numeral Test]

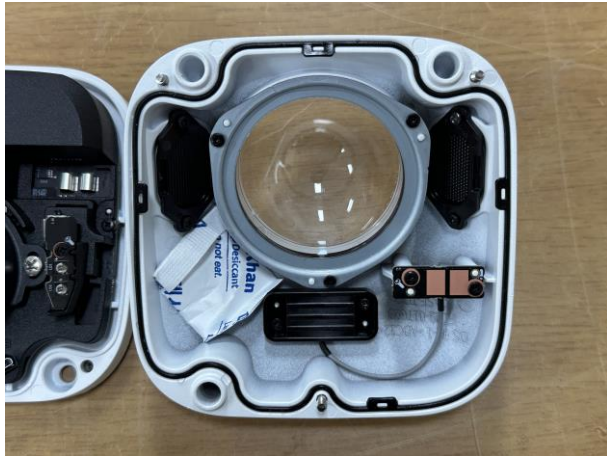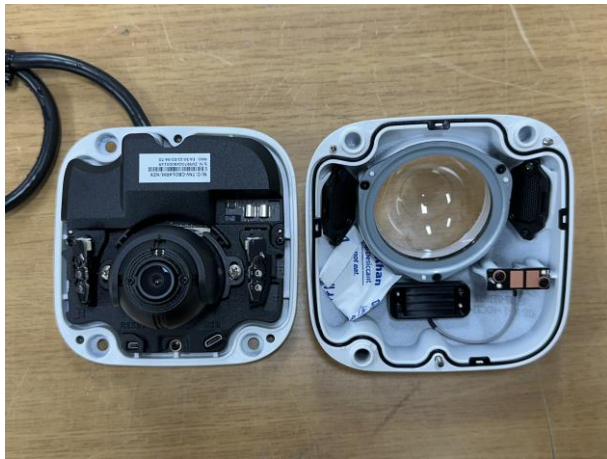

- End -